

GROUP 202 SANDING DISCS - FIBRE BACKED

YORK ABRASIVES

Fibre Discs



Aluminium Oxide General-Purpose Grade

Al-Ox

Resin fibre backed sanding discs are designed for a wide range of industrial applications. High speed penetration of tough and high tensile materials combined with long disc life and optimum flexibility ensure York sanding discs give first class performance every time. Recommended for use with all portable grinders and sanders.



Grit	Weight per 100	Order Code YRK-202	Price/100 TB
100mm Diameter x 16mm Bore Max 12,400rpm			
P24	0.55kg	-2010K	2973.00
P36	0.55kg	-2030K	2973.00
P50	0.45kg	-2050K	2460.00
P60	0.45kg	-2060K	2460.00
P80	0.40kg	-2070K	2460.00
P100	0.35kg	-2080K	2475.00
P120	0.35kg	-2090K	2475.00
115mm Diameter x 22mm Bore Max 11,000rpm			
P24	1.70kg	-2110K	3536.00
P36	1.65kg	-2130K	3536.00
P50	1.60kg	-2150K	3536.00
P60	1.55kg	-2160K	3536.00
P80	1.50kg	-2170K	3536.00
P100	1.50kg	-2180K	3536.00
P120	1.45kg	-2190K	3536.00
178mm Diameter x 22mm Bore Max 7,000rpm			
P24	1.95kg	-2410K	7701.00
P36	1.80kg	-2430K	7334.00
P50	1.55kg	-2450K	6411.00
P60	1.55kg	-2460K	6411.00
P80	1.40kg	-2470K	6037.00
P120	1.30kg	-2490K	6037.00

Zirconium Stainless Steel Grade

Zirc

The zirconia grain is supported by grinding additives which lubricate and cool the area being ground and help prevent clogging, prolonging the effective life of the disc. Suitable for use on all types of stainless steels, weld seams castings and other sophisticated metals for extended periods, removing large amounts of metal without excess heat build up.



Grit	Weight per 25	Order Code YRK-202	Price/100 TB
115mm Diameter x 22mm Bore Max 13,300rpm			
P36	0.65kg	-4130K	5740.00
P50	0.60kg	-4150K	5330.00
P60	0.55kg	-4160K	5074.00
P80	0.80kg	-4170K	4818.00
P100	0.50kg	-4180K	4818.00
P120	0.45kg	-4190K	4818.00

KENNEDY FIBRE DISCS

Fibre Discs

Al-Ox

Aluminium Oxide

Designed for a wide range of applications. High speed penetration of tough and high tensile materials combined with long disc life and optimum flexibility ensure Kennedy sanding discs give first class performance every time. Recommended for use with all portable grinders and sanders.



Grit	Weight per 25	Order Code KEN-202	Price/100 TB
100mm Diameter x 16mm Bore Max 12,400rpm			
P24	0.55kg	-2010K	3420.00
P36	0.55kg	-2030K	3420.00
P50	0.45kg	-2050K	2829.00
P60	0.45kg	-2060K	2829.00
P80	0.40kg	-2070K	2829.00
P100	0.35kg	-2080K	2846.00
P120	0.35kg	-2090K	2846.00
115mm Diameter x 22mm Bore Max 11,000rpm			
P24	0.70kg	-2110K	4066.00
P36	0.65kg	-2130K	4066.00
P50	0.60kg	-2150K	4066.00
P60	0.55kg	-2160K	4066.00
P80	0.50kg	-2170K	4066.00
P100	0.50kg	-2180K	4066.00
P120	0.45kg	-2190K	4066.00
127mm Diameter x 22mm Bore Max 10,000rpm			
P24	0.70kg	-2210K	4656.00
P36	0.80kg	-2230K	4535.00
P50	0.70kg	-2250K	4479.00
P60	0.70kg	-2260K	4245.00
P80	0.60kg	-2270K	4184.00
P100	0.60kg	-2280K	4184.00
P120	0.60kg	-2290K	4184.00
178mm Diameter x 22mm Bore Max 7,000rpm			
P24	1.95kg	-2410K	8855.00
P36	1.80kg	-2430K	8434.00
P50	1.55kg	-2450K	5355.00
P60	1.55kg	-2460K	7375.00
P80	1.40kg	-2470K	6945.00
P100	1.35kg	-2480K	6945.00
P120	1.25kg	-2490K	6945.00

SENATOR QUALITY TOOLING

Fibre Disc Kit

Al-Ox

Aluminium Oxide resin-backed fibre. Long disc life. Optimum flexibility. For metal and wood. For use with portable grinders and sanders.

Contents:

5 each of P24, P36, P60, P80, P120. All discs - 115 x 22mm. Pack of 25 discs.



PACK OF 25


Grit	Weight per 25	Order Code SEN-202	Price/Pk TB
Mixed	0.45kg	-8500K	409.00

YORK ABRASIVES

Adhesive Backed Discs




Adhesive-backed aluminium oxide paper discs requiring no tools to change the disc. When the abrasive becomes worn or a different grit is needed, just peel off and apply a fresh disc, reducing machine downtime therefore increasing productivity.



BEST SELLER

Hole Pattern: 600A. 6 Hole.

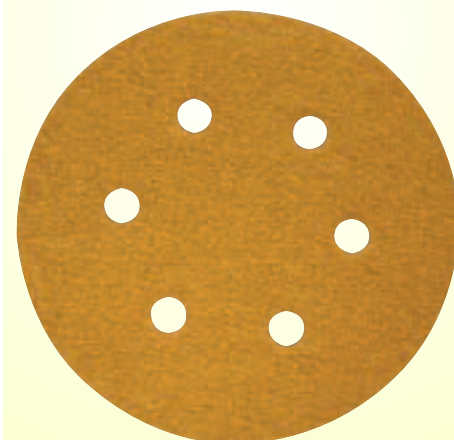


Grade	Weight per 100	Order Code YRK-202	Price/100 TB
P60	540g	-6360K	2122.00
P80	490g	-6370K	2122.00
P100	440g	-6380K	2122.00
P120	420g	-6390K	2122.00
P150	400g	-6400K	2122.00
P180	350g	-6410K	2122.00
P220	350g	-6420K	2122.00

Self-Stick Backing Pads

For use with rotary and orbital sanders. The 125mm pad can be used for discs with or without holes

Thread size: 5/16" x UNF male.

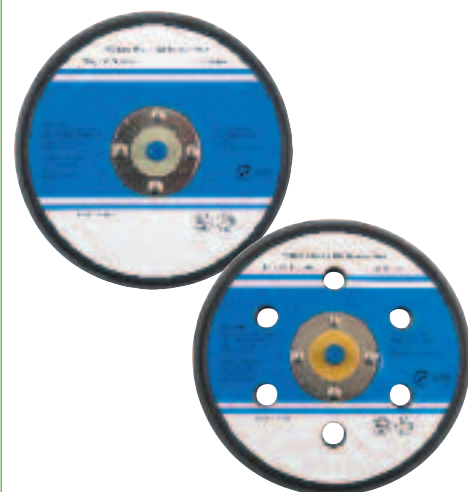

To Suit Disc	Hole Configuration	Order Code KEN-280	Price/1 TB
150mm	No Hole	-3870K	737.00
	6 Hole	-3920K	916.00

ABRASIVES & POWER TOOLS