

Spiral wound with tear-resistant backing fabric. For grinding and finishing edges, profiles, welded joints etc. For use with power tools. Aluminium Oxide for use on most metals.

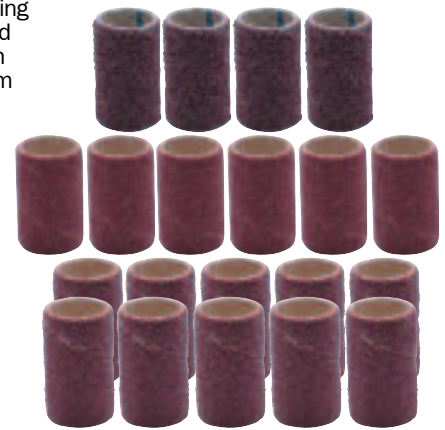

**EXTENDED
RANGE**

* P60 = Coarse, P80 = Medium, P150 = Fine.

Diameter x Width (mm)	Grit*	Weight per 50	Order Code YRK-205	Price/50 TB
10 x 10	P60	20g	-0520K	767.00
	P80	30g	-0550K	767.00
	P150	40g	-0580K	767.00
10 x 20	P60	50g	-0720K	905.00
	P80	50g	-0750K	905.00
	P150	40g	-0780K	905.00
13 x 10	P60	50g	-0920K	731.00
	P80	30g	-0950K	731.00
	P150	30g	-0980K	731.00
13 x 25	P60	90g	-1120K	967.00
	P80	80g	-1150K	967.00
	P150	60g	-1180K	967.00
15 x 10	P60	40g	-1320K	731.00
	P80	40g	-1350K	731.00
	P150	30g	-1380K	731.00
15 x 30	P60	120g	-1520K	905.00
	P80	100g	-1550K	905.00
	P150	80g	-1580K	905.00
19 x 25	P60	140g	-1720K	905.00
	P80	110g	-1750K	905.00
	P150	80g	-1780K	905.00
22 x 20	P60	120g	-1920K	1002.00
	P80	110g	-1950K	1002.00
	P150	80g	-1980K	1002.00
25 x 25	P60	160g	-2120K	1078.00
	P80	150g	-2150K	1078.00
	P150	130g	-2180K	1078.00
30 x 20	P60	160g	-2320K	1091.00
	P80	130g	-2350K	1091.00
	P150	120g	-2380K	1091.00
30 x 30	P60	240g	-2520K	1177.00
	P80	200g	-2550K	1177.00
	P150	180g	-2580K	1177.00
38 x 25	P60	270g	-2720K	1267.00
	P80	220g	-2750K	1267.00
	P150	210g	-2780K	1267.00
45 x 30	P60	380g	-2920K	1539.00
	P80	310g	-2950K	1539.00
	P150	290g	-2980K	1539.00
51 x 25	P60	330g	-3120K	1539.00
	P80	300g	-3150K	1539.00
	P150	320g	-3180K	1539.00
60 x 30	P60	430g	-3320K	1883.00
	P80	400g	-3350K	1883.00
	P150	360g	-3380K	1883.00
75 x 30	P60	670g	-3520K	2352.00
	P80	490g	-3550K	2352.00
	P150	550g	-3580K	2352.00
100 x 40	P60	1100g	-3720K	3331.00
	P80	400g	-3750K	3331.00
	P150	700g	-3780K	3331.00

Sanding Band Kits

Spiral wound with tear-resistant backing fabric. For grinding and finishing edges, profiles, welded joints etc. For use with power tools. Aluminium oxide for use on most metals.



Number of Pieces	Size (mm)	Contents	Order Code YRK-205	Price/1 TB
21	22 x 20	4 x P60 10 x P80 6 x P150 1 x 6mm Shank Holder	-9300K	874.00
20	25 x 25	10 x P60 6 x P80 4 x P150 1 x 6mm Shank Holder	-9320K	760.00
20	51 x 25	10 x P60 6 x P80 4 x P150 1 x 6mm Shank Holder	-9340K	804.00

Drum Holders

Suitable for use with chucks/collets on all portable power and air tools. For use with spiral bound abrasive sanding bands. Self expanding when in use for a secure grip on the band. All shanks are 6mm, except where marked * which have an 8mm shank.



Diameter x Width (mm)	Weight per 5	Order Code YRK-205	Price/1 TB
10 x 10	50g	-4100K	253.00
10 x 20	70g	-4130K	413.00
13 x 10	60g	-4160K	413.00
13 x 25	80g	-4190K	413.00
15 x 10	70g	-4220K	413.00
15 x 30	100g	-4250K	413.00
19 x 25	110g	-4280K	442.00
22 x 20	120g	-4310K	442.00
25 x 25	140g	-4340K	442.00
30 x 20	150g	-4370K	442.00
30 x 30	200g	-4400K	442.00
38 x 25	240g	-4430K	442.00
45 x 30	380g	-4460K	448.00
51 x 25	360g	-4490K	591.00
60 x 30	460g	-4520K	591.00
75 x 30*	1100g	-4550K	856.00
100 x 40*	2100g	-4580K	1915.00

Fitting/Removal Of Bands

Spindle Rotation During Use
(Holder expands)



Band Rotation
(Holder stationary)



Max Operating Speeds (Peripheral = 25m/sec)

Band Dia. (mm)	Max (rpm)	Band Dia. (mm)	Max (rpm)
10	47,500	30	15,800
13	36,500	38	12,500
15	31,500	45	10,500
19	25,000	51	9,300
22	21,500	60	7,900
25	19,000	75	6,300
		100	4,700

GROUP 205 CARTRIDGE ROLLS

YORK
ABRASIVES

Cartridge Rolls

Spirally wound aluminium oxide cloth rolls that wear in use constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications. Available in two types.

A steel mandrel must be used to secure the abrasive to the tool.

Maximum Running Speeds:

Up to 12mm dia. 22,000rpm.

Up to 19mm dia. 18,000rpm.

Up to 25mm dia. 10,000rpm.

Straight Type



Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205	Price/1 TB
3 x 19	CR1	P80	100g	-7010K	26.00
6 x 19	CR3	P120	150g	-7020K	26.00
6 x 25	CR4	P80	200g	-7050K	26.00
6 x 25	CR4	P120	200g	-7070K	26.00
6 x 25	CR4	P120	200g	-7080K	26.00
6 x 38	CR4	P80	200g	-7250K	29.00
6 x 38	CR4	P120	200g	-7260K	44.00
9.5 x 25	CR5	P80	265g	-7090K	21.00
9.5 x 38	CR6	P80	400g	-7110K	26.00
9.5 x 38	CR6	P120	400g	-7120K	31.00
12 x 38	CR8	P60	670g	-7150K	31.00
12 x 38	CR8	P80	670g	-7155K	41.00
12 x 38	CR8	P120	670g	-7160K	41.00
19 x 38	CR10	P60	1500g	-7190K	53.00
19 x 38	CR10	P120	1500g	-7200K	49.00

Mandrels

For use with Cartridge Rolls. This steel adaptor is used to secure and hold both tapered and parallel sided cartridge rolls to air grinders or electric drills. This holder is used by sliding the cartridge roll onto the mandrel pilot until the bottom of the abrasive touches the threaded steel area. Simply screw the cartridge roll onto the threads to secure. Your mandrel should be at least 13mm longer than your cartridge roll.



Shank Diameter	Type	To suit Rolls	Weight per 5	Order Code YRK-205	Price/1 TB
3mm	CRM1	CR1	35g	-7510K	231.00
3mm	CRM2	CR2	35g	-7520K	231.00
6mm	CRM3	CR3	55g	-7530K	267.00
6mm	CRM4	CR4 CR5 CR7 CRT1 CRT2 CRT4 CR6 CR8	55g	-7540K	267.00
6mm	CRM5	CRT3 CRT5 CRT6	55g	-7550K	267.00
6mm	CRM6	CR9	75g	-7560K	267.00
6mm	CRM7	CR10 CR11	80g	-7570K	267.00



Taper Type

Tapered for angles, corners and irregular or concave surfaces.



Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205	Price/1 TB
9.5 x 25	CRT1	P60	235g	-7310K	44.00
9.5 x 25	CRT1	P120	235g	-7320K	44.00
9.5 x 38		P80	256g	-7315K	44.00
12 x 25	CRT2	P60	270g	-7330K	50.00
12 x 38		P60		-7350K	50.00
12 x 38	CRT3	P80	460g	-7355K	50.00
12 x 38	CRT3	P120	460g	-7360K	52.00

Cartridge Roll Kit

Spirally wound aluminium oxide cloth roll that wears in use, constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications.

Contents:

Straight type rolls: 6 - 10 x 38mm P80 and P120, 4 - 13 x 38mm P80 and P120, 12 - 6 x 38mm P80 and P120, 16 - 6 x 25mm P80 and P125, 6 - 10 x 25mm P80 and P120.

Taper type rolls: 6 - 10 x 38mm P80. 6 - 13 x 38mm P80.

Mandrels:

1 - 3 x 25 x 6mm.

1 - 3 x 19 x 6mm.

**122
PIECES**



Description	Order Code YRK-205	Price/1 TB
122 Piece Cartridge Roll Kit	-9800K	2888.00