

GROUP 230 CUTTING & GRINDING DISCS

YORK
ABRASIVES

Depressed Centre Cutting & Grinding Discs

- Grade A30** - For general-purpose use on metals.
Grade C24 - For use on stone and non-ferrous materials.
Grade R30 - For use on stainless steel.
Grade X24 - Special, for use on cast iron.

Type 27 Depressed Centre Grinding

Manufactured to assure operator safety and optimum performance. For use with all portable angle grinders. Not to be used for 'free hand' or wet grinding.


Optimum angle for use
25 to 35°.



Size (mm)	Box Quantity	Grade	Weight Per 50	Order Code YRK-230	Price/1 TB
100 x 5 x 16	25	A30RBF	4.20kg	-0120K	63.00
100 x 6 x 16	25	A30RBF	6.20kg	-0160K	68.00
115 x 5 x 22	25	A30RBF	5.80kg	-1120K	79.00
115 x 6 x 22	25	A30RBF	8.00kg	-1160K	79.00
125 x 6 x 22	25	A30RBF	9.40kg	-2160K	96.00
180 x 5 x 22	10	A30RBF	14.2kg	-3120K	141.00
180 x 6 x 22	10	A30RBF	18.4kg	-3160K	147.00
180 x 6 x 22	10	R30RBF	18.4kg	-3660K	158.00
230 x 6 x 22	10	A30RBF	28.8kg	-4160K	209.00
230 x 6 x 22	10	X24RBF	26.0kg	-4180K	209.00

Type 42 Depressed Centre Cutting

Manufactured to assure operator safety and optimum performance. For use with all portable grinders/cut-off machines. Not to be used for 'free hand' cutting and importantly not to be used for grinding.



Size	Grade	Weight Per 50	Order Code YRK-230	Price/1 TB
100 x 3 x 16	A30TBF	3.30kg	-0080K	38.00
115 x 3 x 22	A30TBF	3.90kg	-1080K	68.00
125 x 3 x 22	A30RBF	4.30kg	-2080K	79.00
180 x 3 x 22	A30TBF	10.6kg	-3080K	108.00
230 x 3 x 22	A30RBF	15.0kg	-4080K	164.00

Flat Reinforced Cutting Discs



- Grade A30** - For general-purpose use on metals.
Grade C24 - For use on stone and non-ferrous materials.
Grade R30 - For use on stainless steel.
Grade X24 - Special, for use on cast iron.

Type 41 Flat Reinforced Cutting

Manufactured to assure operator safety and optimum performance. For use with all portable angle grinders. 180mm to 230mm discs can also be used on circular saws and 300 to 350mm discs are for use with chop saws/cut-off machines, subject to bore compatibility. Not to be used for wet cutting.



Size (mm)	Grade	Weight Per 50	Order Code YRK-230	Price/1 TB
100 x 3 x 16	A30RBF	2.60kg	-5080K	63.00
100 x 3 x 16	C24RBF	2.60kg	-5800K	63.00
115 x 3 x 22	A30TBF	4.00kg	-6080K	63.00
115 x 3 x 22	C24RBF	3.50kg	-6800K	63.00
125 x 3 x 22	A30RBF	4.20kg	-6950K	68.00
125 x 3 x 22	C24TBF	4.30kg	-7000K	68.00
180 x 3 x 22	A30TBF	9.20kg	-7080K	85.00
180 x 3 x 22	C24TBF	8.50kg	-7800K	85.00
230 x 3 x 22	A30TBF	15.0kg	-8080K	141.00
230 x 3 x 22	C24TBF	14.6kg	-8800K	141.00
300 x 3 x 20	A30RBF	18.8kg	-9080K	149.00
300 x 3 x 20	C24RBF	25.0kg	-9090K	149.00
300 x 3 x 22	A30RBF	28.8kg	-9800K	149.00
300 x 3 x 22	C24RBF	25.0kg	-9810K	149.00
355 x 3 x 25	A24NBF	34.6kg	-9920K	333.00





Depressed Centre & Flat Reinforced Cutting & Grinding Discs

All Kennedy Depressed Centre and Flat Reinforced Cutting Wheels now carry the "oSa" (The Organisation for the Safety of Abrasives) mark of approval. "oSa" is an association of the world's leading abrasives manufacturers. In France, it is mandatory to use only oSa-certified rough grinding wheels and cutting wheels.

Similarly in Germany and Italy, it is strongly recommended that abrasive products conform to the relevant EN standards. "oSa" marked products are guaranteed to meet or exceed the highest worldwide safety standards, including those of the Comité Européen de Normalisation (CEN), the European standards body that issues EN standards, and of ANSI in the USA.




Type 27 Depressed Centre Grinding

For use with all portable angle grinders. Not to be used for 'free hand' or wet grinding.

Optimum angle for use 25 to 35°.


Grade A30/AS30 - For general-purpose use on metals.

INOX - For use on stainless steel (iron, chlorine and sulphur free).

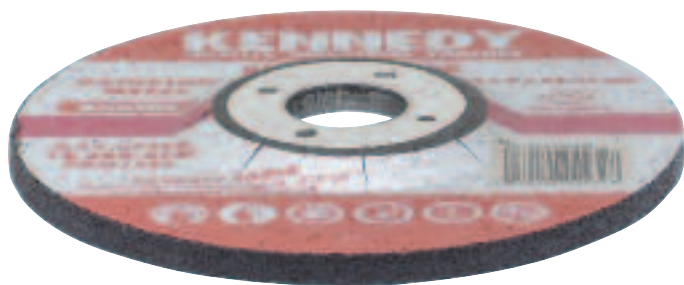

Type 41 Flat Reinforced Cutting

For use with all portable angle grinders. 180mm to 230mm discs can also be used on circular saws, and 300 to 350mm discs are for use with chop saws/cut-off machines, subject to bore compatibility. Not to be used for wet cutting.



Grade A24/A36 - For general-purpose cutting on metals.

Grade C24 - For general-purpose cutting on stone.

Size (mm)	Grade	Weight Per 50	Order Code KEN-230	Price/1 TB
50 x 4 x 9.6	A60-QBF	1.07kg	-0040K	158.00
50 x 4 x 9.6	A80-QBF	1.02kg	-0050K	158.00
50 x 4 x 9.6	A120-QBF	0.90kg	-0060K	158.00
100 x 4 x 16	A30-TBF	4.20kg	-0120K	74.00
100 x 6 x 16	A30-TBF	6.20kg	-0160K	79.00
115 x 4 x 22.23	AS30-RBF	5.80kg	-1120K	63.00
115 x 6 x 22.23	A30-TBF	8.00kg	-1160K	74.00
125 x 6 x 22.23	A30-TBF	9.40kg	-2160K	85.00
180 x 6 x 22.23	A30-TBF	18.4kg	-3160K	113.00
230 x 6 x 22.23	A30-TBF	28.8kg	-4160K	250.00
230 x 6 x 22.23	AS30-INOX-BF	26.0kg	-4200K	282.00



Type 42 Depressed Centre Cutting

For use with all portable grinders/cut-off machines. Not to be used for 'free hand' cutting and importantly not to be used for grinding.

Size (mm)	Grade	Weight Per 50	Order Code KEN-230	Price/1 TB
100 x 3 x 16	A24-RBF	2.60kg	-5080K	63.00
100 x 3 x 16	C24-RBF	2.60kg	-5800K	63.00
115 x 3 x 22.23	A24-RBF	4.00kg	-6080K	74.00
115 x 3 x 22.23	C24-RBF	3.50kg	-6800K	74.00
125 x 3 x 22.23	A24-RBF	4.20kg	-6950K	96.00
180 x 3 x 22.23	A24-RBF	9.20kg	-7080K	141.00
230 x 3 x 22.23	A24-RBF	15.0kg	-8080K	158.00
230 x 3 x 22.23	C24-RBF	14.6kg	-8800K	158.00
350 x 3 x 25.4	A36-RBF	34.6kg	-9920K	311.00

Inox Cut-Off Discs

For stainless steel (iron, chlorine and sulphur-free).



Grade A24/A46 - For general purpose cutting on metals.

Size (mm)	Grade	Weight Per 50	Order Code KEN-230	Price/1 TB
76 x 1.8 x 9.6	A46RBF	0.84kg	-0020K	75.00
100 x 3 x 16	A24RBF	3.30kg	-0080K	45.00
115 x 3 x 22.23	A24RBF	3.90kg	-1080K	51.00
125 x 3 x 22.23	A24RBF	4.30kg	-2080K	63.00
180 x 3 x 22.23	A24RBF	10.6kg	-3080K	124.00
230 x 3 x 22.23	A24RBF	15.0kg	-4080K	108.00

Diameter x Thickness x Bore (mm)	Grade	Order Code KEN-230	Price/1 TB
100 x 1.0 x 16.00	AS60T-INOX-BF	-4410K	74.00
115 x 1.0 x 22.23	AS60T-INOX-BF	-4430K	85.00
115 x 1.6 x 22.23	AS46T-INOX-BF	-4440K	96.00
125 x 1.0 x 22.23	AS60T-INOX-BF	-4460K	108.00
125 x 1.6 x 22.23	AS46T-INOX-BF	-4470K	113.00
180 x 1.6 x 22.23	AS46T-INOX-BF	-4500K	158.00
230 x 1.9 x 22.23	AS46T-INOX-BF	-4540K	187.00