




**Portable Optical Refractometer**



For determining the concentration of oil in water emulsions and transparent solutions, such as machine shop coolant. Maintaining the correct mixture in coolant systems is vital to ensure optimum performance from cutting tools. To protect the machine and workpiece from corrosion and to reduce the risk of health hazards arising from incorrect concentrations of water soluble oils. To economise the use of water base cutting fluids and grinding fluids.



**Lens for Portable Refractometer**

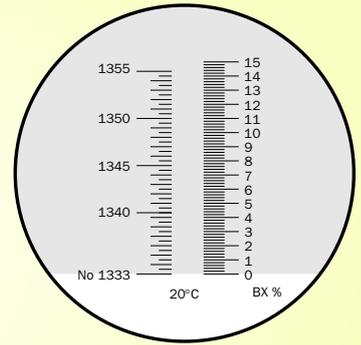

**Calibrated Refractive Scale**

**Specifications:**

**Range ND:** 1.333 - 1.356. Bx: 0 - 15%.

**Eyepiece magnification:** 11x.

**Telescopic lens magnification:** 4x.

**Accuracy:** ±0.0003 ±0.2%

**Lattice value:** 0.0005 0.2%

Supplied in high quality fitted metal case complete with calibration screwdriver and operator manual.

**Refractometer**

Dimensions	Weight each	Order Code <b>OXD-336</b>	Price/1 TB
38 x 38 x 185mm	30g	<b>-1010K</b>	<b>6431.00</b>

**Spares**

Description	Weight each	Order Code <b>OXD-398</b>	Price/1 TB
Lens for Portable Refractometer	10g	<b>-3630K</b>	<b>541.00</b>

**KENNEDY Steel Gauge Block Sets**



Supplied in high quality wooden bench cases, complete with certificate of calibration. Available in two grades. Manufactured to **BS EN ISO 3650**. Complete with **UKAS** Certificate of Calibration.

**Grade 2: For Workshop Use**

Number of Pieces	Range (inclusive)	Increments	Weight each	Order Code <b>KEN-338</b>	Price/1 TB
<b>36 Piece Inch</b>					
(2)	.05"-.10"	.05"	2.4kg	<b>-3360K</b>	<b>12699.00</b>
(9)	.1001-.1009"	.0001"			
(9)	.101-.109"	.001"			
(9)	.110-.190"	.010"			
(4)	.2-.5"	.10"			
(3)	1, 2 & 4"				
<b>81 Piece Inch</b>					
(9)	.1001-.1009"	.0001"	4.0kg	<b>-3810K</b>	<b>25092.00</b>
(49)	.101-.149"	.001"			
(19)	.05-.95"	.05"			
(4)	1-4"	1"			
<b>47 Piece Metric</b>					
(1)	1.005mm		2.1kg	<b>-4470K</b>	<b>15402.00</b>
(9)	1.01-1.09mm	.01mm			
(9)	1.1-1.9mm	.1mm			
(24)	1-24mm	1mm			
(4)	25-100mm	25mm			
<b>88 Piece Metric</b>					
(1)	1.0005mm		2.8kg	<b>-4880K</b>	<b>26673.00</b>
(9)	1.001-1.009mm	.001mm			
(49)	1.01-1.49mm	.01mm			
(20)	.5-10mm	.5mm			
(9)	20-100mm	10mm			

**Grade 1: For Inspection Use**

Number of Pieces	Range (inclusive)	Increments	Weight each	Order Code <b>KEN-339</b>	Price/1 TB
<b>81 Piece Inch</b>					
(9)	.1001-.1009"	.0001"	4.0kg	<b>-4810K</b>	<b>31059.00</b>
(49)	.101-.149"	.001"			
(19)	.05-.95"	.05"			
(4)	1-4"	1"			
<b>47 Piece Metric</b>					
(1)	1.005mm		2.4kg	<b>-5470K</b>	<b>21624.00</b>
(9)	1.01-1.09mm	.01mm			
(9)	1.1-1.9mm	.10mm			
(24)	1-24mm	1mm			
(4)	25-100mm	25mm			
<b>88 Piece Metric</b>					
(1)	1.0005		2.8kg	<b>-5880K</b>	<b>31467.00</b>
(9)	1.001-1.009mm	.001mm			
(49)	1.01-1.49mm	.01mm			
(20)	.5-10mm	.5mm			
(9)	20-100mm	10mm			



**PRECISION EQUIPMENT**

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**