



Made of alloy case steel. All working surfaces are hardened and precision ground.

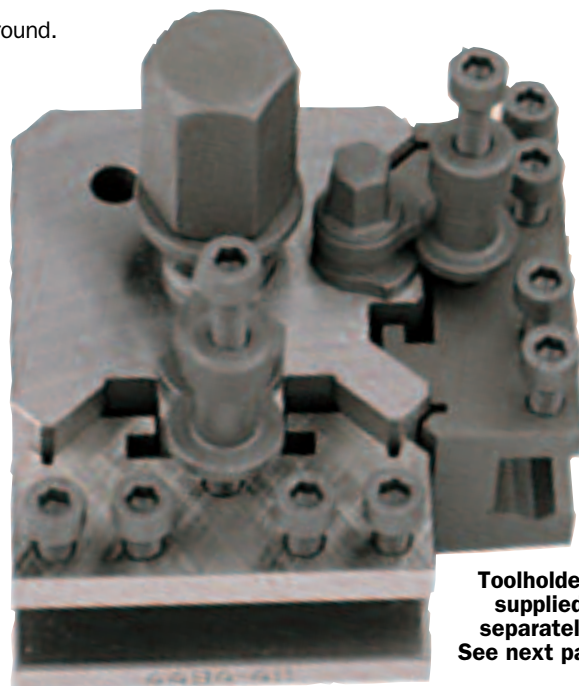

Toolposts Type T.00 - T.0

Set-up for 2 Toolholders

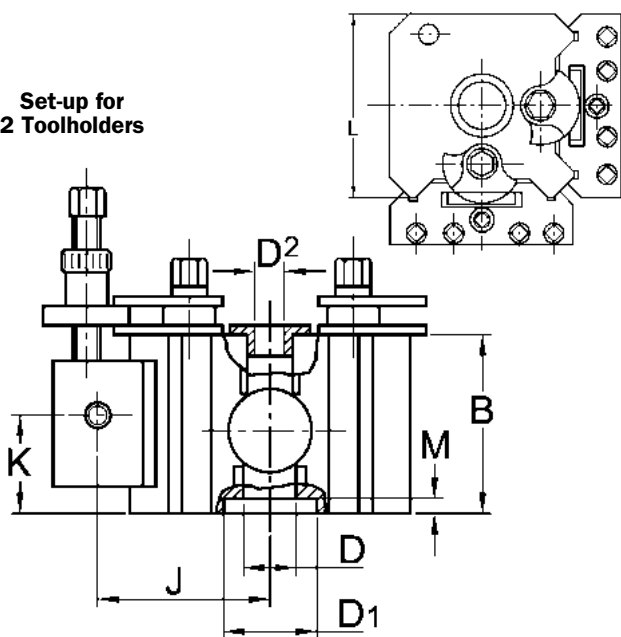



Toolholders supplied separately. See next page.

Type	No. of Toolholders	Lathe Capacity	B	D1 Dia.	M Depth	D	E	G	F	H1 Max	H1 Min.
T.00M	2	Up to 89mm	37.0	-	-	11.2	-	10	11	27	17
T.0	3	Up to 114mm	51.0	22.22	5.0	19.0	124	13	13	36.5	20.5

Type	Bar dia. d Max.	H Max.	H Min.	Taper	J	K Max.	K Min.	L	D2	Weight each	Order Code IND-445	Price/1 TB
T.00M	11.0	22.5	12.5	-	-	-	-	58.0	-	0.90kg	-4800K	12000.00
T.0	16.0	32.0	16.0	1	52.5	28.5	16.0	73.0	16.0	2.00kg	-4820K	15000.00

Toolposts Type T.1 - T.3

Set-up for 3 Toolholders

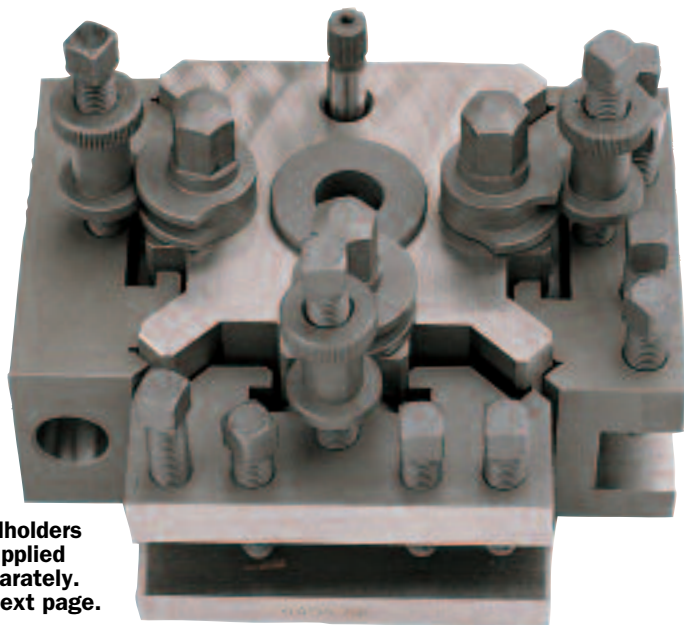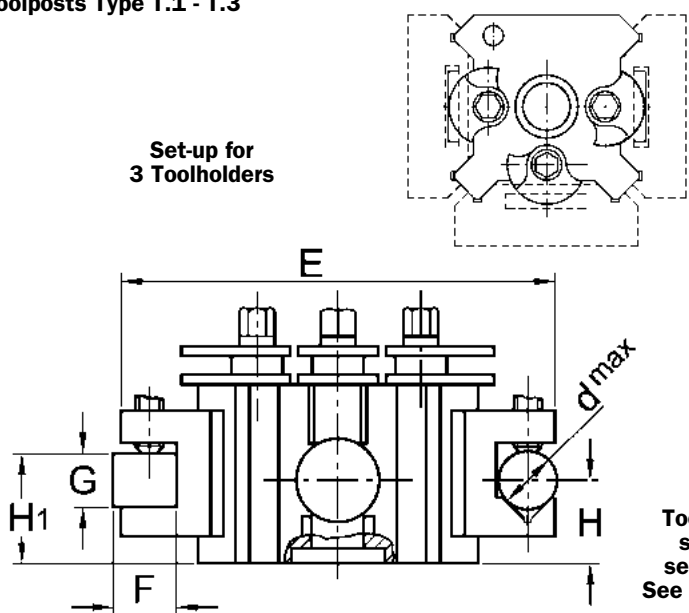


Toolholders supplied separately. See next page.

Type	No. of Toolholders	Lathe Capacity	B	D1 Dia.	M Depth	D	E	G	F	H1 Max	H1 Min.
T.1	3	114 to 127mm	63.5	31.75	6.5	19.0	124	19	13	46	30
T.1X	3	114 to 127mm	73.0	31.75	6.5	19.0	124	19	13	57	35
T.2	3	127 to 203mm	71.5	44.45	8.0	25.5	159	19	19	54	36.5
T.2T	3	127 to 203mm	76.0	44.45	8.0	25.5	168	25.5	25.5	58.5	39.5
T.3	3	203 to 292mm	92.0	50.80	9.5	25.5	203	31.5	22.5	73	51


Type	Bar dia. d Max.	H Max.	H Min.	Taper	J	K Max.	K Min.	L	D2	Weight each	Order Code IND-445	Price/1 TB
T.1	16.0	44.5	25.5	1	52.5	41.0	22.0	73.0	16.0	2.30kg	-4830K	16500.00
T.1X	16.0	54.0	32.0	1 & 2	52.5	51.0	28.5	73.0	16.0	2.60kg	-4840K	17500.00
T.2	19.0	46.0	24.0	2	65.0	47.5	27.0	98.5	16.0	4.60kg	-4850K	19500.00
T.2T	19.0	50.0	24.0	2 & 3	70.0	47.5	27.0	106.5	16.0	5.80kg	-4860K	22000.00
T.3	25.5	51.0	28.5	3	85.5	58.5	36.5	125.5	22.0	10.8kg	-4870K	28000.00

Standard Type

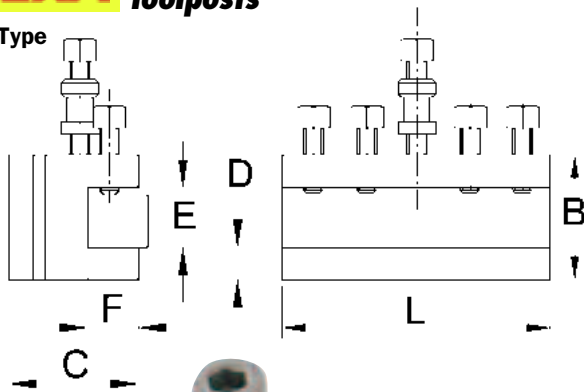

Used On	L (mm)	B	C	D	E	F	Order Code IND-445	Price/1 TB
T.00	58.0	27.0	28.0	7.0	13.0	11	-5010K	3000.00
T.0	73.0	35.0	32.0	8.0	16.0	14	-5020K	4500.00
T.1	73.0	44.5	32.0	11.0	22.0	14	-5030K	6000.00
T.2	98.5	50.0	40.0	12.0	22.0	19	-5040K	7000.00
T.2T	98.5	57.0	40.0	14.0	28.5	19	-5050K	7250.00
T.3	124.0	70.0	48.5	17.5	35.0	23	-5060K	8500.00


Parting Off Type

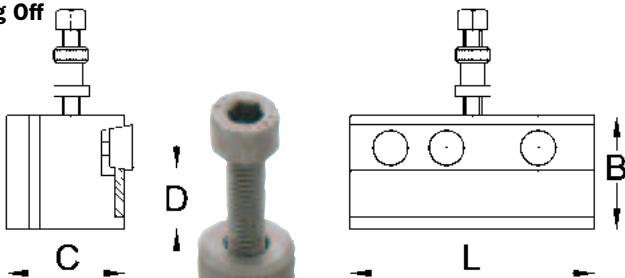

Used On	L (mm)	B	C	D	Order Code IND-445	Price/1 TB
T.0/T.1	73.0	47.5	32.0	27.0	-5370K	7350.00
T.2	98.5	57.0	39.5	33.5	-5380K	9450.00



Vee Type

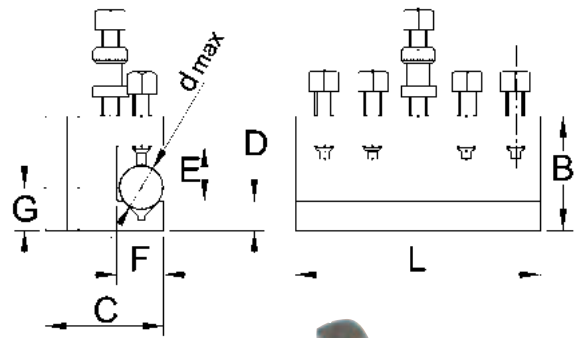

Used On	L (mm)	B	C	D	E	F	G	d Max	Order Code IND-445	Price/1 TB
T.00	58.0	27.0	28.0	8.0	13.0	11	13.5	11.0	-5110K	4000.00
T.0	73.0	35.0	32.0	8.0	16.0	14	16.0	16.0	-5120K	3500.00
T.1	73.0	44.5	32.0	16.0	17.0	14	24.0	16.0	-5130K	6500.00
T.2	98.5	50.0	40.0	14.0	22.0	19	24.0	19.0	-5140K	7500.00
T.2T	98.5	57.0	40.0	14.0	28.5	19	24.0	19.0	-5150K	7600.00
T.3	124.0	70.0	48.5	17.5	35.0	23	28.5	25.5	-5160K	8150.00

Industrial Lathe Carriers

Available with straight or bent tail. Manufactured from high grade, malleable cast iron with high tensile strength. Smooth action square head clamping screw.



Straight

Type	Capacity	Weight each	Order Code IND-445	Price/1 TB
Straight	12.5mm	0.10kg	-9000K	1100.00
	19.0mm	0.15kg	-9010K	1300.00
	25.0mm	0.30kg	-9020K	1500.00
	38.0mm	0.70kg	-9040K	2200.00
	50.0mm	1.50kg	-9060K	3500.00



Bent

Type	Capacity	Weight each	Order Code IND-445	Price/1 TB
Bent	12.5mm	0.10kg	-9200K	1500.00
	19.0mm	0.15kg	-9210K	1650.00
	25.0mm	0.30kg	-9220K	1950.00
	38.0mm	0.70kg	-9240K	2500.00
	50.0mm	1.50kg	-9260K	3500.00