

KENNEDY 7-Piece Panel Beating Set

Supplied in a high quality fitted blow moulded impact resistant case. Drop forged, high carbon steel hammers with ground heads and cheeks. Hickory, octagonal section shafts. 1x: curved, utility, heel and toe dolly. 1x: 12oz shrinking hammer and flat faced bumping hammer, 1x 10oz round finishing pick.



**7
PIECES**



Number of Pieces	Weight each	Order Code KEN-503	Price/1 TB
7	7.40kg	-7650K	7308.00

Dent Puller Set

For repairing dents in body panels. Supplied complete with self tapping pull screw for use where access to the rear of the panel is blocked by reinforcements or other parts, a range of steel hooks and pull curls for pulling the edges of panels and a chain and hook. The long hammer shaft allows the pulling/striking force to be precisely controlled.

Contents: (1x) hammer (10lbs cast iron), 22.5Ø x 500 and 22.5Ø x 200mm pipes, 2 hole pipes, 6 x 170, 6 x 120, 6 x 200 and 3mm x 100mm plates, chain and hook, hex nut and blow moulded storage case.



**9
PIECES**

Model Number	Weight each	Order Code KEN-503	Price/1 TB
DP9	9.00kg	-3460K	4002.00


Panel Beating Dollies

Manufactured from drop forged medium carbon steel (SAE/AISI 1055). Heat-treated with a polished mirror finish.



Grid Dolly

For shrinking work. With a large crowned grid face on the surface and a plain flat face on the base this dolly, combined with a shrinking hammer and the use of heat, provides quick and effective shrinking.



Length (mm)	Order Code KEN-503	Price/1 TB
120	-7500K	1519.00

Double-End Hand Dolly

For reshaping crowned panels and general panel beating.



Length (mm)	Order Code KEN-503	Price/1 TB
758	-7520K	948.00

Utility Dolly


Double-sided multi-purpose. Use the edge most suited to the size and shape of a damaged flange.



Length (mm)	Order Code KEN-503	Price/1 TB
64	-7540K	948.00

Toe Dolly (Low Crown Dolly)


For reshaping. Can be used in the hand to deliver a series of blows to the underside of the panel. Long crown enables use in hard to reach areas.



Length (mm)	Order Code KEN-503	Price/1 TB
120	-7560K	1107.00

Curved Dolly


For raising low spots on panels. The edge can also be used to restore the shape of a roof and reform beads.



Length (mm)	Order Code KEN-503	Price/1 TB
132	-7580K	1185.00

Heel Dolly

For general reshaping of contoured panels, raising low spots and general panel beating.



Length (mm)	Order Code KEN-503	Price/1 TB
81	-7600K	953.00

Spot Weld Remover

Suitable for cutting holes in steel metal, steel, plastic and brass. The hardened steel cutter is reversible increasing tool life. Adjusting the spring loaded centre point screw accurately controls the depth of cut allowing the top to be removed whilst leaving the lower panel in place.



Capacity (mm)	Shank (mm)	Maximum Rated Operating Speed	Weight each	Order Code KEN-503	Price/1 TB
10	6.5	900rpm	30g	-1200K	720.00

3 Piece Panel Seam Splitter Set

Ideal for separating spot-welded panels during repairs. Stainless steel coated chrome vanadium with through tang shafts allow use with hammers. Dual material soft grip handles for comfort and control. Includes 90°, curved and straight seam splitters. Cushioned handle absorbs any shock from hammer blows. Made from super tough alloy steel.



**3
PIECES**

Number of Pieces	Weight each	Order Code KEN-503	Price/1 TB
3	94g	-7710K	3605.00

Trim Pin Remover

Designed for removing vehicle trim panels and upholstery. Also used for replacing door locks, window mechanisms and general bodywork repairs.



Overall Length	Weight each	Order Code KEN-503	Price/1 TB
230mm	155g	-1500K	361.00

KENNEDY Lever Operated Vacuums

For use in hand lift applications only. Multiple vacuums used on a single load can only improve handling. If using more than one vacuum tool the ratio of maximum lift capacity does not increase. To lift heavier weights a larger vacuum must be used. All are fitted with a rubber suction cap which will not damage contact surface during the lifting action. For use on glass and plastic or any smooth surface material and can also be used for pulling out dents.

Single (VLS045)
Double (VLD070)
Triple (VLT070)



Model Number	Cups	Max Lift	Order Code KEN-503	Price/1 TB
VLS045	1x10cm	45kg	-2620K	530.00
VLD070	2x12cm	70kg	-2640K	1622.00
VLT070	3x12cm	110kg	-2660K	2343.00

Filler Applicators

100mm wide plastic spreader, suitable for the application of auto body filler.




PACK OF 5

Pack Quantity	Size	Order Code KEN-503	Price/1 TB
5	100mm (4")	-2820K	258.00

Auto Body Filler Applicator Set

4 Piece Set
Spring steel blades with composite grips. Suitable for the application of auto body filler.

Blade widths:
12, 25, 50 and 75mm.
Size (W x H x D):
123 x 210 x 5mm.




4 PIECES

Description	Order Code KEN-503	Price/Pk TB
Auto Body Filler Applicators	-2825K	361.00

Universal Door Handle Clip Remover


Removes door panel clips without breakage. Simple action - insert the tool and push the clip out.



Size (mm) (W x H x D)	Weight each	Order Code KEN-503	Price/1 TB
84 x 254 x 30	45g	-2790K	176.00

Folding Windscreen Stand

Lightweight tubular steel design with chain stops, foam protection and rubber feet. Large rubber suckers prevent screen from moving during preparation.

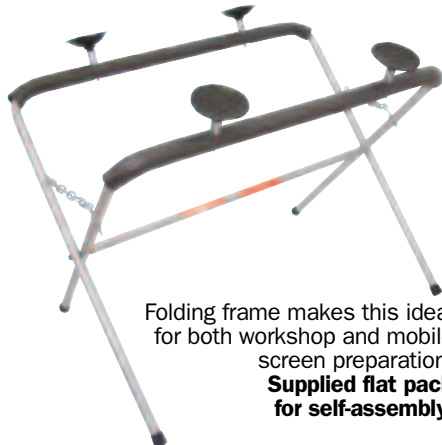

Folding frame makes this ideal for both workshop and mobile screen preparation.
Supplied flat pack for self-assembly.

Type	Weight each	Order Code KEN-503	Price/1 TB
Windscreen Stand	7.6kg	-2890K	8069.00

Windscreen Moulding Release Tool

Removes trim moulding around cemented windscreen and rear windows quickly and easily.



Type	Weight each	Order Code KEN-503	Price/1 TB
Windscreen Release Tool	90g	-2810K	313.00

Wax Injector Gun

WIG100
Pneumatic tool for spraying and injecting wax underseal into areas that are difficult to access, such as door cavities, inside box section chassis and around wheel arches. Has a 1ltr container with a 1/4" NPT connection, operates from 90 - 145psi (6 - 10bar) air pressure with an air consumption rate of 380ltr/min and a vacuum of (maximum) 550mm HG. Supplied with 900mm spray hose and hanging hook.



1 LTR

Size	Order Code KEN-503	Price/1 TB
1ltr	-1880K	2575.00

Universal Trim Pad Remover

For removing plastic interior trim retaining studs. Corrosion-resistant.



Size (mm) (W x H x D)	Weight each	Order Code KEN-503	Price/1 TB
84 x 259 x 30	135g	-2800K	307.00

Glass Run Channel Cleaner

Automotive glass run channel cleaners are for the fast removal of glass, chips and debris from run channels on side windows. Suitable for unhooking locking weather strips around windcreens, with a long shaft for reaching deep into door recess. Manufactured from hardened and tempered chrome vanadium steel with a comfort grip.



-8730K



-8710K

-8720K

Overall Length	Weight each	Order Code KEN-503	Price/1 TB
260mm	150g	-8710K	335.00
330mm	190g	-8720K	361.00
610mm	190g	-8730K	464.00

Automotive Curved Hook Tools

Curved hook tools are for inserting and removing rubber seals and gaskets, they feature a long shaft and curved head for smooth operation in both directions. Manufactured from hardened and tempered chrome vanadium steel with a comfort grip.



Overall Length	Weight each	Order Code KEN-503	Price/1 TB
230mm	120g	-8760K	464.00
295mm	150g	-8770K	567.00

Windscreen Wiper Arm Removal Tool

Windscreen wiper arm removal tool for removing stuck and stubborn taper fitting wiper arms.

Maximum opening: 27mm.
Collar size: 15mm.



Description	Order Code KEN-503	Price/1 TB
Windscreen Wiper Arm Removal Tool	-1570K	773.00

KENNEDY Hydraulic Body Repair Kits

Porta Power with Ram & Spreader

Used for clamping, pulling, bending, straightening, spreading and lifting operations. Snaps together. Heavy-duty hand pump has automatic overload feature. Tough, blow moulded case. Strong flexible hose with spring guards at both ends. 10,000PSI hydraulic hand pump, ½ Tonne ram and spreader.



Kit Size	Stroke Length	Order Code KEN-503	Price/1 TB
4 Tonne	100mm	-7240K	9784.00
10 Tonne	150mm	-7260K	19363.00

Body Repair Kit Spares

Description	Size	4 Tonne		Size	10 Tonne	
		Order Code KEN-567	Price/1 TB		Order Code KEN-567	Price/1 TB
Spreader Ram	-	-8240K	1803.00	-	-8240K	1803.00
Spreader Ram Repair Kit	-	-8250K	155.00	-	-8250K	155.00
Small Extension Tube	100mm	-8280K	258.00	125mm	-8420K	613.00
Medium Extension Tube	200mm	-8290K	361.00	250mm	-8430K	716.00
Long Extension Tube	305mm	-8300K	464.00	355mm	-8440K	819.00
Extra Long Extension Tube	410mm	-8310K	567.00	480mm	-8450K	979.00
Double Ended Male Snap Connector	-	-8320K	180.00	-	-8460K	450.00
Flat Base	114x63mm	-8330K	304.00	150x95mm	-8470K	670.00
90° V' Base	-	-8340K	232.00	-	-8480K	361.00
Wedge Head	-	-8350K	201.00	-	-8490K	304.00
Spread Plunger Toe	-	-8360K	258.00	-	-8500K	550.00
Spreader Ram Toe	-	-8370K	361.00	-	-8510K	650.00
Rubber Head	67mm ø	-8380K	361.00	75mm ø	-8520K	335.00
Serrated Saddle	35mm ø	-8390K	201.00	46mm ø	-8530K	258.00
Seal Repair Kit	-	-8000K	258.00	-	-8020K	567.00
Replacement Blow Mould Case	-	-8400K	1350.00	-	-8540K	2999.00

Single Speed Hydraulic Hand Pumps

Rugged construction with an internal overload valve, a pressure rating of 10,000psi (700bar) and a ¼ NPT thread size. Operates in a vertical and horizontal position.



Model Number	Pressure Rating PSI (Bar)	Usable Oil Capacity	Oil Volume Per Stroke	Oil Port Thread	Length (mm)
HPS035	10,000 (700)	350cc	3.2cc	¼ NPT	292
HPS060	10,000 (700)	600cc	3.2cc	¼ NPT	478

Model Number	Weight each	Order Code KEN-503	Price/1 TB
HPS035	5.70kg	-8800K	5923.00
HPS060	7.10kg	-8820K	8342.00

Spares

Description	Order Code KEN-567	Price/1 TB
Connection Hose (1500mm x ¼" NPT)	-8120K	1803.00
Repair kit for HPS035	-8050K	464.00
Repair kit for HPS060	-8060K	464.00

Hydraulic Push Rams

Rugged construction with a heavy-duty return spring. Chrome plated piston inhibits rusting. ¼ NPT thread size. Accessories easily snap on.



Model Number	Capacity (Tonne)	Stroke (mm)	Oil Cap (cc)	Cylinder Bore dia.	Length Ret.	Length Ext.	Outside dia. Piston	Oil Port Thread
HRP004	4	100	65	28.5mm	230	330	22 38	¼ NPT
HRP010	10	150	243	45.0mm	325	475	33 57	¼ NPT

Model Number	Weight each	Order Code KEN-503	Price/1 TB
HRP004	1.80kg	-7170K	3501.00
HRP010	5.30kg	-7190K	9528.00

Twin Speed Hydraulic Hand Pumps

Rugged construction. Internal overload valve prevents it from being used beyond rated capacity. Operates in a vertical and horizontal position. Pressure rating 10,000psi (700bar). ⅜ NPT thread size. Pump handle locks into place to be used as a carrying handle.

Model Number	Pressure Rating PSI (Bar)		Usable Oil Capacity	Oil Volume Per Stroke		Oil Port Thread	Length (mm)
	Stage 1	Stage 2		Stage 1	Stage 2		
HPT035	200 (13.8)	10,000 (700)	350cc	7.0cc	1.0cc	⅜ NPT	310
HPT070	200 (13.8)	10,000 (700)	600cc	13.0cc	2.8cc	⅜ NPT	528
HPT250	200 (13.8)	10,000 (700)	2500cc	13.0cc	2.8cc	⅜ NPT	632

Model Number	Weight each	Order Code KEN-503	Price/1 TB
HPT035	5.30kg	-8900K	8192.00
HPT070	8.00kg	-8940K	9139.00
HPT250	12.0kg	-8960K	12129.00

Spares

Description	Order Code KEN-567	Price/1 TB
Connection Hose (1500mm x ⅜" x ¼" NPT)	-8140K	1803.00
Repair kit for HPT035	-8080K	670.00
Repair kit for HPT070	-8090K	876.00
Repair kit for HPT250	-8100K	927.00

Hydraulic Pull Back Ram

Rugged construction with a heavy-duty return spring. Chrome plated piston inhibits rusting. ¼ NPT thread size. Accessories easily snap on. For use with Porta Power/Body Dozer power units.



Model Number	Capacity (Tonne)	A Stroke (cm)	Cylinder Bore Diameter (mm)	B Overall Length (mm)	Oil Port Thread
HRP005	5	15	34	740	¼ NPT

Model Number	Weight each	Order Code KEN-503	Price/1 TB
HRP005	6.70kg	-7180K	8601.00

Service Kit for Kennedy Hydraulic Pull Ram To suit the Kennedy Hydraulic Pull Ram (KEN-503-7180K) illustrated.

To Suit	Order Code KEN-567	Price/1 TB
KEN-503-7180K	-8010K	464.00



Hydraulic Bench Presses

Ideal for pressing, bending and extruding. The Hydraulic pump can be manually operated or by compressed air connecting the airline supplied to an air supply line or direct to a compressor providing at least 8 - 9.5bar at 4cfm. Hydraulic gauge is included. Ideal for industrial and automotive applications.

20 Tonnes



Sturdy steel frame with end braces and wide feet for extra stability. Work bed height is adjustable in 8 increments of 120mm, allowing large work pieces to be worked on with maximum flexibility.

Capacity: 20 tonnes.

30 Tonnes

Heavy duty steel frame with end braces and wide feet for maximum stability. Work bed height is fully adjustable in 7 increments of 140mm, giving increased flexibility when working with large work pieces.

Capacity: 30 tonnes.

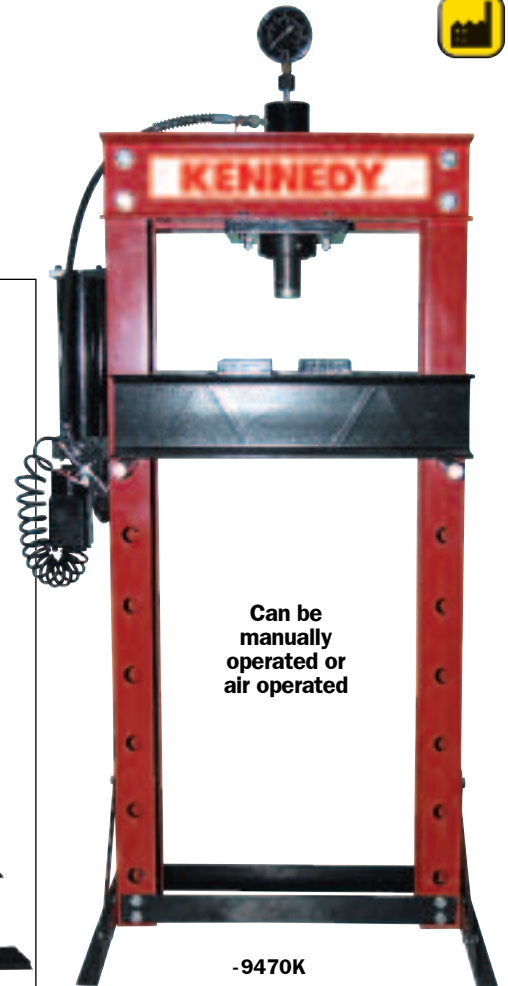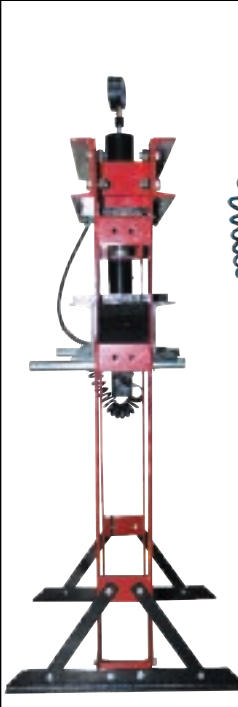

Can be
manually
operated or
air operated

-9470K

Capacity	Work Bed Adjustable Height	Order Code KEN-503	Price/1 TB
20 Tonne	8 Increments of 120mm	-9460K	38625.00
30 Tonne	7 Increments of 140mm	-9470K	59225.00

Seal Repair Kits

Description	Order Code KEN-567	Price/1 TB
For 20T Ram	-8550K	1751.00
For 20T Pump	-8560K	1751.00
For 30T Ram	-8570K	1751.00
For 30T Pump	-8580K	1751.00

Hydraulic Bench Press


Ideal for pressing, bending and extruding. Built for tough daily use in industrial and automotive workshops, manufactured welded steel frame with two end braces for stability and a fully adjustable work bed providing flexibility and convenience. Fitted with a detachable pump and ram allowing hydraulics to be used for other purposes when the press is not being used. Hydraulic gauge is included.

Capacity: 10 tonnes.

These hydraulic presses are ideal for assembly, straightening, fabrication, quality control, maintenance, product testing, bending, forming, punching and shearing.


Model number	HBPO10.
Capacity	10 Tonne.
Ram stroke	150mm.
Extension screw	.60mm.
Max height of ram to table	.300mm.
Min height of ram to table	.90mm.
Table aperture	.140mm.
Working table width	.360mm.
Overall height	.895mm.
Hydraulic gauge included	.Yes.
Weight	.47kg.

1 tonne (metric ton or t)
= 1000kg
1 ton (imperial ton)
= 2240lbs (1016kg)


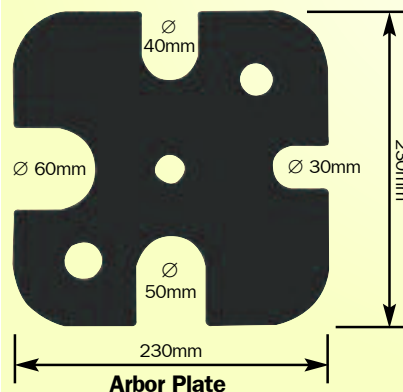


Arbor Plate

Ram Adaptor

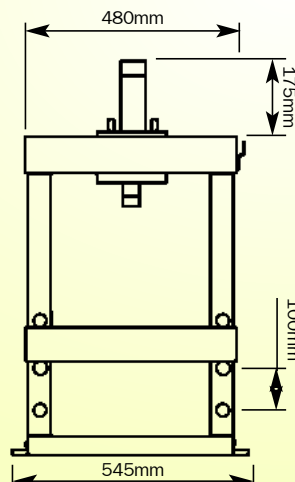

Ram Adaptor

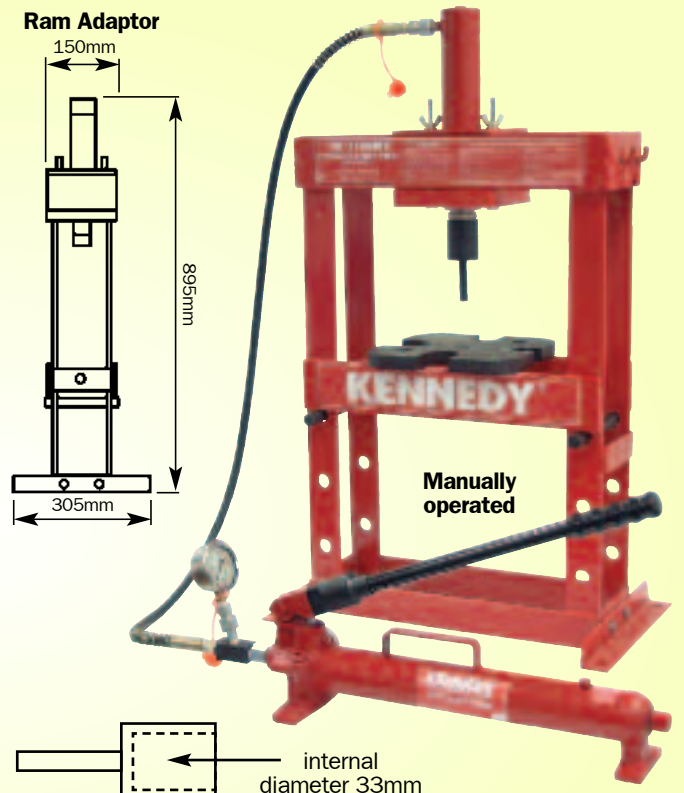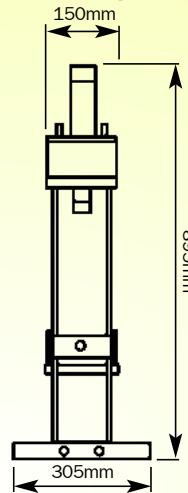

Manually
operated

Spare pump available - (KEN503-8820K), see page TB.

Model Number	Capacity	Overall Height (mm)	Weight each	Order Code KEN-985	Price/1 TB
HBPO10	10 Tonne	895	47kg	-5000K	26812.00
Accessories		Description	Weight each	Order Code KEN-567	Price/1 TB
		Seal Repair Kit	10g	-8220K	464.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY IN EVERY TOOL

Brake Pedal Depressor

Ingenious tool for depressing and holding down the brake pedal whilst carrying out maintenance.

NEW




Description	Order Code KEN-503	Price/1 TB
Brake Pedal Depressor	-1910K	2318.00

Hose Pinch Clamp Set

HPS003

These professional tools are for clamping flexible hoses from 11mm to 60mm in diameter. Made from a composite of glass reinforced nylon, they are lightweight, tough and have smooth rounded jaws to prevent damage to internal reinforcement.

**3
PIECES**

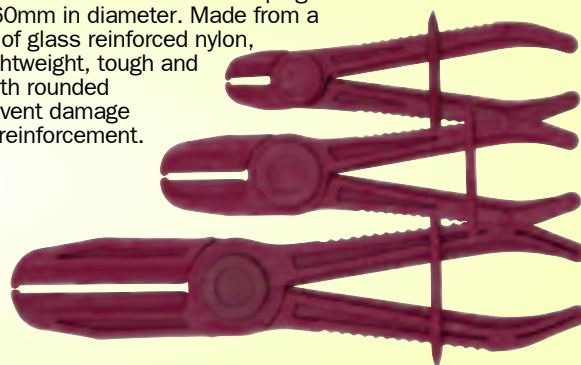

Hose Range	Weight each	Order Code KEN-503	Price/1 TB
11-60mm	330g	-1940K	1442.00

Brake Pin Punches

Parallel pin punches for the removal of brake caliper pad retaining pins. 6.0mm diameter punch uses a pilot tip to aid location in hollow pins used on GM/Vauxhall calipers.

Overall length: 165mm.




Diameter (mm)	Weight each	Order Code KEN-503	Price/1 TB
5.5	95g	-4910K	355.00

Brake Spring Cup Washer Tool

Removes and replaces T-slot anti-rattle spring washers found in drum brake assemblies. Hardened and tempered carbon steel shank and cup with oxidised finish for protection against corrosion, bevelled and notched cup fits 16 - 22mm ($\frac{5}{8}$ " - $\frac{7}{8}$ ") diameter.

Impact resistant square section handle for secure grip even when greasy.

Overall length: 152mm (6").



Product Number	Weight each	Order Code KEN-503	Price/1 TB
BST122	110g	-4940K	304.00

Brake Clip Tool

Designed for import cars with brake shoe hold down clips. Removes and installs brake clip and nail on brake shoes in seconds. Impact resistant square section handle for secure grip even when greasy.

Overall length: 200mm (8").



Product Number	Weight each	Order Code KEN-503	Price/1 TB
BSC150	165g	-4960K	613.00

Brake Fluid Tester (Battery Operated)

This ingenious tool is invaluable in the garage workshop for testing the quality of brake fluid. Testing for moisture content in the fluid by resistance to electric current. You get instant results from the built-in LED indicator light system.

(Runs on 1x 1.5V AAA battery).



Description	Order Code KEN-503	Price/1 TB
Brake Fluid Tester	-1130K	1602.00

Extra Heavy Duty Ear Type Clip Pliers

These pliers have steel jaws, PVC coated handles and a $\frac{1}{2}$ " sq for use with torque wrenches and bar breakers. Suitable for all ear type CVJ boot clips.




NEW

Product Number	Order Code KEN-503	Price/1 TB
AT4185	-4820K	1494.00

Brake Caliper Spreader

Retracting brake caliper pistons can be used with $\frac{1}{2}$ " square drive ratchet and 21mm hex wrench or spanner and is suitable for use on most cars and motorcycles. Constructed from hardened steel with phosphate finished spreader plates for corrosion protection.

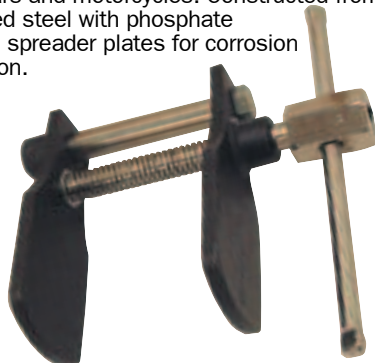

Product Number	Weight each	Order Code KEN-503	Price/1 TB
BCS065	830g	-1900K	1540.00

Brake Pad Key


8mm hexagon key. 140mm handle for optimum leverage and grip. Suitable for disc brake caliper retaining bolts on many modern cars. Manufactured from chrome vanadium steel with corrosion resistant phosphated finish.



Size	Weight each	Order Code KEN-503	Price/1 TB
8mm Hex	245g	-2880K	339.00

Spring Type Hose Pinch Tool


For clamping flexible brake lines, fuel lines, vacuum hose and other fluid lines up to 12mm diameter. Allows servicing to be carried out without the need for system draining. Sliding lock collar allows hoses to be fully or partly closed. Smooth rounded jaw edges avoid damage to hoses. All steel construction with corrosion-resistant chrome finish.

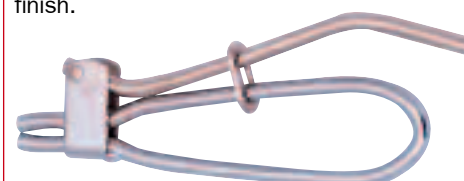

Maximum Diameter	Weight each	Order Code KEN-503	Price/1 TB
12mm	160g	-2840K	438.00

Ratcheting Hose Pinch Pliers

For clamping flexible brake lines, fuel lines, vacuum hose and other fluid lines. Heavy duty serrated jaw edges provide excellent clamping whilst avoiding damage to hoses. Jaws pivot and self-level to ensure parallel clamping. Fine-adjusting ratchet action allows hoses to be fully or partly closed. All steel construction with corrosion-resistant finish.

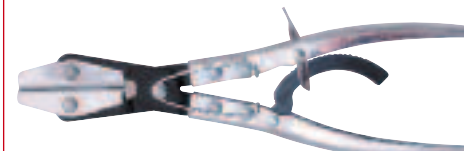

Overall Length	Weight each	Order Code KEN-503	Price/1 TB
200mm	295g	-2850K	909.00
250mm	435g	-2860K	955.00
300mm	565g	-2870K	1170.00



AUTOMOTIVE - BRAKING SYSTEM TOOLS

KENNEDY
QUALITY INDUSTRIAL TOOLING

Pneumatic Brake & Clutch Bleeder

PBB100


Has a 1ltr container with a 1/4" NPT connection, operates from 90 - 145psi (6 - 10bar) air pressure with an air consumption rate of 180ltr/min, an extraction rate of 1.6ltr/min and vacuum (max) of 550mm HG. Handles non-flammable liquids between 0 and 80°C.



Product Number	Capacity (litre)	Weight each	Order Code KEN-503	Price/1 TB
PBB100	1.0	470g	-1920K	2163.00

Remote Hose Clamp Pliers

For the removal and replacement of fuel, oil and water hoses. Flexible 530mm long reach ratchet mechanism allows the pliers to release and lock hose clamps in the opened position. Supplied with cable clamping nipple for use when replacing the cable.

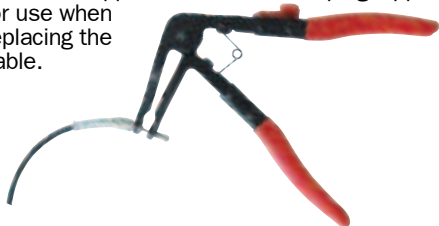

Capacity	Weight each	Order Code KEN-503	Price/1 TB
55mm	575g	-1970K	2833.00

Angled Flat Band Hose Clamp Pliers

Removes and installs flat band hose clamps. Swivel tips to grip at any angle. Locking handle allows user to maintain 'open' position and hold clamp in place.



Overall Length	Weight each	Order Code KEN-503	Price/1 TB
215mm	200g	-1960K	514.00

Heavy Duty Hose Clip Pliers - Clic Compatible

With steel jaws and PVC coated handles. These spring loaded dual purpose pliers are designed for fitting and removing Clic and Clic-R® hose clips.



Overall Length	Weight each	Order Code KEN-503	Price/1 TB
260mm	230g	-4810K	1288.00

Vacuum Testing & Brake Bleeding Kit

Vacuum testing kit that helps to locate and identify faults on cars, motorcycles and commercial vehicles. Supplied in robust blow moulded case.

Contents: serviceable metal bodied vacuum pump, reservoir jar, transfer lid, storage lid, 4x lengths of 6mm ID tubing, 1x length of 4mm ID tubing adaptor. Set of brake bleeding adaptors, rubber cup adaptor.

Maximum vacuum: 550mm Hg.

Reservoir capacity: 150ml.



Description	Order Code KEN-503	Price/1 TB
Vacuum Testing & Brake Bleeding Kit	-2720K	3703.00

Pressure Tester

Cooling System & Radiator Cap Pressure Tester

Designed for the pressure testing of cooling systems and radiator caps up to 35psi (2.5bar). Suitable for use on most makes of car and commercial vehicles, including: Mercedes, Ford, Chrysler, Peugeot, Honda, Lexus, Mazda, Suzuki, Toyota, Nissan, Opel, Volkswagen, Saab, Volvo, Audi, Citroen, Fiat and BMW.

Contents: 14 radiator pressure testing caps, for use in testing cooling systems for leaks. Two cap adaptors, sizes 2 - 3 and 4 - 5, for testing radiator cap release pressure and seal condition. Two 200psi coolant hoses (5/16" and 3/8"), for use with T-adaptor for in-line pressure testing. T-adaptor for creating in-line pressure testing set-up. Two 3/4" hose clips.

Description	Order Code KEN-503	Price/1 TB
Cooling System & Radiator Pressure Tester	-0960K	24875.00




BEST SELLER

Universal Caliper Wind-Back Tool Kits

Winds back disc brake calipers when replacing brake pads. Professional quality, allows the easy return of brake piston into the caliper. Suitable for most braking systems.



Number of Pieces	Order Code KEN-503	Price/1 TB
12	-2770K	2755.00
18	-1890K	6644.00

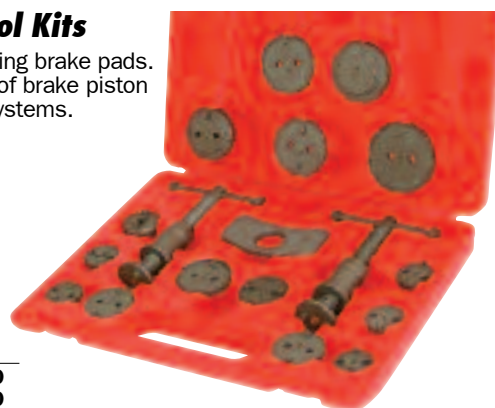

Compression Tester

Suitable for all types of spark plugs. Finds faults in piston rings, valves, head gaskets and cylinder bores. Suitable for use on most petrol engine vehicles and motorcycles. Can be used on crankshaft seals in two-stroke engines. 195mm flexible hose. For use on 14mm and 18mm threads. Large easy to read scale 0 - 21bar/ 0 - 300psi. Air release valve to allow rapid re-testing.



BEST SELLER

Description	Weight each	Order Code KEN-503	Price/1 TB
Petrol engine Compression Tester	440g	-1160K	1849.00

Vacuum & Fuel Pump Tester

Suitable for use on most engines. Large, easy to read dual calibrated colour coded scale. Suitable for all types of spark plugs. Can be used on crankshaft seals in two-stroke engines. Suitable for testing and finding fault in petrol engines with spark misfires, poor engine compression, weak/rich mixture, ignition over advanced/retarded, inlet manifold and carburettor air leaks, incorrect valve timing and poor fuel economy. Can be used for carburettor balancing, checking turbo boost pressure up to 0.7bar and fuel pump.



Description	Weight each	Order Code KEN-503	Price/1 TB
Vacuum Tester	440g	-1140K	876.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY INSURANCE TOOLING

Valve Spring Compressor

Fully adjustable valve spring compressor for use on large and diesel engines. A unique 'direct action' compressor lever gives improved visibility and ease of use in areas of difficult access. Manufactured from heavy duty steel with all rivetted joints and a slip resistant rubber handle.

Restricted access adaptors: 25, 30mm.

Jaw opening: min. 35mm, max. 200mm.

Throat clearance: 250mm.




**35 - 200mm
Capacity**

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 TB
35 - 200mm	2.50kg	-2700K	2549.00

Valve & Piston Ring Compressors

Designed for use on production lines as well as in the automotive workshop. Able to cope with occasional commercial use. Manufactured from bright nickel plated steel with PVC cushion grips.

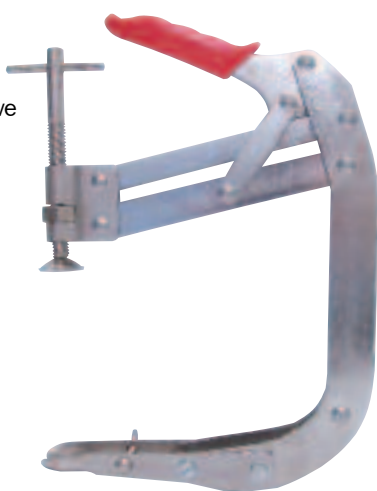

Opening Capacity	Weight each	Order Code KEN-503	Price/1 TB
75 - 230mm	1.30kg	-2010K	1700.00

Piston Ring Compressors

The compressor gently compresses the piston rings into position reducing the risk of damage to components during installation. Key operated with ratchet mechanism and safety valve for combining safe rapid compression with positive control. Made from tempered spring steel complete with steel key.

PRC-540 - Passenger car vehicle engines.

Capacity: 57 - 125mm (2¼" - 5").

Height: 80mm (3¼").

PRC-730 - Car/light commercial vehicle engines.


Capacity: 90 - 175mm (3½" - 7").

Height: 100mm (4").

PRC-765 - Heavy commercial vehicle engines.

Capacity: 90 - 175mm (3½" - 7").

Height: 165mm (6½").

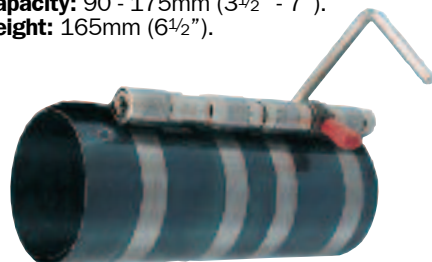

Model Number	Weight each	Order Code KEN-503	Price/1 TB
PRC540	260g	-2210K	747.00
PRC730	300g	-2240K	922.00
PRC765	560g	-2270K	1643.00

Valve Spring Compressor

Fully adjustable valve spring compressor for use on multi-valve petrol and diesel engines with deep seated valves.

Universal model with unique dual-cam action, parallel lift and automatic locking reversible jaw/ adaptor, suitable for general use on a wide range of OHC, OHV and CVH engines. A unique 'direct action' compressor lever gives improved visibility and ease of use in areas of difficult access. Manufactured from heavy-duty steel with all rivetted joints and a slip resistant rubber handles.

Restricted access adaptors:

25, 30mm.

Jaw opening: min. 55mm, max. 175mm.

Throat clearance: 165mm.

Packaging dimensions (W x H x D):

430 x 205 x 40mm.




**55 - 175mm
Capacity**

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 TB
55 - 175mm	2.20kg	-2710K	2982.00

Piston Ring Pliers

To enable fast installation or removal of piston rings. A self-adjusting spring tensioned mechanism manufactured from nickel-plated steel with PVC handles for extra grip.

Capacity: 50 - 100mm (2" - 4").

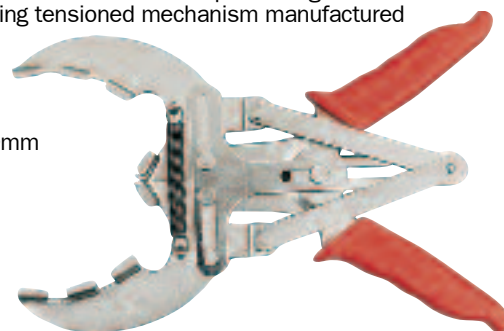

Capacity (mm)	Weight each	Order Code KEN-503	Price/1 TB
50 - 100	250g	-2090K	979.00

Straight Head Valve Seal Ring Pliers

Standard Length

For the easy removal of most valve stem seals and lower valve spring guides in restricted areas above the cylinder head.


Overall length: 250mm, 50mm reach.



Extra Long

For the easy removal of most valve stem seals in multi-valve engines in restricted areas above the cylinder head. Gripping serrations inside the jaws aid gripping the outside diameter of the valve stem seal. Steel pliers with double rivetted metal handles.

Overall length: 270mm, 80mm reach.

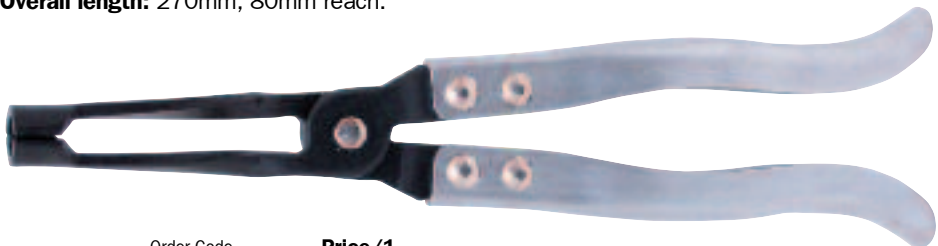

Type	Order Code KEN-503	Price/1 TB
Standard	-2680K	670.00
Extra Long	-2690K	922.00



Cylinder Hone

For honing of brake cylinders and piston bores with capacities between 19 - 68mm. Self aligning flexible shaft and leg assembly for smooth operation at all speeds. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all 3 jaw chucks. Supplied complete with a medium grade stone set. For storage purposes legs are retained in position by a triangular clip. This can be removed using long nose pliers or tweezers and should be retained for further use. Replacement stone sets available.

Use brake fluid for cutting lubricant.

Overall length: 200mm.



Heavy Duty Cylinder Hone

For honing of brake cylinders and piston bores with capacities between 51 - 178mm. Self-aligning flexible shaft and leg assembly for smooth operation at all speeds. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all three jaw chucks. Supplied complete with a fine grade stone set. For storage purposes legs are retained in position by a triangular clip. This can be removed using long nose pliers or tweezers and should be retained for further use. Replacement stone sets available.

Use brake fluid for cutting lubricant.

Overall length: 290mm.



Type	Weight each	Order Code KEN-503	Price/1 TB
3 Leg	380g	-2920K	1906.00
Replacement Stones - 100 x 9mm - 3 Piece			
Fine	88g	-2950K	798.00
Medium	93g	-2960K	809.00
Coarse	97g	-2970K	798.00

Type	Weight each	Order Code KEN-503	Price/1 TB
3 Leg	105g	-2940K	695.00
Replacement Stones - 29 x 4.5mm			
Medium	83g	-2980K	361.00

Cylinder Hone Set

Four different honing tools in one set suitable for honing/deglazing car brake and clutch cylinders, motorcycle, lawnmower, outboard motor engine cylinders, small bore car engine cylinders with capacities between 18 - 89mm. Self-aligning flexible shaft and leg assembly for smooth operation at all speeds and easy alignment. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all three jaw chucks. Supplied in a plastic blow-moulded case.

Overall length: 200mm.

Set Contents:

Main honing body,
twin leg set - 50mm,
triple leg set - 50mm,
triple leg set - 60mm;
three sets of medium stones:
19 x 4.5mm (x3 off),
29 x 4.5mm (x5 off) and
51 x 7.0mm (x3 off).

Twin Leg 18 - 64mm

For small brake cylinders.
50mm twin leg set
and 2x 29mm stones.
(NB Ready assembled in kit)

Triple Leg 19 - 68mm

For large brake/clutch cylinders. Use medium collar, 50mm triple leg set and 3x 29mm stones.

Triple Leg 32 - 89mm

For disc brake cylinders. Use large spring, 60mm triple leg set and 3x 19mm stones.

Triple Leg 32 - 89mm

For small engine cylinders. Use large spring, 60mm triple leg set and 3x 51mm stones.



Replacement Stone Sets Medium- 3 Piece

L x W (mm)	Weight each	Order Code KEN-503	Price/1 TB
19 x 4.5	83g	-2990K	283.00
29 x 4.5	89g	-2980K	361.00
51 x 7.0	99g	-3000K	335.00


Type	Weight each	Order Code KEN-503	Price/1 TB
4-in-1	248g	-2930K	1148.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

**KENNEDY
PROFESSIONAL**

2-in-1 Padded Creeper Board & Seat

Heavy duty steel frame with powder coat finish. Vinyl coated cushioning. Quickly converts from creeper to seat. Adjustable back and parts tray when in the seat position.

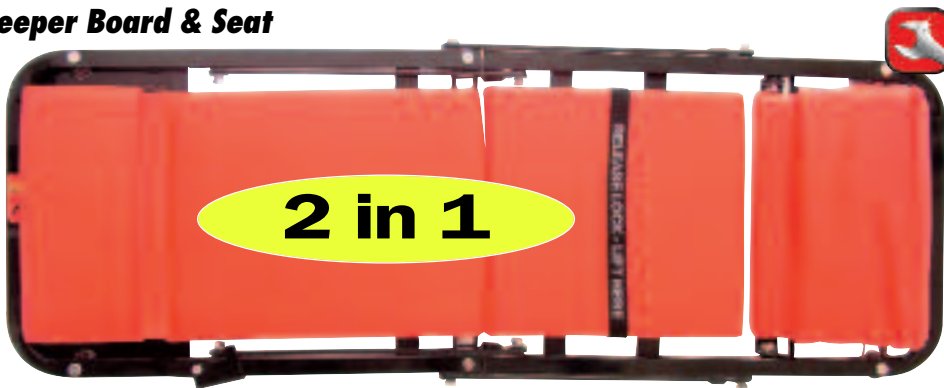

Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 TB
1050 x 480 x 100	13.0kg	-7300K	4428.00

Padded Creeper Board

Both the creeper board and seat framework are manufactured from heavy steel with a powder paint finish. Furnished with a vinyl covered cushioning and are fitted with castor wheels for ease of movement.



Padded Creeper Seat

The creeper seat is fitted with a parts tray for tools and components.

Type	Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 TB
Board	1050 x 480 x 100	7.00kg	-7320K	2446.00
Seat	365 x 355 x 355	3.50kg	-7340K	1437.00

Creeper Board with Magnetic Trays

KMC01

High-impact moulded plastic creeper board lets you work under vehicles with ease. Low profile design to provide greater clearance. Padded headrest with removable magnetic tool trays and 6x 75mm PVC coated caster wheels.

Capacity: 113kg (250lbs).

Dimensions (L x W x H):

1020 x 475 x 120mm.

Weight: 5kg.



NEW

Type	Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 TB
Board	1020 x 475 x 120	5.00kg	-7420K	3039.00

**SENATOR
QUALITY TOOLING**

Lightweight Plastic Creeper Board

Durable, lightweight moulded plastic creeper board ideal for use in garages. Padded headrest with 4x 50mm polypropylene caster wheels.

Capacity: 127kg (280lbs).

Dimensions (L x W x H):

910 x 405 x 105mm.

Weight: 3kg.



NEW



Type	Size L x W x H (mm)	Weight each	Order Code SEN-503	Price/1 TB
Board	910 x 405 x 105	3.00kg	-7378K	1545.00

KENNEDY
QUALITY INDUSTRIAL TOOLING

30+ 7 LED Rechargeable Worklight - 230V

37 super bright LEDs. Dual use as an inspection lamp or directional torch. Moisture protection IP44. Two magnets and two 360° swivel hanging hooks for hands free applications. Lower quarter of lamp rotates 180° to use as a stand. Supplied with AC/DC mains charger and 12V DC in-car charger for portable charging. 7.2V (800mAh) Lithium-Ion battery. Main light lasts up to four hours, and directional light lasts up to 20hrs, when fully charged.



NEW

Voltage	Weight each	Order Code	Price/1 TB
230V	260g	KEN-503 -5100K	2575.00

24 LED Worklight

LWL024

24 super bright LEDs. Magnetic base. Soft touch durable composite casing. 360° swivel hanging hook for hands free applications. 3x AA batteries not supplied. Lasts for 4 - 5 hours approx. IP20 moisture protection.

Length: 208mm.



NEW

Type	Weight each	Order Code	Price/1 TB
3x AA Batteries	260g	KEN-503 -5110K	361.00



Lead Lamp Wire Cage

Designed for the professional, with heavy duty rubberised handle, wire protection cage with integral hook and 4.8m of cable. Accepts screw-in (ES) type bulb (supplied separately).



4.8m CABLE

Voltage	Weight each	Order Code	Price/1 TB
240V	995g	KEN-503 -5380K	720.00

LED Inspection Lamps with Swivel Clamp

The high light output and durable construction make them ideal for use in engine bays and other low light work areas. The ball-jointed swivel clamp gives maximum positioning versatility. Convenient grip mounted ON/OFF switch. Oil, petrol and UV resistant.

Rechargeable

Lasts up to 4 hours when fully charged.

12V

4.8m power cable allows use in remote areas.



Type	Order Code	Price/1 TB
Rechargeable	KEN-503 -5030K	3888.00
12V	-5050K	2524.00

LED Inspection Lamps

Durable and robust construction with a rubber handle and end cup, plus a sturdy swivel hanging hook making it ideal for use in engine bays and other low light work areas. Anti-roll hexagonal shape with a convenient grip mounted ON/OFF switch. Main light and spot light option.

Rechargeable

Main light lasts up to 3.5hrs when fully charged using the charger supplied.



Mains Powered
High light output with low power consumption.

Type	Order Code	Price/1 TB
Rechargeable	KEN-503 -5080K	3785.00
Mains Lamp	-5090K	3501.00

SENATOR
QUALITY TOOLING

Lead Lamp Plastic Cage

Plastic protection cage with integral hook and 4.8m of cable. Accepts screw-in (ES) type bulb (supplied separately).



4.8m CABLE

Voltage	Weight each	Order Code	Price/1 TB
240V	720g	SEN-503 -5370K	500.00

Mechanic's Stethoscope

Professional stethoscope provides a fast and easy way to locate noises in engines or bearings and other moving parts. High quality surgical grade PVC and rubber parts for increased sound definition, plastic ear-pieces minimise outside noise with an aluminium alloy probe/needle for finding the exact location of specific noises. Supplied with rubber trumpet for checking vacuum and pressure flow. Useful for synchronising multi carburettors, helps to track dashboard rattles and is ideal for pinpointing unusual vibrations or suspected leaks, it is also shockproof.



Product Number	Order Code	Price/1 TB
MSC110	KEN-503 -2740K	798.00

EDISON Rechargeable Lamp

Ideal for use in automotive workshops and the construction industry. Heavy-duty rubber and polycarbonate case. Lasts up to 6hrs when fully charged. Adjustable brightness. Durable, robust and reliable. Foldaway swivel hanging hook, wall or bench mount charging base with 1.9m power cable*. 30 LEDs provide a constant high light output. Water and oil-resistant to IP68. Powered by high capacity Lithium-Ion polymer batteries. Optional flashing mode. Sealed switch. Can be stood upright. Uses induction charging technology. Battery low warning. *Screws and wall plugs for mounting the charging unit to a wall are not included.

Rated to IP68



Type	Order Code	Price/1 TB
Rechargeable Lamp	EDI-904 -1100K	4820.00

KENNEDY Bottle Jacks

With large cast iron bases with a steel cylinder housing and an adjusting notched saddle. Fitted with an overload protection valve. Two piece 'pumping' handle also operates hydraulic release.

Use on a firm level surface. **DO NOT** work under the vehicle until another means of support, such as axle stands, are used. Models B234, B337 and B541 are supplied in a robust blow moulded carry case. **Complies with the EC Machinery Directive. GS and TUV approved.**

(Load ratings are 'metric tonnes' i.e. 1 tonne = 1,000kg).

All supplied with spare seals.

2, 3 and 5 tonne jacks supplied in a robust plastic case



Model Number	Max Load (Tonne)	Height (mm) Min. - Max.	Max Saddle Adjustment	Weight each	Order Code KEN-503	Price/1 TB
B234	2	181 - 345	48mm	3.00kg	-5820K	1148.00
B337	3	194 - 372	60mm	3.75kg	-5840K	1338.00
B541	5	216 - 416	70mm	4.90kg	-5860K	1334.00
B845	8	230 - 457	80mm	5.75kg	-5690K	1571.00
B1246	12	230 - 465	80mm	7.50kg	-5710K	2318.00
B1546	15	230 - 460	80mm	8.50kg	-5730K	2421.00
B2045	20	242 - 452	60mm	11.0kg	-5750K	2627.00

2 Tonne Low Profile Service Trolley Jack

Low Profile Trolley Jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors and swivel castors ensure easy positioning under the vehicle prior to lifting. The pump handle with comfort rubber grip is to rapidly raise and lower the load arm and the vehicle. For use on a firm level surfaces.

DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 TB
T5359	2000kg	89 - 359	14.5kg	-6520K	4635.00

2.5 Tonne Low Profile Trolley Jack

Low Profile Trolley Jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors and swivel castors ensure easy positioning under the vehicle prior to lifting. The pump handle with comfort rubber grip is to rapidly raise and lower the load arm and the vehicle. For use on a firm level surfaces.

DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 TB
T450L	2500kg	85 - 450	36kg	-6530K	10815.00

Heavy Duty Bottle Jacks

With machined/cast steel bases and cylinder housings. Fitted with an overload protection valve. Three piece 'pumping' handle also operates hydraulic release. Use on a firm level surface. **DO NOT** work under the vehicle until another means of support, such as axle stands, are used.



Model Number	Max Load (Tonne)	Height (mm) Min. - Max.	Max Saddle Adjustment	Weight each	Order Code KEN-503	Price/1 TB
B3047	30	285 - 475	-	23.0kg	-5770K	5355.00
B5048	50	300 - 480	80mm	34.0kg	-5790K	10815.00

2 Tonne Low Profile Long Reach Trolley Jack

Low profile long reach trolley jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors, swivel castors and inside wheel ensure excellent manoeuvrability and easy positioning under the vehicle prior to lifting. The foot pedal is to rapidly raise and lower the load arm and the vehicle. The long reach pump handle has a comfort rubber grip. Includes a practical tray for carrying tools and a rubber pad for the saddle. For use on a firm level surfaces.



DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.

Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 TB
T510L	2000kg	76 - 510	42kg	-6570K	16995.00
T525L	3000kg	140 - 525	50kg	-6580K	19055.00

Air Trolley Jack - 20/40T 2 Stage

For use when lifting heavy vehicles such as lorries etc. This industrial air jack has a robust steel chassis, 'T' bar handle with integral air control valve and two extensions for increased lifting height. It requires an air pressure of 116 - 174psi (8 - 12bar) and a supply rate of 105ltr/min (3.7cfm).



JTA2040

Air supply: 116 - 174psi (8 - 12bar).

Air consumption: 105ltr/min (3.7cfm).

Lifting capacity: 20T/40T.

Base height: 210mm.

Lifting height:

40T - 433mm,

20T - 520mm.

Air inlet size: 1/4"NTP.

Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 TB
JTA2040	40T	210 - 520	74kg	-7120K	46350.00

KENNEDY Trolley Jack

Strong steel chassis provides stability when under load. Fixed direction castors and swivel castors for easier positioning under vehicles. Long reach single piece pump handle with comfort rubber for rapid raising and lower. Safety overload protection valve prevents overload damage to hydraulic mechanism. Integral carry handle. **GS and TUV approved.**

T238

Type: with case.

Dimensions: 525 x 225 x 145mm.

Maximum load: 2,000kg.

Minimum height: 130mm.

Maximum height: 380mm.

T2.249

Type: with case.

Dimensions: 695 x 344 x 180mm.

Maximum load: 2,250kg.

Minimum height: 145mm.

Maximum height: 495mm.

T280

Type: long reach.

Dimensions: 1150 x 360 x 210mm.

Maximum load: 2,000kg.

Minimum height: 140mm.

Maximum height: 800mm.



Group 270



T280 Model




Model Number	Capacity	Weight each	Order Code KEN-503	Price/1 TB
T238	2 Tonne	12.0kg	-6320K	3863.00
T2.249	2¼ Tonne	36.5kg	-6350K	6710.00
T280	2 Tonne	58.0kg	-6920K	18025.00

Spares

Description	Weight each	Order Code KEN-567	Price/1 TB
Torsion Spring for T280	49g	-7880K	155.00
Torsion Spring for T2.249	49g	-7860K	180.00
Seal Repair Kit for T238	7g	-8160K	155.00
Seal Repair Kit for T2.249	4g	-8180K	232.00

3 Tonne Quick Lift Trolley Jack

3 tonne capacity. One stroke instant lift foot pedal, raises the saddle up to jack point to increase productivity. Constructed from heavy gauge steel. 1m, two-piece handle. 120mm diameter saddle. Automatic safety overload protection. Positive twist, lock and release mechanism. Heavy duty rear swivelling castor wheels.

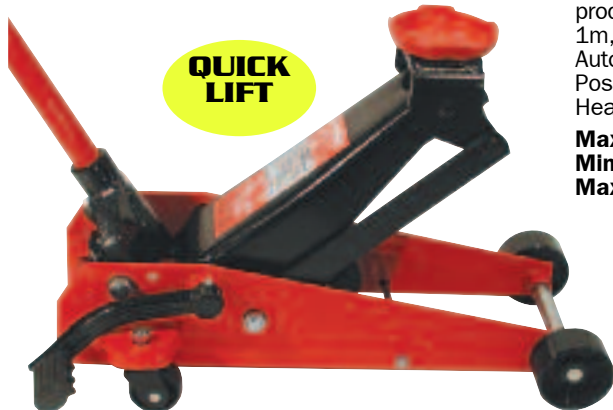

QUICK LIFT

Maximum load: 3000kg.
Minimum height: 145mm.
Maximum height: 490mm.



Capacity	Weight each	Order Code KEN-503	Price/1 TB
3 Tonne	39.5kg	-7100K	11897.00

Ratcheting Axle Stands


Suitable for supporting raised vehicles or equipment. Protective red enamel coating. 10-position ratchet design that automatically locks when raised.



Capacity/pair	Per Stand	Min. - Max. Height	Order Code KEN-503	Price/Pr TB
4 Tonne (4000kg)	2T	265-418mm	-5520K	1519.00
6 Tonne (6000kg)	3T	280-420mm	-5530K	2415.00
12 Tonne (12000kg)	6T	390-608mm	-5560K	3863.00

Scissor Jack

Made from heavy-duty steel with a rubber saddle which provides a positive grip and prevents damage to jacking points. Designed to safely raise vehicles. Easy to use and compact for easy storage. 1 Tonne (1000kg) safe working load. Wide base plate for extra stability.

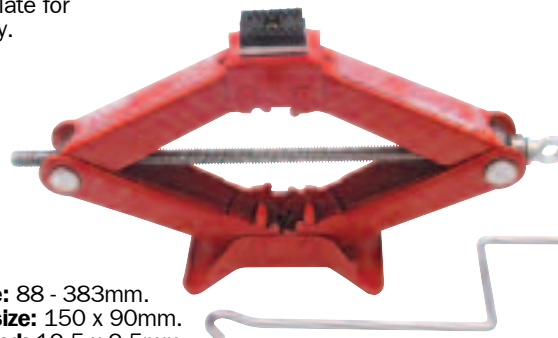

Lifting range: 88 - 383mm.
Base plate size: 150 x 90mm.
Spindle thread: 12.5 x 2.5mm.

Model Number	Capacity	Weight each	Order Code KEN-503	Price/1 TB
KSJ010	1 Tonne	2.80kg	-5920K	1107.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR