### GROUP 525 HAMMERS **Carpenter's Claw Hammers**



### **Fibreglass Shaft**

With textured slip resistant rubber grip. Shaft and grip combine to dampen the impact transmitted through to the user's hand and wrist. Reduces operator fatigue and the risk of RSI (Repetitive Strain



Injury). The high strength of the shaft and head bond make the hammer virtually unbreakable.

	Order Code Price/1 KEN-525 TB
-4	-4460K 634.00
-4	-4480K 691.00

### **Hardwood Shaft**

With fine grain, forged steel head, hardened and tempered with polished face.



### **Hickory Shaft**

TOOLS

HAND

With fine grain, forged steel head, hardened and tempered with polished face.



### **Tubular Steel Shaft**

With textured slip resistant rubber grip. Dampens the impact transmitted through to the user's hand and wrist.

20oz



-4400K

711.00

Industrial **IATOR Claw Hammers** 

### Fibreglass Shaft

Used for general purpose carpentry, particularly for driving and removing nails. With drop forged steel head and hardened and tempered face. Textured rubber grip handle.



### Wood Shaft

Used for general purpose carpentry, particularly for driving and removing nails. With drop forged steel head and hardened and tempered faces.



### Solid Steel Shaft

High strength all steel construction with slip resistant and shock absorbing textured rubber grip for improved user comfort and control.



Size	(mm)	per 6	<b>KEN-525</b>	TB
16oz	315	5.00kg	-4420K	1148.00
20oz	315	8.30kg	-4430K	1413.00

## **Machinist's Hammers**

Machinists hammers suitable for use on metal. Manufactured to European DIN 1041 standard.



Head Size	Length (mm)	Weight each	Order Code KEN-525	Price/1 TB
0.5kg	320	583g	-7420K	626.00
0.8kg	350	984g	-7440K	640.00
1.0kg	360	1227g	-7460K	894.00
1.5kg	380	1850g	-7470K	1012.00
2.0kg	400	2400g	-7480K	1131.00





Price/1 TB

682.00

# KENNEDY Brick Hammers

For setting, dressing and splitting bricks, tiles, concrete blocks, chipping mortar etc.



# KENNEDY Ball Pein Hammers


### Fibreglass Shaft

With textured slip resistant rubber grip. Shaft and grip combine to dampen the impact transmitted through to the user's hand and wrist. Reduces operator fatigue and the risk of RSI (Repetitive Strain Injury).

		2			
(The second seco	Head Size	Length (mm)	Weight per 6	Order Code KEN-525	Price/1 TB
	1/2lb	275	3.20kg	-3400K	439.00
	<sup>3/4</sup> lb	275	3.20kg	-3430K	484.00
	1lb	350	3.80kg	-3450K	598.00
	11/2lb	400	6.00kg	-3470K	756.00
	2lb	400	7.20kg	-3500K	832.00

### Hickory Shaft

With fine grain, forged steel head, hardened and tempered with polished faces.

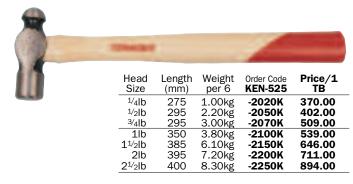

# SENATOR QUALITY TOOLING Hammers

### Hickory Shaft

Manufactured from finest quality drop forged steel, hardened and tempered with ground and polished faces.

ð.	ERMARS	8	-	=/		
		Head Size	Length (mm)	Weight per 6	Order Code SEN-525	Price/1 TB
		1⁄2lb	300	2.05kg	-2050K	336.00
		1lb	350	3.55kg	-2100K	437.00
		1 <sup>1/</sup> 2lb	400	6.00kg	-2150K	530.00
		2lb	400	6.75kg	-2200K	555.00

# **Engineer's Ball Pein Hammers**

Length

(mm)

290

**Standard Pattern Tubular Steel Shaft** 

transmitted through to

the user's hand and wrist.

Head

Size

20oz

With textured slip resistant rubber grip. Dampens the impact

Ball pein hammers are manufactured from high-grade drop forged steel fully heat-treated. Ideal for use with cold chisels, punches, rivets and for the shaping of metal. They are available with a hardwood, hickory, fibreglass or tubular steel shaft.

Weight per 6

6.40kg

Order Code

**KEN-525** 

-7070K

### Hardwood Shaft


With fine grain, forged steel head, hardened and tempered with polished faces.



# Pin Ball Pein Hammer

### **Hickory Shaft**

With fine grain, forged steel head, hardened and tempered with polished faces. For light applications.

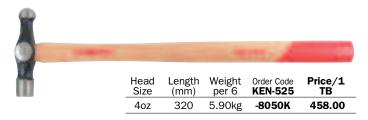

# **Engineer's Ball Pein Hammers**

### Tubular Steel Shaft

With textured slip resistant rubber grip. Dampens the impact transmitted through to the user's hand and wrist.



Page 415

# **525** HAMMERS KENNED Cross Pein Hammers

Cross pein hammers are traditionally used by joiners and fitters. Cross pein can be used for setting pins and nails prior to 'driving home' with the flat faced pein.

### **Hickory Shaft**

Hardened and ground forged steel head with polished striking face securely fixed to a close grain hickory shaft. Shaped to fit comfortably in the hand. Tapered head, suitable for use with small pins helps reduce over-strike.



### 'Pin' Hardwood Shaft

Hardened and ground forged steel head with polished striking face securely fixed to a close grain hardwood shaft. Shaped to fit comfortably in the hand. Tapered head, suitable for use with small pins helps reduce over-strike.

-	ADD-DVY			
Head Size	Length (mm)	Weight per 12	Order Code KEN-525	Price/1 TB
31/20Z	325	3.20kg	-8040K	408.00

### Warrington Hardwood Shaft

Close grained hardwood shaft shaped to comfortably fit in the hand. Forged steel head with ground and polished striking face.



Head Size (oz/Number)	Length (mm)	Weight per 6	Order Code KEN-525	Price/1 TB
8/0	280	1.30g	-8080K	441.00
10/1	290	2.50g	-8100K	408.00
12/2	300	3.00g	-8120K	449.00
14/3	325	3.50g	-8140K	420.00
16/4	330	4.10g	-8160K	746.00

# **Magnetic Tack Hammers**

Hickory Shaft

Page 416

For holding and driving tacks.



# Welder's Chipping Hammers

Scaling and chipping hammers. For boiler scaling, weld dressing etc.

### **Hardwood Shaft**

Manufactured from tempered and hardened steel, chisel and point striking faces with close grain hardwood handle.



### **Spring Steel Shaft**

Hardened and tempered steel head chisel edge and point striking faces with epoxy coating. Spring steel impact absorbing handle for user comfort.




# Scutch Hammer

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

### **Hickory Shaft**

Double bit type. Suitable for dressing brick and stone work prior to rendering. Replaceable plain and comb style bits. With fine grain, forged steel head, hardened and tempered with polished faces.

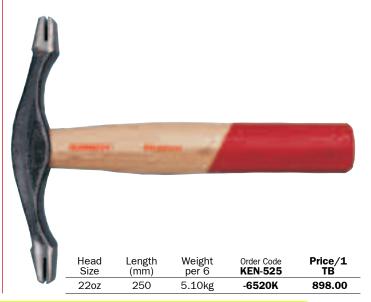






# KENNEDY Club Hammers

Club (or lump) hammers are fully forged and heat treated with flat face and chamfered edge for use with cold chisels, brick bolsters, star drills and masonry nails.

### **Fibreglass Shaft**

With textured slip resistant rubber grip. Shaft and grip combine to dampen the impact transmitted through to the user's hand and wrist. Reduces operator fatigue and the risk of repetitive strain injury (RSI).



# **Sledge Hammers**

Double faced sledge hammers are fully forged and heat-treated. Ideal for use on spikes, stakes, cold chisels and hardened nails. They are available with a hickory or fibreglass shaft.

# **Hickory Shaft**

With fine grain, forged steel head, hardened and tempered with polished faces.



-5840K



### Fibreglass Shaft

(BS 876 Sledge Hammers)

Dampens the impact transmitted to the user's hand and wrist. Tested to the requirements of **BS 876: 1981** (head stamped **BS 876**).

### **Hickory Shaft**

With fine grain, forged steel head, hardened and tempered with polished faces.



One piece solid steel shaft with rubber grip. Supplied with protective head cover. **Overall length:** 345mm.

# Head Size (oz/g) Weight per 6 Order Code KEN-525 Price/1 TB 20/566 6.20kg -9090K 1716.00

# **Chopping Axe**

Heat treated tubular steel shaft with rubber grip. Drop forged polished and lacquered head. Supplied with protective head cover. Belt slits in head cover offer hands free storage whilst in transit.

Overall length: 335mm.



	Size	(mm)	each	KEN-525	TB		
	Fib	reglass	Shaft (B	S 876 Sledg	ge Hammers)		
	4lb	350	2.20kg	-5840K	2735.00		
	7lb	900	3.80kg	-6180K	3194.00		
	10lb	910	5.30kg	-6190K	3753.00		
	14lb	910	7.40kg	-6200K	4009.00		
Hickory Shaft							
	4lb	350	2.10kg	-5940K	1550.00		
	7lb	900	3.80kg	-6070K	2120.00		
	10lb	900	5.40kg	-6100K	2700.00		
	14lb	900	7.30kg	-6140K	2966.00		

## **Riggers Hatchet**

One piece solid steel shaft with rubber grip. With a sharp cutting edge and chequered face. **Overall length:** 430mm.



Page 417

# Felling Axe

Suitable for felling small trees, chopping off branches and splitting logs. High quality tool steel blade, polished and lacquered. Finely sanded hickory handle, shaped for maximum user comfort. Part painted head and handle for durability.

The second se		1		900mm r	hickory snaπ. 2 <sup>4</sup> 2° x <sup>3</sup> 4° eye.
	Head Size (lb)	Length (mm)	Weight per 6	Order Code KEN-525	Price/1 TB
	41/2	900	23.0kg	-9130K	2079.00


### GROUP 525 HAMMERS Bumpina Hammers

Highly polished striking heads and cheeks. One square and one round face. The most popular general purpose panel beating hammer. Hickory shaft. Manufactured to BS 4114.

### Flat Faced

For straightening thicker gauge metals where a reasonable striking force is needed.


Length: 325mm.

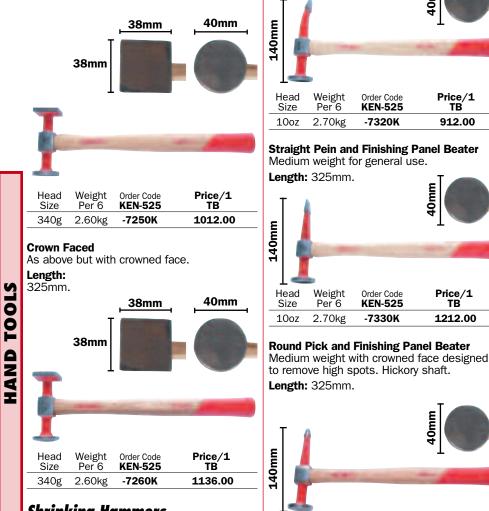

# Shrinking Hammers

Highly polished striking heads and cheeks. One flat round face and one milled, serrated square face. Hickory shaft. Manufactured to BS 4114. Specially designed for panel beating on slightly stretched areas of metal. The cross milled face forces small amounts of metal into the spaces created.

Sizes: 325mm (except -7300K = 345mm).

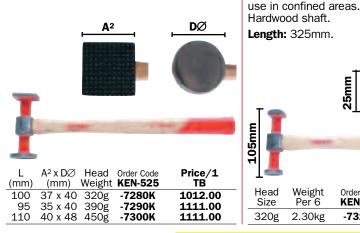

# **Finishing Picks**

Highly polished striking heads and cheeks. With crowned faces. Will remove low spots when metal finishing. Hardwood shaft and finishing beater. Manufactured to BS 4114. **Curved Pein Panel Beater** 

Medium weight for general use where access is difficult.

Order Code

**KEN-525** 

-7320K

Order Code

**KEN-525** 

-7330K

Order Code

**KEN-525** 

-7340K

**Reverse Curve Finishing Hammer** 

The high crowned radius faces have a convex

recessed panels. The short head is ideal for

Order Code

**KEN-525** 

-7310K

25mm

Highly polished striking heads and cheeks.

surface suitable for work on concave and

Length: 325mm.

Weight

Per 6

2.70kg

Weight

Per<sup>6</sup>

2.70kg

Weight

Per 6

2.40kg

Head

Size

9oz

Head

Size

320g

Weight

Per 6

2.30kg

Head

Size

10oz

Head

Size

10oz



Price/1

TB

912.00

Price/1 TB

1212.00

Price/1 ΤB

867.00

Plastic THOR HAMMER Mallets

Ultra high molecular weight polythene mallet heads, suitable for high impact applications. With solid wooden shafts.

### **Tinmens - Cylindrical**



	23-8126	80	950g	-0375L	1648.00
-		Bo	ssing - Pe	ear Shaped	
	23-8898SP	50	200g	-03785	1029.00
	23-8899SP	60	290g	-0379V	1236.00
	23-8900SP	70	420g	-0380B	1648.00



more acute curve. Designed for flashing work.



Length (mm)			TB
330 (13")	295g	-2400K	1131.00

### **Bossing Mallets**

Delivers the necessary blow to shape sheet metal and still made to the exacting standards.

28mm Weight Order Code Price/1 Head Dia. (mm) each **KEN-549** TΒ Price/1 TB 130g 1082.00 40 (11/2") -2500K 50 370g -2520K 1107.00 912.00 75 Ì3 452g -2560K 1288.00

Page 418

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR** © 2014

GROUP 525 HAMMERS

IOR HAMMEB Mallets Standard: All purpose mallet used widely for automotive, industrial, DIY and camping etc.

Rubber


N	E	V	Y	
		-		

Product Code	Face (mm)	Length (mm)	Weight each	Order Code THO-527	Price/1 TB	
61-951	40	265	150g	-0430N	283.00	
61-952	54	315	325g	-0431P	361.00	
61-953	64	340	525g	-0432Q	489.00	
61-954	74	380	600g	-0433R	644.00	
61-957	90	380	900g	-0434S	823.00	


White: Will not leave marks on work surfaces. Suitable for woodworking, window frame manufacturers, shop fitters and car trim etc.

	1	- 4	-	-	
					NEW
Product	Face	Length	Weight	Order Code	Price/1
Code	(mm)	(mm)	each	THO-527	TB
61-952W	54	315	300g	-0446E	438.00
61-953W	64	315	300g	-0448G	541.00
61-954W	74	380	725g	-0450J	721.00
61-957W	90	380	1125g	-0452L	1029.00

# Solid Copper Mallet

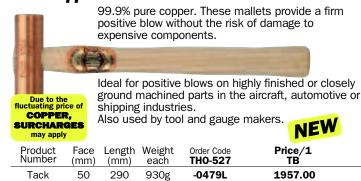

# **Rawhide Mallets**



# Laminated Compressed Wood Mallets

-	Compressed and laminated wooden mallet head with flush fitting glass fibre hoops to prevent the head from splitting.									
	1116	G	d.		-					
						NEW				
	Model Code	Face Ø (mm)	Length (mm)	Weight each	Order Code THO-527	Price/1 TB				
	62-8050 62-8060 62-8070	48 58 67	290 320 360	300g 525g 750g	-0341B -0342C -0343D	1442.00 1854.00 2472.00				

### Rubber **=**D) Mallets

Soft faced for use where steel hammers would mark the surface. Provide a gentle but firm blow with little rebound. Solid hickory shafts.

All purpose mallet used widely for automotive, industrial, DIY and camping etc.

Face (mm)	Head Size (oz)	Length (mm)	Weight Per 6	Order Code KEN-525	Price/1 TB	
42	8	280	1.80kg	-9120K	125.00	
55	16	315	3.30kg	-9160K	166.00	
65	24	300	4.80kg	-9180K	216.00	

### Rubber Mallet



Soft faced for use where steel hammers would mark the surface. Provide a gentle but firm blow with little rebound. Solid wooden shafts.

SENATOR		
All purpose malle and camping etc	y for maintenance	, DIY

Face	Head Size		Weight	Order Code	Price/1
(mm)	(oz)		Per 6	SEN-525	TB
55	16	300	3.10kg	-9160K	188.00

# **DeadBlow™ Hammer**



### **SafeBlower™** SAFEBLOWER Hammers

With solid steel bar shaft and hollow head.

Inside the polyurethane moulded hammer head are thousands of steel pellets which impact a split

second after the hammer face, reducing rebound whilst also adding to the force of the blow.



Face (mm)	Head Size (oz)	Length (mm)	Weight each	Order Code KEN-525	Price/1 TB
33	14	280	0.45kg	-9420K	848.00
43	20	300	0.60kg	-9440K	995.00
48	28	350	0.80kg	-9460K	1246.00
53	38	350	1.00kg	-9480K	1406.00
68	45	375	1.25kg	-9500K	1721.00
			-		

2 Piece SafeBlower Set									
Number of Pieces	Contents	Weight each	Order Code KEN-525	Price/1 TB					
2	14 & 28oz	1.25kg	-9550K	1842.00					

### **PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR** © 2014



HAND TOOLS