

**KENNEDY PROFESSIONAL Insulated Adjustable Wrenches**

Manufactured from chrome vanadium steel with hardened parallel opening jaws that are ground and polished, laser etched with metric graduations for rapid repeatable reference setting. The wide grooved profile of the opening mechanism and coarsely knurled adjusting screw ensures smooth adjustment. Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.



| Overall Length | Capacity | Weight each | Order Code KEN-534 | Price/1 TB |
|----------------|----------|-------------|--------------------|------------|
| 200mm          | 24mm     | 336g        | -6080K             | 2363.00    |
| 250mm          | 30mm     | 551g        | -6100K             | 2908.00    |
| 300mm          | 34mm     | 870g        | -6120K             | 3547.00    |

**Insulated Spanners**

Chrome vanadium single ended open jaw spanners. Spanner dimensions conform to **DIN 7446**. Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.

**Single End Open Jaw**



| Size | Weight each | Order Code KEN-534 | Price/1 TB |
|------|-------------|--------------------|------------|
| 10mm | 30g         | -8800K             | 979.00     |
| 11mm | 45g         | -8810K             | 979.00     |
| 12mm | 60g         | -8820K             | 979.00     |
| 13mm | 60g         | -8830K             | 1004.00    |
| 14mm | 70g         | -8840K             | 1133.00    |
| 15mm | 85g         | -8850K             | 1133.00    |
| 16mm | 115g        | -8860K             | 1236.00    |
| 17mm | 110g        | -8870K             | 1288.00    |
| 18mm | 135g        | -8880K             | 1313.00    |
| 19mm | 150g        | -8890K             | 1339.00    |
| 21mm | 205g        | -8910K             | 1391.00    |
| 24mm | 250g        | -8940K             | 1468.00    |


**Insulated Single End Ring Spanners**



| Size | Weight each | Order Code KEN-534 | Price/1 TB |
|------|-------------|--------------------|------------|
| 10mm | 85g         | -9200K             | 1133.00    |
| 11mm | 110g        | -9210K             | 1133.00    |
| 12mm | 120g        | -9220K             | 1133.00    |
| 13mm | 125g        | -9230K             | 1236.00    |
| 14mm | 175g        | -9240K             | 1288.00    |
| 15mm | 135g        | -9250K             | 1442.00    |
| 16mm | 175g        | -9260K             | 1494.00    |
| 17mm | 190g        | -9270K             | 1597.00    |
| 18mm | 220g        | -9280K             | 1700.00    |
| 19mm | 250g        | -9290K             | 1803.00    |
| 21mm | 310g        | -9310K             | 1906.00    |
| 22mm | 325g        | -9320K             | 2009.00    |
| 24mm | 340g        | -9340K             | 2163.00    |

**Insulated Hacksaw**

Die cast frame with 'D' style handle for user comfort and control. Wing nut blade tensioning. Supplied complete with 300mm 24tpi blade. Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.

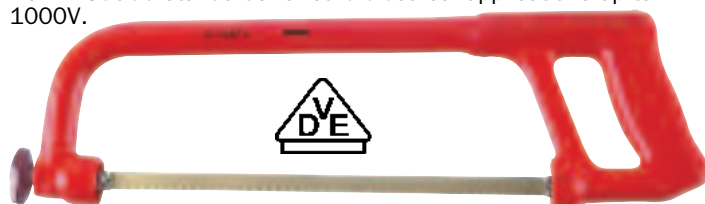

| Overall Length | Weight each | Order Code KEN-534 | Price/1 TB |
|----------------|-------------|--------------------|------------|
| 400mm          | 619g        | -0800K             | 3677.00    |

**Insulated Cable Knives**

Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.



**Curved Blade**

Steel hook blade for splitting flat and ribbon cables along its length.



**Straight Blade**

Fixed straight blade and protection cap. **Blade length: 45mm.**



| Overall Length         | Weight each | Order Code KEN-534 | Price/1 TB |
|------------------------|-------------|--------------------|------------|
| 180mm - Curved Blade   | 65g         | -3480K             | 652.00     |
| 180mm - Straight Blade | 65g         | -3500K             | 534.00     |

**Insulated Cable Cutters**

Manufactured from drop forged high carbon steel with induction hardened blades. Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.



| Overall Length | Capacity | Weight each | Order Code KEN-534 | Price/1 TB |
|----------------|----------|-------------|--------------------|------------|
| 240mm          | 22mm     | 398g        | -4960K             | 2671.00    |

**Insulated Junior Hacksaw**

Quality tested and insulated to 1000V AC and 1500V DC for live line working. All insulation is moulded in one piece, thus avoiding possible air gaps or other potential hazards. Uses conventional junior hacksaw blades. **IEC: 60900:2004.**



| Overall Length | Weight each | Order Code KEN-534 | Price/1 TB |
|----------------|-------------|--------------------|------------|
| 150mm (6")     | 264g        | -0600K             | 2019.00    |

**KENNEDY  
PROFESSIONAL**

### Insulated Pump/ Box Joint Pliers

Hardened chromed steel jaws. Sliding pivot joint allows the widest range of jaw openings. Serrated jaws for gripping flat and round parts. The handles cannot be closed together, preventing trapped fingers.




Fully insulated to conform to **VDE 0680/201, IEC 900** and **BS EN 60900** standards for safe electrical applications up to 1000V.

| Overall Length | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|----------------|-------------|------------------------------|----------------|
| 240mm          | 55g         | <b>-4860K</b>                | <b>1889.00</b> |

### Insulated Ratcheting Cable Cutter

For copper and aluminium cables up to 32mm diameter. Lightweight steel handles with insulated vinyl hand grips. Fixed and moving blade made from high grade alloy steel. Combines lightweight and ratcheted mechanical advantage in its circular cutting motion. Quality tested **BS EN 60900** and insulated to 1000V AC.

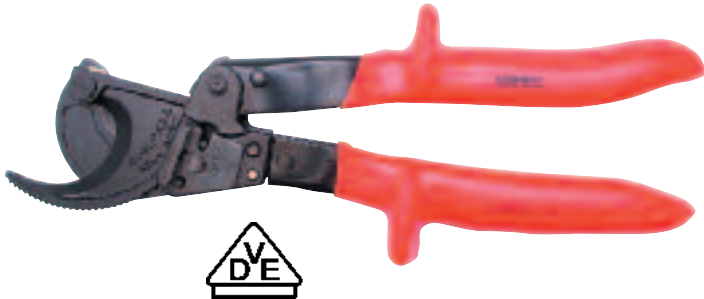

| Overall Length | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB      |
|----------------|-------------|------------------------------|-----------------|
| 250mm (10")    | 678g        | <b>-5000K</b>                | <b>11253.00</b> |

### Insulated Sockets & Accessories

All products are quality tested and fully insulated to 1000V AC. Conforms to **VDE 0680/201** and **IEC 900** standards. All 1/2" square drive.

#### Insulated Reversible Ratchet Handle



| Description               | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|---------------------------|-------------|------------------------------|----------------|
| Reversible Ratchet Handle | 660g        | <b>-7400K</b>                | <b>6580.00</b> |

#### 200mm Insulated T-Handle



| Description    | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|----------------|-------------|------------------------------|----------------|
| 200mm T-Handle | 450g        | <b>-7420K</b>                | <b>2730.00</b> |

## INSULATED SERVICE TOOLS

### Insulated Dismantling Cable Knife



Insulated dismantling cable knife complete with protection cap. Quality tested to 1000V AC. Comfortable handle, fixed sickle shaped blade for cutting sector cables. Conforms to **VDE 0680/201** and **IEC 900** standards.

**Blade length:** 45mm.



| Overall Length | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|----------------|-------------|------------------------------|----------------|
| 180mm          | 70g         | <b>-3540K</b>                | <b>1824.00</b> |

### Insulated Tweezers

Straight/bent pattern tweezers with serrated gripping surfaces, quality tested and insulated to 1000V AC. Conforms to **EN 60900** standards.

**Overall length:** 145mm. **Exposed blade length:** 15mm.

#### Straight Pattern



#### Bent Pattern



| Overall Length   | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|------------------|-------------|------------------------------|----------------|
| 145mm - Straight | 40g         | <b>-1120K</b>                | <b>918.00</b>  |
| 145mm - Curved   | 40g         | <b>-1140K</b>                | <b>1112.00</b> |

#### 125 & 250mm Insulated Extension Bars



| Description         | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|---------------------|-------------|------------------------------|----------------|
| 125mm Extension Bar | 200g        | <b>-7440K</b>                | <b>2704.00</b> |
| 250mm Extension Bar | 270g        | <b>-7460K</b>                | <b>2987.00</b> |

#### Insulated Single Hexagon Sockets

| Type       | Size | Overall Length | Weight each | Order Code<br><b>KEN-534</b> | Price/1 TB     |
|------------|------|----------------|-------------|------------------------------|----------------|
| Metric<br> | 10mm | 37             | 60g         | <b>-7500K</b>                | <b>876.00</b>  |
|            | 11mm | 37             | 60g         | <b>-7510K</b>                | <b>876.00</b>  |
|            | 12mm | 37             | 60g         | <b>-7520K</b>                | <b>876.00</b>  |
|            | 13mm | 37             | 70g         | <b>-7530K</b>                | <b>876.00</b>  |
|            | 14mm | 37             | 60g         | <b>-7540K</b>                | <b>876.00</b>  |
|            | 15mm | 37             | 60g         | <b>-7550K</b>                | <b>876.00</b>  |
|            | 16mm | 37             | 70g         | <b>-7560K</b>                | <b>901.00</b>  |
|            | 17mm | 37             | 80g         | <b>-7570K</b>                | <b>901.00</b>  |
|            | 18mm | 37             | 90g         | <b>-7580K</b>                | <b>901.00</b>  |
|            | 19mm | 37             | 90g         | <b>-7590K</b>                | <b>979.00</b>  |
|            | 20mm | 37             | 100g        | <b>-7600K</b>                | <b>1004.00</b> |
|            | 21mm | 37             | 95g         | <b>-7610K</b>                | <b>1009.00</b> |
|            | 22mm | 37             | 105g        | <b>-7620K</b>                | <b>1029.00</b> |
|            | 24mm | 37             | 135g        | <b>-7640K</b>                | <b>1128.00</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**

## GROUP 534 INSULATED SERVICE TOOLS

### KENNEDY Insulated Interchangeable Screwdriver Set

Ergonomic insulated full size handle, swivel cap and eight interchangeable drivers supplied in a compact protective pouch with belt loop. 2-in-1 design, use the detachable swivel cap for fast (low torque) driving, or use the full size detachable ergonomic handle for higher torque fastening. Safe up to 1000V AC/1500V DC.



**10  
PIECES**

#### 10 Piece Set Contents (mm):

**PARALLEL**  
0.4 x 2.5 x 100mm,  
0.5 x 3.0 x 100mm,  
0.8 x 4.0 x 100mm,  
1.0 x 5.5 x 100mm and  
1.2 x 6.5 x 100mm.

**CROSS POINT**  
No.0 x 100mm,  
No.1 x 100mm and  
No.2 x 100mm.

| Number of Pieces | Weight each | Order Code                      | Price/1 TB     |
|------------------|-------------|---------------------------------|----------------|
| 10               | 365g        | <b>KEN-572</b><br><b>-5870K</b> | <b>2014.00</b> |



### 1000V Dual Grip VDE Screwdrivers

A fully insulated screwdriver VDE tested up to 1000V. Professional high grip handles, magnetic tips, chrome vanadium steel blades.



#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



| Tip Size | Blade Length | Weight each | Order Code    | Price/1 TB    |
|----------|--------------|-------------|---------------|---------------|
| No.0     | 60mm         | 20g         | <b>-7900K</b> | <b>322.00</b> |
| No.1     | 80mm         | 60g         | <b>-7910K</b> | <b>375.00</b> |
| No.2     | 100mm        | 90g         | <b>-7920K</b> | <b>448.00</b> |

#### Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.



| Tip Size | Blade Length | Weight each | Order Code    | Price/1 TB    |
|----------|--------------|-------------|---------------|---------------|
| 2.5mm    | 75mm         | 20g         | <b>-7940K</b> | <b>322.00</b> |
| 4.0mm    | 100mm        | 60g         | <b>-7950K</b> | <b>375.00</b> |
| 5.5mm    | 125mm        | 75g         | <b>-7960K</b> | <b>480.00</b> |
| 6.5mm    | 150mm        | 110g        | <b>-7970K</b> | <b>521.00</b> |

#### Set Contents:

**PARALLEL**  
2.5 x 75,  
4.0 x 100,  
5.5 x 125,  
6.5 x 150mm.

**CROSS POINT**  
No.0 x 60,  
No.1 x 80,  
No.2 x 100mm.

**7  
PIECES**

| Number of Pieces | Weight each | Order Code    | Price/1 TB     |
|------------------|-------------|---------------|----------------|
| 7                | 715g        | <b>-8000K</b> | <b>1586.00</b> |



### Electrician's VDE Square Section Handle Screwdrivers

Volt-tested to ensure safety on or near electrical equipment up to 1000V AC or 1500V DC. Insulated blades with magnetic tips. Conform with DIN 7438 and DIN EN 60900.



#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



| Tip Size | Blade Length | Weight each | Order Code    | Price/1 TB    |
|----------|--------------|-------------|---------------|---------------|
| No.0     | 75mm         | 27g         | <b>-5820K</b> | <b>99.00</b>  |
| No.1     | 100mm        | 50g         | <b>-5830K</b> | <b>118.00</b> |
| No.2     | 100mm        | 80g         | <b>-5840K</b> | <b>136.00</b> |

#### Parallel Tip

Slotted head screws are the most commonly used screw. The tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping.



| Tip Size | Blade Length | Weight each | Order Code    | Price/1 TB    |
|----------|--------------|-------------|---------------|---------------|
| 2.5mm    | 85mm         | 30g         | <b>-5760K</b> | <b>112.00</b> |
| 4.0mm    | 100mm        | 45g         | <b>-5780K</b> | <b>117.00</b> |
| 5.5mm    | 125mm        | 80g         | <b>-5790K</b> | <b>164.00</b> |
| 6.5mm    | 150mm        | 100g        | <b>-5800K</b> | <b>171.00</b> |

#### Set Contents:


Supplied in clear plastic wallet.

**PARALLEL**  
2.5 x 85,  
4.0 x 100,  
5.5 x 125,  
6.5 x 150mm.

**CROSS POINT**  
No.0 x 75,  
No.1 x 100,  
No.2 x 100mm.

**7  
PIECES**

| Number of Pieces | Weight each | Order Code    | Price/1 TB    |
|------------------|-------------|---------------|---------------|
| 7                | 495g        | <b>-5900K</b> | <b>954.00</b> |

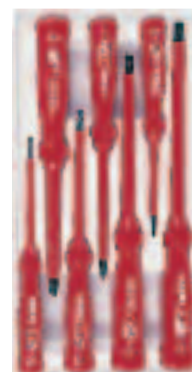




## INSULATED SERVICE TOOLS

**KENNEDY  
PROFESSIONAL**

### Pro-Torq Insulated Pliers

Especially suitable for production line environments where repetitive work is undertaken. Double polished head and joint with induction hardened cutting edges.

#### Insulated End Wire Strippers

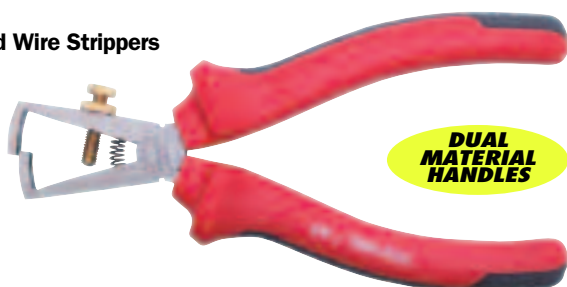

**DUAL  
MATERIAL  
HANDLES**



1000V AC

VDC/IEC 900  
DIN EN 60900

| Overall Length                           | Weight each | Order Code<br><b>KEN-558</b> | Price/1 TB    |
|--|-------------|------------------------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 199g        | <b>-5200K</b>                | <b>549.00</b> |

#### Insulated Diagonal Cutting Nippers




**DUAL  
MATERIAL  
HANDLES**



| Overall Length                           | Weight each | Order Code<br><b>KEN-558</b> | Price/1 TB    |
|--|-------------|------------------------------|---------------|
| 145mm (5 <sup>3</sup> / <sub>4</sub> " ) | 215g        | <b>-5080K</b>                | <b>608.00</b> |
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 205g        | <b>-5100K</b>                | <b>740.00</b> |
| 205mm (8" )                              | 262g        | <b>-5120K</b>                | <b>782.00</b> |

#### Insulated Snipe Nose Pliers

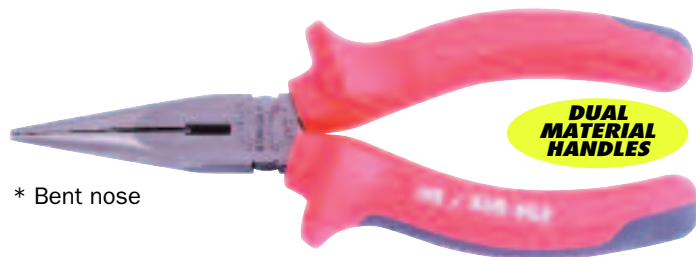


**DUAL  
MATERIAL  
HANDLES**

\* Bent nose



| Overall Length                           | Weight each | Order Code<br><b>KEN-558</b> | Price/1 TB    |
|--|-------------|------------------------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 157g        | <b>-5020K</b>                | <b>554.00</b> |
| 205mm (8" )                              | 221g        | <b>-5040K</b>                | <b>599.00</b> |
| 205mm (8" )*                             | 212g        | <b>-5060K</b>                | <b>656.00</b> |

#### Insulated Combination Pliers

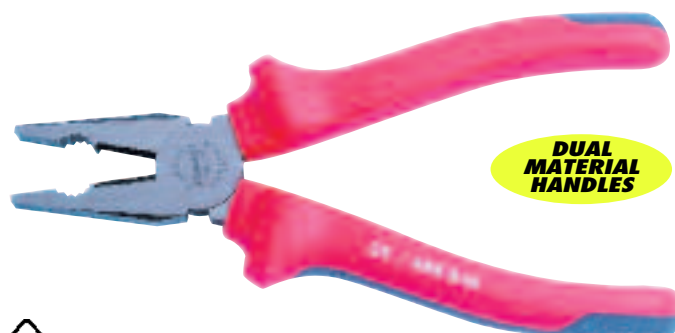

**DUAL  
MATERIAL  
HANDLES**



| Overall Length                           | Weight each | Order Code<br><b>KEN-558</b> | Price/1 TB    |
|--|-------------|------------------------------|---------------|
| 160mm (6 <sup>3</sup> / <sub>8</sub> " ) | 226g        | <b>-5140K</b>                | <b>616.00</b> |
| 180mm (7" )                              | 290g        | <b>-5160K</b>                | <b>649.00</b> |
| 205mm (8" )                              | 344g        | <b>-5180K</b>                | <b>673.00</b> |

### 16-Piece Electrician's VDE Tool Bag & Kit

Heavy-duty tear-resistant tool bag with velcro fastening flap. Double-webbed shoulder strap fixed with metal release clasps. Two removable tool boards inside which have a unique tool storage securing system built-in. All tools are VDE approved.

#### Contents:

Electrician's tool bag (320 x 340 x 125mm).  
150mm euro tester will detect 'live' electricity supply.  
Suitable for AC to 125 - 250V.  
3mm wide tip. Conform to VDE 0630 Part 4.  
145mm (5<sup>3</sup>/<sub>4</sub>" ) Pro-Torq grip diagonal nipper 1000V insulated.  
160mm (6<sup>3</sup>/<sub>8</sub>" ) Pro-Torq snipe nose plier 1000V insulated.  
165mm (6<sup>1</sup>/<sub>2</sub>" ) Pro-Torq engineers' combination plier 1000V insulated. 170mm (6<sup>3</sup>/<sub>4</sub>" ) Pro-Torq wire stripper 1000V insulated.  
7-pce VDE dual grip screwdriver set: No.0 x 60, No.1 x 80 and No.2 x 100mm, 2.5 x 75, 4.0 x 100, 5.5 x 125 and 6.5 x 150mm.  
180mm (7" ) insulated cable knife, curved blade.  
2x small parts storage boxes.



**16  
PIECES**

| Width (mm) | Depth (mm) | Height (mm) | Weight each | Order Code<br><b>KEN-595</b> | Price/1 TB     |
|------------|------------|-------------|-------------|------------------------------|----------------|
| 320        | 125        | 340         | 3.50kg      | <b>-3400K</b>                | <b>7699.00</b> |

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**