

All Kennedy Professional Safety tools can be used in ATEX zones accordingly to ATEX specifications.

Safe for use in high risk hazardous locations, Ideal for chemical, pharmaceutical, power, oil and gas and fire rescue.

For gases, vapours and mists the zone classifications are:

**Zone 1** A place in which an explosive atmosphere consisting of a mixture with air of dangerous substances in the form of gas, vapour or mist is likely to occur in normal operation occasionally.

**Zone 2** A place in which an explosive atmosphere consisting of a mixture with air of dangerous substances in the form of gas, vapour or mist is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

For dusts the zone classifications are:

**Zone 21** A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is likely to occur in normal operation occasionally.

**Zone 22** A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

**KENNEDY  
PROFESSIONAL**

## Aluminium-Bronze Spark-Resistant Safety Tools



Spark-resistant tools are used to eliminate the chances of accidental fires or explosions in potentially combustible or explosive environments. They resist the sparks that a standard tool could potentially create when striking hard surfaces. The use of spark resistant tools is essential in many industrial applications such as petroleum and chemical manufacturing, spray booth operations, the marine industry, the mining industry, the paper industries, or any location where flammable vapours or combustible residues are present. Aluminium-bronze spark resistant safety tools are manufactured to 25HRC and offer a breaking strain of 75 - 85kgf/mm<sup>2</sup>.

**Spark-resistant tools must be maintained with special care. Frequent cleaning/re-dressing to remove ferrous particles or contaminants, which may impair the spark-resistant properties, is essential.**

### Screwdrivers



**ATEX  
Compliant**




Type	Tip Size	Blade Length	Weight each	Order Code KEN-575	Price/1 TB
	No.1	75	55g	-4520K	803.00
	No.2	100	60g	-4540K	1003.00
	No.3	150	100g	-4560K	1405.00
	No.4	200	120g	-4580K	1706.00
	6.0mm	100	60g	-4020K	1003.00
	6.0mm	150	80g	-4040K	1405.00
	7.5mm	200	120g	-4060K	1706.00
	9.0mm	250	180g	-4080K	2308.00
	9.0mm	300	200g	-4100K	2810.00

### Long Nose Pliers

With side cutter, serrated jaws and safety grips.



**ATEX  
Compliant**

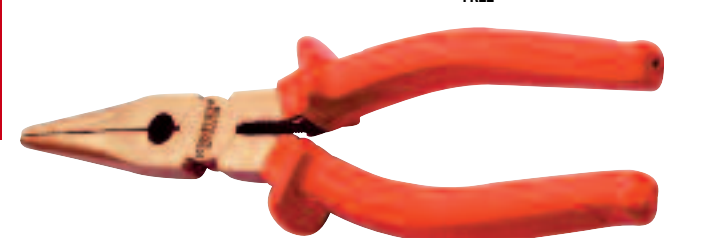


Overall Length	Weight each	Order Code KEN-575	Price/1 TB
200mm (8")	155g	-3880K	3547.00

### Groove Joint Pliers

Serrated jaws with sliding pivot joint which allows a wide range of jaw opening.



**ATEX  
Compliant**

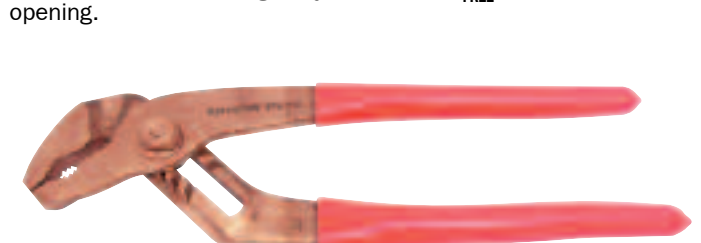


Overall Length	Maximum Capacity	Weight each	Order Code KEN-575	Price/1 TB
250mm	45mm	415g	-3900K	5035.00

### Adjustable Combination Pliers

Serrated teeth with sliding pivot joint.  
Overall length: 203mm (8").



**ATEX  
Compliant**

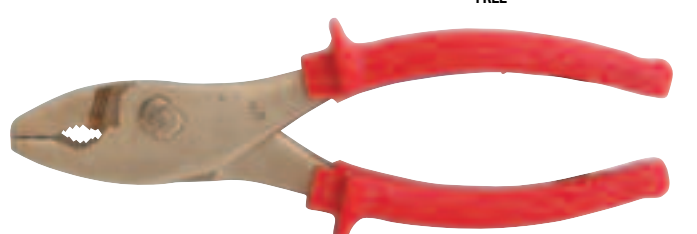


Overall Length	Weight each	Order Code KEN-575	Price/1 TB
200mm (8")	335g	-3940K	5330.00

### Linesman Pliers

Serrated jaws for gripping nuts, bolts, studs etc. with side cutter and slip guard safety handles.



**ATEX  
Compliant**

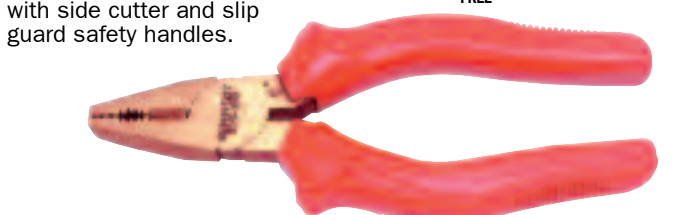

Overall Length	Weight each	Order Code KEN-575	Price/1 TB
150mm (6")	165g	-3800K	3082.00
180mm (7")	310g	-3810K	3501.00
200mm (8")	370g	-3820K	4561.00

### Diagonal Cutting Nippers

The cutting edge is offset at a slight angle to allow close cuts to a flat surface. Slip guard safety handles.




**ATEX  
Compliant**



Overall Length	Weight each	Order Code KEN-575	Price/1 TB
150mm (6")	190g	-3850K	3850.00
200mm (8")	285g	-3860K	4146.00

**KENNEDY  
PROFESSIONAL****Ball Pein  
Hammers**

For use with cold chisels, punches, rivets and for shaping metal.  
Fine grain hardwood shaft.

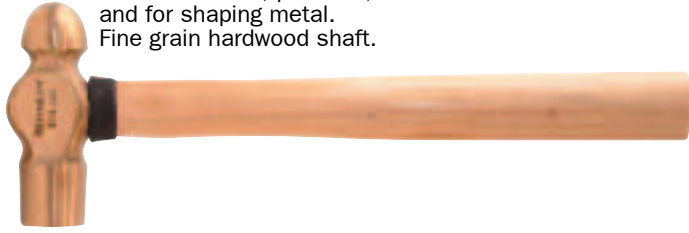ATEX  
Compliant

Head Weight	Overall Length (mm)	Weight each	Order Code KEN-575	Price/1 TB
1lb	310	680g	-3020K	2006.00
1½lb	340	950g	-3040K	2911.00
2lb	350	1205g	-3060K	3139.00

**Flat Cold Chisels**ATEX  
Compliant

Size (mm)	Overall Length (mm)	Weight each	Order Code KEN-575	Price/1 TB
14	160	160g	-2020K	1126.00
16	160	210g	-2040K	1126.00
18	200	345g	-2060K	1126.00
20	200	430g	-2080K	1706.00
20	300	645g	-2100K	2369.00
25	240	800g	-2120K	3991.00
25	300	1000g	-2140K	4383.00
25	400	1360g	-2160K	4738.00

**Wrecking Bar**

For general dismantling and stripping applications.  
V-notch for use on nails.

Overall Length	Weight each	Order Code KEN-575	Price/1 TB
400mm	685g	-2520K	7023.00

**Wedges**ATEX  
Compliant

Dimensions	Weight each	Order Code KEN-575	Price/1 TB
80 x 13 x 6mm	25g	-0500K	172.00
135 x 50 x 18mm	497g	-0510K	2825.00
150 x 25 x 13mm	205g	-0520K	1007.00
180 x 32 x 13mm	305g	-0540K	1309.00
180 x 50 x 19mm	700g	-0560K	3258.00
200 x 50 x 13mm	500g	-0580K	2310.00
200 x 30 x 30mm	1315g	-0600K	2701.00
200 x 40 x 40mm	1200g	-0620K	6811.00

**Marking Tool**

Double-ended spark resistant marking tool.  
Overall length: 190mm.

Overall Length	Weight each	Order Code KEN-575	Price/1 TB
190mm (7½")	20g	-1800K	1126.00

**Putty Knife**

Spark resistant putty knife with a chisel point.  
Blade length: 100mm (4"), Overall length: 200mm (8").

Blade Length	Blade Width	Overall Length	Order Code KEN-575	Price/1 TB
100mm (4")	25mm (1")	200mm (8")	-2740K	1771.00

**Scraper**

Blade length: 95mm (3¾"). Blade width: 75mm (3").  
Overall length: 200mm (8").

Blade Length	Blade Width	Overall Length	Order Code KEN-575	Price/1 TB
95mm (3¾")	75mm (3")	200mm (8")	-2860K	1700.00

**Sledge Hammers**

Spark-resistant sledge hammers with wooden handles.

Head Size	Length Capacity	Weight each	Order Code KEN-575	Price/1 TB
1.0kg	400mm (16")	1.30kg	-3200K	4389.00
2.5kg	900mm (35")	3.41kg	-3240K	7390.00
3.0kg	900mm (35")	3.91kg	-3260K	12437.00
8.0kg	900mm (35")	8.91kg	-3300K	28428.00

**Chisel Cross**

4-point spark resistant chisel with 20mm wide hexagon shaft.  
Length: 200mm.

Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
7mm	200mm (8")	290g	-2300K	3310.00

**Drift Punch**

Tapered punch, used for the purpose of aligning holes between two structural members so that they can be fastened or bolted together.

Overall length: 160mm.  
Tip size: 3mm.

Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
3mm	160mm (6")	290g	-1600K	1771.00

**Square Shovel**

Spark resistant shovel with square mouth, polypropylene 'YD' handle and wooden shaft.


Blade size: 235 x 185mm.  
Overall length: 950mm.

Head Type	Head Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
Square	235 x 185mm	950mm (37")	1.80kg	-9240K	7404.00

## GROUP 575 SAFETY TOOLS

### KENNEDY PROFESSIONAL Pipe Wrenches

Serrated jaws with knurled adjusting nut.

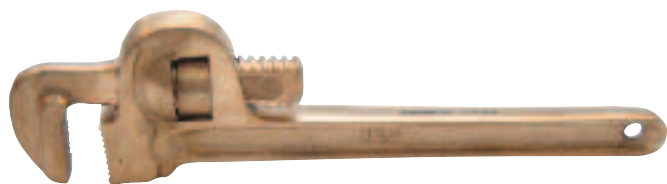

#### Heavy Duty

Overall Length	Jaw Capacity	Weight each	Order Code KEN-575	Price/1 TB
250mm	30mm	0.80kg	-3580K	3648.00
300mm	40mm	1.20kg	-3600K	5774.00
350mm	50mm	1.55kg	-3620K	7404.00
450mm	60mm	2.45kg	-3640K	8554.00
600mm	75mm	3.65kg	-3660K	12885.00

### Open End Slogging Wrench

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
24mm	165mm	275g	-6400K	1989.00
27mm	175mm	350g	-6410K	2888.00
30mm	185mm	470g	-6420K	3330.00
32mm	195mm	535g	-6430K	4056.00
36mm	210mm	780g	-6440K	4730.00
41mm	225mm	965g	-6450K	6142.00
46mm	240mm	1140g	-6460K	7736.00
50mm	255mm	1445g	-6470K	8982.00
55mm	270mm	1705g	-6480K	10515.00
60mm	285mm	2015g	-6490K	11410.00
65mm	305mm	3060g	-6500K	11719.00
70mm	325mm	3620g	-6510K	12087.00
75mm	345mm	3905g	-6520K	12561.00

### Single Open End Spanners



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
10mm	103mm		-5020K	2006.00
14mm	125mm		-5040K	2709.00
17mm	143mm		-5060K	3411.00
19mm	157mm		-5080K	4415.00
24mm	195mm		-5100K	5820.00
27mm	221mm		-5120K	6623.00
30mm	258mm		-5140K	6019.00
32mm	272mm		-5160K	7224.00
36mm	300mm		-5180K	8127.00

### Adjustable Wrenches

Smooth jaw adjustment with self-locking design which prevents the jaws opening unintentionally under load.



Overall Length	Opening Capacity	Weight each	Order Code KEN-575	Price/1 TB
150mm	18mm	120g	-1060K	2508.00
200mm	24mm	255g	-1080K	5211.00
250mm	30mm	410g	-1100K	6122.00
300mm	36mm	655g	-1120K	7492.00

### Ratchet Handle

Disc type adjustment with knurled grip and spring loaded ball bearing socket retainer.



Square Drive	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
1/2"	245mm	615g	-7000K	6291.00
3/4"	320mm	1430g	-8000K	11903.00

### 1/2" Square Drive Swivel Handle

The hinged link allows operation at varied angles to aid access in restricted areas. Fitted with a spring loaded ball bearing socket retainer.



Square Drive	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
1/2"	250mm	310g	-7100K	4680.00

### Ring End Slogging Wrench

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.



EXTENDED RANGE



Size	Overall length	Weight each	Order Code KEN-575	Price/1 TB
24mm	140mm	250g	-6600K	1976.00
27mm	150mm	350g	-6610K	2528.00
30mm	165mm	460g	-6620K	3316.00
32mm	180mm	610g	-6630K	4051.00
36mm	210mm	780g	-6640K	5107.00
41mm	225mm	985g	-6650K	7760.00
46mm	245mm	1275g	-6660K	8813.00
50mm	255mm	1545g	-6670K	10345.00
55mm	265mm	1720g	-6680K	12460.00
60mm	275mm	2080g	-6690K	13111.00
65mm	290mm	2440g	-6700K	13847.00
70mm	300mm	2735g	-6710K	15514.00
75mm	315mm	3190g	-6720K	17517.00
80mm	342mm	3320g	-6725K	19055.00

### Combination Spanners



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
8mm	125mm	40g	-6020K	2006.00
10mm	138mm	59g	-6040K	2006.00
11mm	141mm	65g	-6060K	2006.00
12mm	146mm	78g	-6080K	2107.00
13mm	156mm	89g	-6100K	2208.00
14mm	168mm	98g	-6120K	2208.00
15mm	176mm	100g	-6140K	2408.00
16mm	185mm	130g	-6160K	2408.00
17mm	197mm	148g	-6180K	2609.00
18mm	205mm	168g	-6200K	2609.00
19mm	216mm	190g	-6220K	3010.00
21mm	235mm	235g	-6240K	3311.00
22mm	248mm	260g	-6260K	3311.00
24mm	268mm	335g	-6280K	3813.00
27mm	288mm	444g	-6300K	4415.00
32mm	330mm	703g	-6320K	8829.00
36mm	345mm	1002g	-6340K	10735.00



**KENNEDY  
PROFESSIONAL**

## Safety Extensions

Fitted with a spring-loaded ball bearing socket retainer.



ATEX  
Compliant



Square Drive	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
1/2"	125mm	230g	-7040K	3546.00
1/2"	250mm	455g	-7060K	3987.00
3/4"	200mm	870g	-8040K	5147.00

## Universal Joint 1/2" Square Drive

Hinged through 180° in both directions for operation at varying angles. Fitted with a spring-loaded ball bearing socket retainer.



ATEX  
Compliant



Overall Length	Weight each	Order Code KEN-575	Price/1 TB
50mm	170g	-7120K	2243.00

## Sliding T-Handles

The sliding bar gives many options for leverage within a given space. Fitted with a spring-loaded ball bearing socket retainer.



ATEX  
Compliant



Square Drive	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
1/2"	250mm	310g	-7020K	5735.00
3/4"	400mm	980g	-8020K	6786.00

## Speed Brace 1/2" Square Drive

Revolving grip, ideal for nut spinning. Fitted with a spring-loaded ball bearing socket retainer.



ATEX  
Compliant




Overall Length	Weight each	Order Code KEN-575	Price/1 TB
400mm	700g	-7080K	4089.00

## Socket Set 1/2" Square Drive

**Sockets:** 10, 11, 12, 14, 17, 19, 22, 24, 27, 30 and 32mm.

**Accessories:** 250mm ratchet wrench, 250mm sliding T-handle, 400mm speed brace, 125 and 250mm socket extensions.

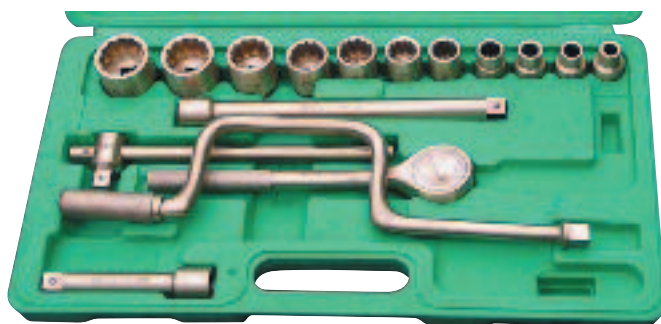

Number of Pieces	Weight each	Order Code KEN-575	Price/1 TB
17	4.50kg	-7500K	53789.00

## Sockets

12 point bi-hexagon.



ATEX  
Compliant



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
<b>1/2" Drive</b>				
10mm	40mm	71g	-7220K	2156.00
11mm	40mm	72g	-7200K	1894.00
12mm	40mm	72g	-7230K	1983.00
13mm	40mm	73g	-7240K	2551.00
14mm	40mm	73g	-7260K	2640.00
17mm	40mm	80g	-7280K	2895.00
19mm	42mm	100g	-7300K	3061.00
21mm	43mm	125g	-7320K	3235.00
22mm	43mm	130g	-7330K	2694.00
24mm	43mm	170g	-7340K	3916.00
27mm	43mm	215g	-7380K	3933.00
30mm	46mm	260g	-7400K	4669.00
32mm	46mm	290g	-7420K	5147.00
<b>3/4" Drive</b>				
21mm	55mm	245g	-8220K	2900.00
24mm	55mm	280g	-8240K	3499.00
27mm	55mm	285g	-8260K	4298.00
30mm	60mm	370g	-8280K	5107.00
32mm	60mm	410g	-8300K	5667.00
34mm	60mm	440g	-8320K	6202.00
36mm	60mm	465g	-8340K	6729.00
38mm	60mm	510g	-8360K	7279.00
41mm	65mm	640g	-8380K	8018.00
46mm	65mm	705g	-8400K	9254.00
50mm	70mm	840g	-8420K	10013.00

## Impact Sockets

12-point, for additional torque grip.



ATEX  
Compliant



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 TB
<b>3/4" Drive</b>				
27mm	55mm	360g	-8530K	3495.00
36mm	60mm	565g	-8560K	6864.00
40mm	65mm	765g	-8580K	7699.00
50mm	70mm	1003g	-8590K	8588.00
<b>1" Drive</b>				
24mm	60mm	663g	-8820K	3554.00
27mm	60mm	672g	-8830K	3850.00
29mm	60mm	690g	-8840K	3969.00
34mm	70mm	772g	-8870K	7048.00
35mm	70mm	825g	-8880K	7107.00
36mm	70mm	835g	-8890K	7404.00
38mm	70mm	855g	-8900K	7522.00

## Socket Set 3/4" Square Drive

**Sockets:** 21, 24, 27, 30, 32, 34, 36, 38, 41, 46 and 50mm.

**Accessories:** 320mm ratchet wrench, 400mm sliding T-handle, 200mm socket extension.



Number of Pieces	Weight each	Order Code KEN-575	Price/1 TB
14	9.10kg	-8500K	87401.00