




**Chrome Molybdenum
Impact Sockets & Accessories**

Manufactured from high quality chrome molybdenum steel.
Black oxidised finish with permanent laser etched markings.

1/4" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129.**




Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
6	A	13.0	10.0	6.0	23.0	15g	-0640K	114.00
7	A	13.0	11.3	6.0	23.0	15g	-0650K	114.00
8	A	13.0	12.5	7.0	23.0	15g	-0660K	114.00
9	A	13.0	13.8	7.0	23.0	15g	-0670K	114.00
10	A	13.0	15.0	7.0	23.0	17g	-0680K	114.00
11	A	13.0	16.3	8.0	23.0	20g	-0690K	114.00
12	B	13.0	17.0	8.0	23.0	17g	-0700K	114.00
13	B	13.0	18.8	8.0	23.0	22g	-0710K	129.00
14	B	13.0	20.0	8.0	23.0	20g	-0720K	129.00

1/4" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
3/8" x 1/4"	40g	-7380K	552.00
1/4" x 3/8"	40g	-7400K	210.00

3/8" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129.**



Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
6	A	19.0	11.0	4.0	30.0	35g	-1240K	131.00
7	A	19.0	12.5	8.0	30.0	40g	-1250K	131.00
8	A	19.0	13.8	8.0	30.0	40g	-1260K	131.00
9	A	19.0	15.0	8.0	30.0	40g	-1270K	131.00
10	A	19.0	16.0	8.0	30.0	40g	-1280K	131.00
11	A	19.0	17.5	9.0	30.0	40g	-1290K	131.00
12	B	19.0	19.0	9.0	30.0	40g	-1300K	131.00
13	A	22.0	20.0	9.0	30.0	55g	-1310K	131.00
14	A	22.0	21.0	9.0	30.0	55g	-1320K	131.00
15	B	22.0	22.0	11.0	30.0	55g	-1330K	131.00
16	C	22.0	24.0	11.0	30.0	60g	-1340K	131.00
17	C	22.0	25.0	11.0	30.0	60g	-1350K	131.00
18	C	22.0	26.0	11.0	30.0	60g	-1360K	131.00
19	C	22.0	27.5	11.0	30.0	70g	-1370K	131.00
20	C	22.0	28.0	12.0	30.0	70g	-1380K	145.00
21	C	22.0	30.0	13.0	30.0	70g	-1390K	145.00
22	C	24.0	32.0	13.0	30.0	85g	-1400K	160.00

3/8" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
3/8" x 1/4"	40g	-7380K	552.00
1/4" x 3/8"	40g	-7400K	210.00
1/2" x 3/8"	70g	-7410K	210.00
3/8" x 1/2"	70g	-7420K	217.00

12 Piece Set - Metric

Standard length: 6, 7, 8, 9, 10, 11, 12, 13 and 14mm.

Accessories: 50 and 100mm extensions.
3/8" F to 1/4" M adaptor.




Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
12	625g	-9760K	1427.00

1/4" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583	Price/1 TB
50 (2")	24g	-7490K	201.00
100 (4")	43g	-7495K	221.00

3/8" Drive Inch Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**



Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
1/4"	A	19.0	11.0	4.0	30.0	30g	-1430K	226.00
5/16"	A	19.0	12.5	8.0	30.0	30g	-1440K	226.00
3/8"	A	19.0	14.5	8.0	30.0	35g	-1460K	226.00
7/16"	A	19.0	17.0	9.0	30.0	35g	-1470K	226.00
1/2"	B	19.0	19.0	9.0	30.0	35g	-1480K	226.00
9/16"	B	20.0	20.0	9.0	30.0	40g	-1490K	226.00
5/8"	B	24.0	24.0	11.0	30.0	70g	-1500K	226.00
11/16"	B	24.0	24.0	11.0	30.0	70g	-1510K	271.00
3/4"	B	26.0	26.0	11.0	30.0	80g	-1520K	271.00

3/8" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583	Price/1 TB
50 (2")	24g	-7500K	211.00
100 (4")	43g	-7510K	287.00



**12
PIECES**


IMPACT SOCKETS - 3/8" SQUARE DRIVE

GROUP 583

KENNEDY Impact Sockets

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

3/8" Drive Metric, Deep Length, 6-Point
Conform to: **DIN 3129.**



Style A




Style B



Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
7	A	19.0	12.5	12.0	65.0	75g	-1700K	203.00
8	A	19.0	13.8	12.0	65.0	80g	-1710K	203.00
10	A	19.0	16.0	12.0	65.0	80g	-1720K	203.00
11	A	19.0	17.5	25.0	65.0	80g	-1730K	203.00
12	B	19.0	19.0	25.0	65.0	90g	-1740K	203.00
13	A	22.0	20.0	25.0	65.0	120g	-1750K	204.00
14	A	22.0	21.0	25.0	65.0	120g	-1650K	203.00
15	B	22.0	22.0	25.0	65.0	120g	-1760K	204.00
16	C	22.0	24.0	25.0	65.0	140g	-1770K	226.00
17	C	22.0	25.0	25.0	65.0	140g	-1780K	239.00
18	C	22.0	26.0	25.0	65.0	150g	-1790K	252.00
19	C	22.0	27.5	25.0	65.0	170g	-1800K	264.00
21	C	22.0	30.0	25.0	65.0	185g	-1820K	276.00

3/8" Drive Inch Size, Deep Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A.**



Style A



Style B


Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/8"	A	19.0	14.5	12.0	65.0	80g	-1840K	165.00
7/16"	A	19.0	17.0	25.0	65.0	80g	-1850K	165.00
1/2"	B	19.0	19.0	25.0	65.0	90g	-1860K	165.00
9/16"	B	20.0	20.0	25.0	65.0	100g	-1870K	165.00
3/4"	B	26.0	26.0	25.0	65.0	100g	-1880K	217.00

KENNEDY Impact 3/8" Sq. Dr. Extractor Socket Set

Square Drive Impact Extractor Sockets
Extracts rounded, seized or painted right hand threaded fasteners, the reverse spiral flutes are designed to bite into seized nuts and bolts providing greater grip for extraction. The ejector pin is to drive out the fasteners from sockets, once removed.

Contents: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm extractor sockets plus ejector pin.

10 PIECES

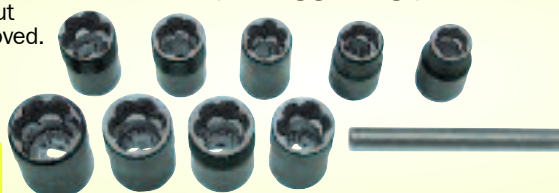

Replacement Ejector Pin

Product Number	Sizes (mm)	Weight each	Order Code KEN-583	Price/1 TB
SSE10M	10 - 19	660g	-9800K	2789.00

To Suit	Weight each	Order Code KEN-583	Price/1 TB
SSE10M	11g	-7960K	70.00

Hex Driver Impact Sockets 3/8" Sq. Dr.

3/8" Hexagon sizes:
4, 5, 6, 7, 8, 10 and 12mm.
Conforms to **DIN 3129.**



Size (mm)	Overall Length	Weight each	Order Code KEN-583	Price/1 TB
4	50mm	40g	-1960K	275.00
5	50mm	45g	-1962K	275.00
6	50mm	45g	-1964K	275.00
7	50mm	45g	-1966K	275.00
8	50mm	50g	-1968K	275.00
10	50mm	60g	-1970K	275.00
12	50mm	70g	-1972K	275.00

7 Piece Set
Contents as above.

7 PIECES



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
7	550g	-9820K	1693.00

Impact Socket Set

Standard length: metric 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

Standard length: A/F 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".

Deep metric: 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 and 21mm.

39 PIECES



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
39	3.50kg	-9810K	5169.00

Individual Extractor Sockets



Size (mm)	Weight each	Order Code KEN-583	Price/1 TB
10	33g	-1980K	272.00
11	34g	-1981K	272.00
12	35g	-1982K	272.00
13	36g	-1983K	272.00
14	37g	-1984K	272.00
15	51g	-1985K	272.00
16	57g	-1986K	272.00
17	68g	-1987K	272.00
19	85g	-1989K	272.00


PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.



1/2" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129**.



Style A



Style B



Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
9	A	25.0	12.0	12.0	38.0	90g	-2010K	160.00
10	A	25.0	17.5	12.0	38.0	90g	-2020K	155.00
11	A	25.0	18.7	12.0	38.0	95g	-2030K	155.00
12	A	25.0	20.0	12.0	38.0	100g	-2040K	155.00
13	A	25.0	21.0	12.0	38.0	100g	-2050K	155.00
14	A	25.0	22.5	12.0	38.0	100g	-2060K	155.00
15	A	30.0	23.7	12.0	38.0	140g	-2070K	178.00
16	A	30.0	25.0	12.0	38.0	140g	-2080K	187.00
17	A	30.0	26.0	13.0	38.0	140g	-2090K	187.00
18	A	30.0	27.5	13.0	38.0	140g	-2100K	187.00
19	A	30.0	28.7	13.0	38.0	140g	-2110K	187.00
20	B	30.0	30.0	13.0	38.0	140g	-2120K	197.00
21	B	30.0	30.0	13.0	38.0	130g	-2130K	197.00
22	C	30.0	32.0	13.0	38.0	140g	-2140K	208.00
23	C	30.0	32.0	13.0	38.0	140g	-2150K	221.00
24	C	30.0	35.0	20.0	45.0	180g	-2160K	251.00
26	C	30.0	38.0	22.0	50.0	200g	-2180K	304.00
27	C	30.0	38.7	22.0	50.0	310g	-2190K	316.00
28	C	30.0	40.0	22.0	50.0	230g	-2200K	327.00
30	C	30.0	42.0	22.0	50.0	230g	-2220K	350.00
32	C	30.0	44.0	28.0	50.0	250g	-2230K	357.00
36	C	30.0	49.0	28.0	50.0	250g	-2250K	391.00

Impact Socket Sets

The sockets are manufactured from the highest quality chrome molybdenum steel which is clearly laser etched with the size for easy and rapid identification. Tough, impact-resistant carry case. Conforms to: **Metric DIN 3129, Inch SAE USA Federal Standard GGG-W-660A**.

9 Piece Set - Metric



Standard length: 10, 12, 13, 14, 17, 19, 24, 27 and 30mm.

**9
PIECES**



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
9	1.70kg	-9870K	1867.00



1/2" Drive Inch Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A**.

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/8"	A	22.0	16.0	12.0	38.0	70g	-2270K	226.00
7/16"	A	22.0	18.0	12.0	38.0	70g	-2280K	226.00
1/2"	A	22.0	20.0	12.0	38.0	70g	-2290K	226.00
9/16"	A	24.0	22.0	12.0	38.0	80g	-2300K	226.00
5/8"	B	25.0	25.0	12.0	38.0	85g	-2320K	226.00
11/16"	B	26.0	26.0	13.0	38.0	90g	-2330K	226.00
3/4"	B	28.0	28.0	13.0	38.0	100g	-2340K	226.00
13/16"	B	30.0	30.0	13.0	38.0	125g	-2350K	226.00
7/8"	B	32.0	32.0	13.0	38.0	150g	-2360K	231.00
15/16"	B	34.0	34.0	13.0	38.0	170g	-2370K	231.00
1"	B	36.0	36.0	14.0	38.0	190g	-2380K	242.00
1 1/16"	B	38.0	38.0	16.0	40.0	205g	-2390K	242.00
1 1/8"	C	38.0	40.0	16.0	40.0	235g	-2400K	254.00
1 3/16"	C	38.0	42.0	16.0	40.0	255g	-2410K	266.00
1 1/4"	C	38.0	44.0	18.0	40.0	270g	-2420K	278.00



1/2" Drive BSW Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A**.

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
5/16"	A	30.0	25.0	12.0	38	140g	-2510K	565.00
3/8"	A	30.0	27.5	13.0	38	140g	-2520K	565.00
7/16"	B	30.0	30.0	13.0	38	140g	-2530K	860.00
1/2"	C	30.0	35.0	20.0	45	190g	-2540K	860.00
9/16"	C	30.0	38.0	22.0	50	210g	-2550K	860.00
5/8"	C	30.0	40.0	22.0	50	305g	-2560K	860.00
11/16"	C	30.0	44.0	28.0	50	305g	-2570K	860.00
3/4"	C	30.0	44.0	28.0	50	305g	-2580K	860.00

18 Piece Set - Metric



Standard length: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 26, 27, 30 and 32mm.

**18
PIECES**



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
18	3.40kg	-9860K	3693.00

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.



1/2" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
1/2" x 3/8"	70g	-7410K	210.00
3/8" x 1/2"	70g	-7420K	217.00
3/4" x 1/2"	175g	-7430K	305.00
1/2" x 3/4"	335g	-7440K	604.00




Universal Ball Joint

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
1/2" x 1/2"	140g	-7840K	434.00



1/2" Drive Metric, Deep Length, 6-Point Conform to: DIN 3129.



Style A



Style B



Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
10	A	25.0	17.5	14.0	78.0	170g	-2600K	260.00
11	A	25.0	18.7	14.0	78.0	170g	-2610K	260.00
12	A	25.0	20.0	14.0	78.0	175g	-2620K	260.00
13	A	25.0	21.0	14.0	78.0	180g	-2630K	290.00
14	A	25.0	22.5	17.0	78.0	210g	-2640K	268.00
15	A	30.0	23.7	17.0	78.0	200g	-2650K	287.00
16	A	30.0	25.0	17.0	78.0	200g	-2660K	287.00
17	A	30.0	26.0	17.0	78.0	260g	-2670K	318.00
18	A	30.0	27.5	17.0	78.0	270g	-2680K	318.00
19	A	30.0	28.7	19.0	78.0	260g	-2690K	297.00
21	B	30.0	30.0	24.0	78.0	260g	-2700K	307.00
22	C	30.0	32.0	24.0	78.0	290g	-2710K	321.00
23	C	30.0	32.0	24.0	78.0	290g	-2720K	346.00
24	C	30.0	35.0	24.0	78.0	290g	-2730K	374.00
27	C	30.0	38.7	54.0	78.0	330g	-2740K	398.00
28	C	30.0	40.0	54.0	78.0	350g	-2750K	431.00
30	C	30.0	42.0	54.0	78.0	450g	-2760K	471.00
32	C	30.0	44.0	54.0	78.0	370g	-2770K	487.00

1/2" Drive Extension Bars

Length (mm)	Weight each	Order Code KEN-583	Price/1 TB
125 (5")	230g	-7520K	343.00
150 (6")	270g	-7530K	385.00
250 (10")	445g	-7540K	674.00
300 (12")	620g	-7550K	863.00
380 (15")	740g	-7560K	1048.00



Hub Nut Impact Socket Set - 7 Piece

These extra deep sockets are six point single hexagon with a black oxidised finish and conform to **DIN 3129, Inch SAE and USA Federal Standard GGG-W-660A.**

Impact resistant storage case.

Socket sizes:
29, 30, 32, 34,
35, 36 and 38mm.



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
7	5.3kg	-9888K	4448.00

1/2" Drive Inch Size, Deep Length, 6-Point Conform to: SAE, USA Federal Standard GGG-W-660A.


Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/8"	A	22.0	16.0	14.0	78.0	140g	-2780K	213.00
7/16"	A	22.0	18.0	14.0	78.0	160g	-2790K	213.00
1/2"	A	22.0	20.0	14.0	78.0	200g	-2800K	213.00
9/16"	A	24.0	22.0	17.0	78.0	180g	-2810K	213.00
5/8"	B	24.0	24.0	17.0	78.0	210g	-2820K	213.00
11/16"	B	26.0	26.0	17.0	78.0	190g	-2830K	213.00
3/4"	B	28.0	28.0	19.0	78.0	235g	-2840K	213.00
13/16"	B	30.0	30.0	24.0	78.0	260g	-2850K	233.00
7/8"	B	32.0	32.0	24.0	78.0	290g	-2860K	233.00
15/16"	B	34.0	34.0	24.0	78.0	340g	-2870K	252.00
1"	B	36.0	36.0	24.0	78.0	340g	-2880K	302.00
1 1/16"	B	38.0	38.0	24.0	78.0	440g	-2890K	782.00
1 1/8"	C	38.0	40.0	54.0	78.0	410g	-2900K	782.00

1/2" Drive BSW Size, Deep Length, 6-Point Conform to: SAE, USA Federal Standard GGG-W-660A.

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
5/16"	A	30.0	25.0	17.0	78	200g	-2910K	969.00
3/8"	A	30.0	27.5	17.0	78	250g	-2920K	969.00
7/16"	B	30.0	30.0	24.0	78	300g	-2930K	969.00
1/2"	C	30.0	35.0	24.0	78	360g	-2940K	969.00
9/16"	C	30.0	38.7	54.0	78	440g	-2950K	969.00
5/8"	C	30.0	40.0	54.0	78	480g	-2960K	969.00
11/16"	C	30.0	44.0	54.0	78	500g	-2970K	1512.00
3/4"	C	30.0	44.0	54.0	78	450g	-2980K	1374.00

7 Piece Set - Deep Metric

10, 13, 14, 17, 19, 24
and 30mm.

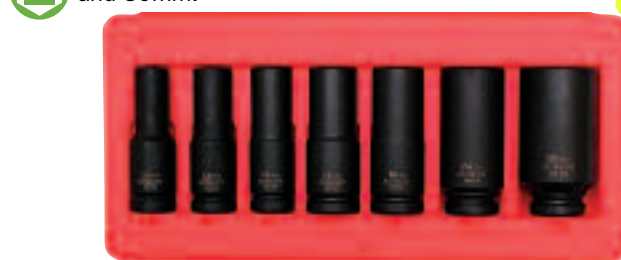

Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
7	2.20kg	-9880K	2289.00



Impact Wheel Nut Sockets

Socket sizes: 17, 19 and 21mm.
Colour coded for easy identification.
Can be used with retainer rings or pins.



Size (mm)	Overall Length	Weight each	Order Code KEN-583	Price/1 TB
17	85mm	225g	-3080K	508.00
19	85mm	225g	-3082K	508.00
21	85mm	255g	-3084K	508.00

3 Piece Set

Contains one of each size 17, 19 and 21mm.



**3
PIECES**



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
3	895g	-9886K	1582.00

Impact Hexagon Bit Drivers

Hexagon sizes: 6, 7, 8, 10, 12, 14, 15, 17, 18 and 19mm.



Size (mm)	Overall Length	Weight each	Order Code KEN-583	Price/1 TB
6	75mm	95g	-3010K	278.00
7	75mm	95g	-3012K	278.00
8	75mm	105g	-3014K	278.00
10	75mm	120g	-3016K	278.00
12	75mm	130g	-3018K	278.00
14	75mm	150g	-3020K	278.00
15	75mm	155g	-3022K	278.00
17	75mm	175g	-3024K	331.00
18	75mm	195g	-3026K	331.00
19	75mm	200g	-3028K	331.00

10 Piece Set

Contains one of each size 6mm to 19mm as shown left.



**10
PIECES**



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
10	1.76kg	-9882K	3145.00

Impact TX Bit Driver Sockets

TX drivers: T40, T45, T47, T50, T55, T60 and T70.



Size	Overall Length	Weight each	Order Code KEN-583	Price/1 TB
T40	55mm	80g	-3060K	461.00
T45	55mm	80g	-3062K	461.00
T47	55mm	85g	-3064K	461.00
T50	55mm	85g	-3066K	461.00
T55	55mm	90g	-3068K	461.00
T60	55mm	95g	-3070K	461.00
T70	55mm	105g	-3072K	461.00

16 Piece Set Contents:

TX drivers (length 55mm): T40, T45, T47, T50, T55, T60, T70.

TX sockets: E10, E11, E12, E14, E16, E18, E20, E22, E24.
Conform to **DIN 3129**. Supplied in tough, impact-resistant plastic storage case.


**16
PIECES**

Impact TX Sockets

1/2



Size	Overall Length	Weight each	Order Code KEN-583	Price/1 TB
E10	40mm	70g	-3040K	438.00
E11	40mm	70g	-3042K	438.00
E12	40mm	70g	-3044K	438.00
E14	45mm	75g	-3046K	438.00
E16	45mm	75g	-3048K	438.00
E18	45mm	75g	-3050K	438.00
E20	45mm	115g	-3052K	438.00
E22	45mm	140g	-3054K	461.00
E24	45mm	145g	-3056K	461.00

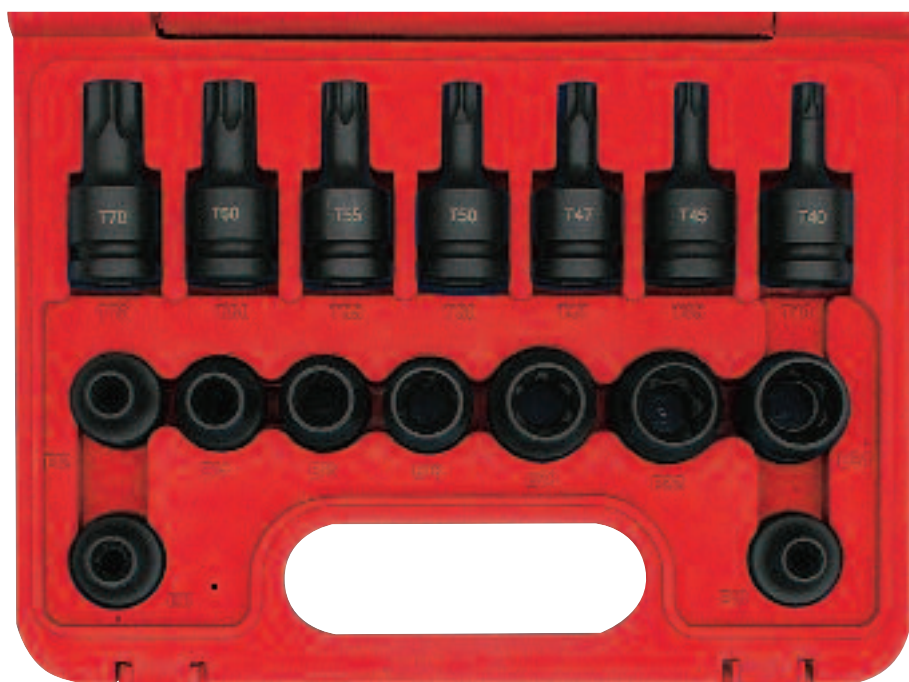

Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
16	1.91kg	-9884K	5825.00




**Chrome Molybdenum
Impact Sockets**

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.



3/4" Drive Metric, Standard Length, 6-Point

Conform to: **DIN 3129.**

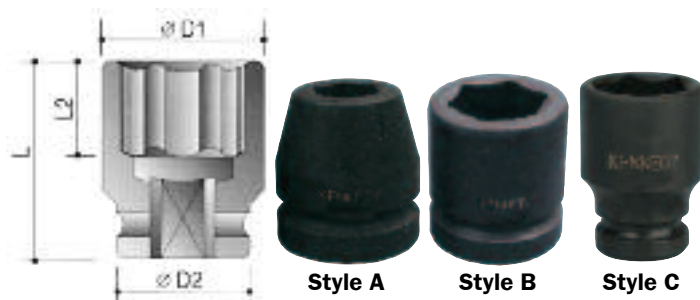


Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
16	A	44.0	27.0	12.0	50.0	350g	-3090K	579.00
17	A	44.0	31.0	12.0	50.0	405g	-3100K	579.00
18	A	44.0	32.0	12.0	50.0	400g	-3110K	579.00
19	A	44.0	33.0	14.0	50.0	405g	-3120K	579.00
20	A	44.0	34.0	16.0	50.0	400g	-3130K	589.00
21	A	44.0	35.0	16.0	50.0	415g	-3140K	579.00
22	A	44.0	37.0	16.0	50.0	410g	-3150K	579.00
23	A	44.0	38.0	16.0	50.0	410g	-3160K	589.00
24	A	44.0	39.0	16.0	50.0	415g	-3170K	579.00
25	A	44.0	40.0	16.0	50.0	400g	-3180K	579.00
26	A	44.0	41.0	16.0	50.0	400g	-3190K	579.00
27	A	44.0	43.0	16.0	54.0	435g	-3200K	579.00
28	B	44.0	44.0	23.0	54.0	400g	-3210K	579.00
29	C	44.0	45.0	23.0	54.0	410g	-3220K	605.00
30	C	44.0	47.0	23.0	54.0	440g	-3230K	579.00
32	C	44.0	49.0	23.0	56.0	470g	-3240K	588.00
33	C	44.0	51.0	23.0	56.0	510g	-3250K	668.00
34	C	44.0	52.0	23.0	56.0	515g	-3260K	668.00
35	C	44.0	53.0	23.0	56.0	515g	-3270K	668.00
36	C	44.0	54.0	23.0	56.0	520g	-3280K	668.00
38	C	44.0	57.0	24.0	58.0	590g	-3300K	638.00
41	C	44.0	60.0	24.0	58.0	630g	-3310K	758.00
42	C	44.0	62.0	24.0	58.0	650g	-3320K	809.00
46	C	44.0	67.0	27.0	63.0	655g	-3330K	990.00
47	C	44.0	68.0	32.0	68.0	1150g	-3340K	1014.00
50	C	44.0	71.0	35.0	72.0	1200g	-3350K	1277.00



3/4" Drive Metric, Deep Length, 6-Point

Conform to: **DIN 3129.**

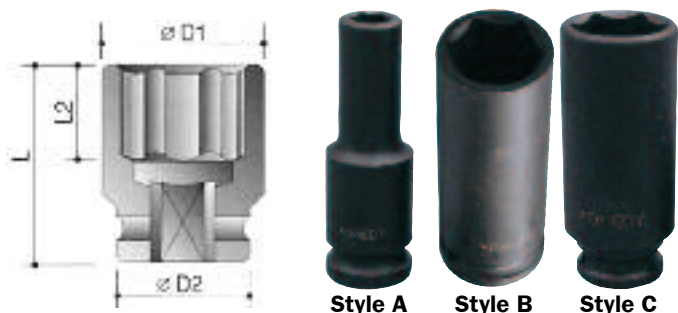

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
17	A	44.0	31.0	20.0	95.0	605g	-3810K	899.00
18	A	44.0	32.0	20.0	95.0	610g	-3820K	899.00
19	A	44.0	33.0	23.0	95.0	625g	-3830K	899.00
21	A	44.0	35.0	23.0	95.0	630g	-3850K	899.00
22	A	44.0	37.0	23.0	95.0	650g	-3860K	899.00
24	A	44.0	39.0	51.0	95.0	660g	-3880K	899.00
25	A	44.0	40.0	51.0	95.0	735g	-3890K	900.00
26	A	44.0	41.0	51.0	95.0	420g	-3900K	900.00
27	A	44.0	43.0	62.0	95.0	420g	-3910K	899.00
28	B	44.0	44.0	62.0	95.0	450g	-3920K	900.00
30	C	44.0	47.0	62.0	95.0	750g	-3940K	899.00
32	C	44.0	49.0	62.0	95.0	860g	-3960K	899.00
33	C	44.0	51.0	62.0	95.0	850g	-3970K	1033.00
34	C	44.0	52.0	62.0	95.0	850g	-3980K	900.00
36	C	44.0	54.0	62.0	95.0	880g	-4000K	982.00
38	C	44.0	57.0	60.0	95.0	930g	-4020K	1152.00
41	C	44.0	60.0	60.0	95.0	1100g	-4050K	1161.00
42	C	44.0	62.0	60.0	95.0	1150g	-4060K	1897.00
46	C	44.0	67.0	58.0	95.0	1200g	-4100K	1880.00
47	C	44.0	68.0	58.0	95.0	1300g	-4110K	2004.00



3/4" Drive Inch Size, Standard Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
5/8"	A	38.0	27.5	12.0	50	250g	-3360K	406.00
11/16"	A	38.0	29.0	12.0	50	250g	-3370K	406.00
3/4"	A	38.0	30.0	14.0	50	240g	-3380K	406.00
13/16"	A	38.0	32.0	16.0	52	250g	-3390K	406.00
7/8"	A	38.0	34.0	16.0	52	265g	-3400K	406.00
15/16"	A	38.0	36.0	16.0	52	270g	-3410K	406.00
1"	C	38.0	40.0	16.0	52	300g	-3420K	406.00
1 1/16"	C	38.0	40.0	16.0	52	285g	-3430K	438.00
1 1/8"	B	42.0	42.0	20.0	52	300g	-3440K	438.00
1 3/16"	B	44.0	44.0	20.0	52	390g	-3450K	438.00
1 1/4"	B	44.0	44.0	20.0	52	370g	-3460K	438.00
1 5/16"	C	44.0	47.0	23.0	56	415g	-3470K	438.00
1 3/8"	C	44.0	50.0	23.0	56	470g	-3480K	438.00
1 7/16"	C	44.0	51.0	23.0	56	475g	-3490K	438.00
1 1/2"	C	44.0	53.0	23.0	56	635g	-3500K	781.00
1 5/8"	C	44.0	58.0	27.0	62	610g	-3520K	781.00
1 11/16"	C	44.0	63.5	27.0	62	630g	-3530K	781.00
1 3/4"	C	44.0	65.0	27.0	62	770g	-3540K	781.00
1 13/16"	C	44.0	67.0	32.0	68	795g	-3550K	781.00
1 7/8"	C	44.0	68.0	32.0	68	940g	-3560K	781.00



3/4" Drive BSW Size, Standard Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
9/16"	A	44.0	41.0	16.0	50	300g	-3620K	1166.00
11/16"	C	44.0	49.0	23.0	56	350g	-3640K	1166.00
3/4"	C	44.0	51.0	23.0	56	490g	-3650K	1166.00
7/8"	C	44.0	57.0	24.0	58	630g	-3670K	2279.00
1"	C	44.0	62.0	24.0	58	300g	-3690K	2279.00
1 1/8"	C	44.0	68.0	32.0	68	335g	-3710K	2279.00
1 1/4"	C	44.0	71.0	35.0	72	1200g	-3720K	2279.00



3/4" Drive Inch Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/4"	A	38.0	30.0	23.0	85.0	400g	-4160K	2004.00
7/8"	A	38.0	34.0	23.0	85.0	430g	-4180K	2004.00
15/16"	A	38.0	36.0	41.0	85.0	425g	-4190K	2004.00
1"	C	38.0	40.0	41.0	85.0	425g	-4200K	2004.00
1 1/16"	C	38.0	40.0	52.0	85.0	425g	-4210K	2004.00
1 1/8"	B	42.0	42.0	52.0	85.0	520g	-4220K	2205.00
1 3/16"	B	44.0	44.0	52.0	85.0	520g	-4230K	2004.00
1 1/4"	C	44.0	49.0	52.0	85.0	530g	-4240K	2004.00
1 5/16"	C	44.0	50.0	52.0	85.0	595g	-4250K	2205.00
1 7/16"	C	44.0	51.0	52.0	85.0	600g	-4270K	2004.00
1 1/2"	C	44.0	57.0	60.0	95.0	700g	-4280K	2004.00
1 7/8"	C	44.0	68.0	58.0	95.0	800g	-4340K	2004.00



3/4" Drive BSW Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/4"	C	44.0	51.0	62.0	95	440g	-4450K	2019.00
13/16"	C	44.0	54.0	62.0	95	450g	-4460K	2215.00
7/8"	C	44.0	57.0	60.0	95	500g	-4470K	2318.00



**Chrome Molybdenum
Impact Sockets**

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.



3/4" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
3/4" x 1/2"	175g	-7430K	305.00
1/2" x 3/4"	335g	-7440K	604.00
1" x 3/4"	175g	-7450K	663.00



Universal Ball Joint

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
3/4" x 3/4"	640g	-7860K	1131.00




Retaining Rings
Supplied with pins



To Suit Outside Dia.	Square Drive	Weight each	Order Code KEN-583	Price/1 TB
38 - 44mm	3/4"	8g	-8200K	70.00
48 - 54mm	3/4"	16g	-8210K	100.00
46 - 58mm	1"	16g	-8300K	106.00
62mm	1"	18g	-8310K	147.00
78 - 86mm	1"	31g	-8320K	183.00



1" Drive Metric, Standard Length, 6-Point
Conform to: **DIN 3129**.



**EXTENDED
RANGE**

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
21	A	54.0	37.5	17.0	58.0	675g	-5050K	853.00
22	A	54.0	40.0	17.0	58.0	790g	-5060K	853.00
24	A	54.0	42.0	17.0	58.0	680g	-5080K	853.00
25	A	54.0	43.0	17.0	58.0	670g	-5090K	853.00
26	A	54.0	44.5	17.0	58.0	660g	-5100K	853.00
27	A	54.0	46.0	17.0	58.0	695g	-5110K	853.00
28	A	54.0	47.0	17.0	58.0	670g	-5120K	853.00
29	A	54.0	48.0	19.0	60.0	725g	-5130K	853.00
30	A	54.0	50.0	21.0	60.0	730g	-5140K	853.00
32	A	54.0	52.0	21.0	60.0	715g	-5160K	853.00
33	A	54.0	53.0	21.0	60.0	715g	-5170K	853.00
34	B	54.0	55.0	21.0	62.0	720g	-5180K	853.00
35	B	54.0	55.0	21.0	62.0	740g	-5190K	853.00
36	B	54.0	56.0	30.0	65.0	740g	-5200K	853.00
37	B	54.0	59.0	30.0	65.0	720g	-5210K	1203.00
38	B	54.0	59.0	30.0	65.0	780g	-5220K	880.00
41	B	54.0	63.0	31.0	67.0	900g	-5250K	935.00
42	B	54.0	64.0	36.0	74.0	1100g	-5260K	1203.00
46	B	54.0	69.0	36.0	74.0	1050g	-5290K	1203.00
47	B	54.0	72.0	36.0	74.0	1000g	-5300K	1203.00
48	B	54.0	73.0	36.0	74.0	1000g	-5310K	1203.00
50	B	54.0	74.0	42.0	80.0	1300g	-5330K	1203.00
52	B	54.0	77.0	44.0	84.0	1500g	-5350K	1203.00
55	B	54.0	80.0	44.0	84.0	1600g	-5380K	1763.00
56	B	54.0	81.0	44.0	84.0	1750g	-5390K	1324.00
60	B	54.0	86.0	44.0	87.0	1800g	-5430K	2174.00
65	B	54.0	92.0	46.0	90.0	2100g	-5460K	2614.00
70	B	54.0	99.0	51.0	96.0	2400g	-5480K	2789.00
75	B	86.0	104.0	52.0	98.0	3500g	-5500K	3766.00
80	B	86.0	109.0	52.0	100.0	3700g	-5520K	3976.00
85	B	86.0	115.0	52.0	100.0	3800g	-5530K	2974.00
90	B	86.0	119.0	55.0	105.0	3800g	-5550K	4151.00
95	B	86.0	130.0	55.0	105.0	3900g	-5570K	4329.00
100	B	86.0	140.0	55.0	105.0	3900g	-5580K	9759.00

7 Piece Set - Metric

Standard length:
19, 24, 27, 30,
32, 36 and
46mm.



**7
PIECES**



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
7	4.20kg	-9890K	4607.00



3/4" Drive Extension Bars



Length (mm)	Weight each	Order Code KEN-583	Price/1 TB
100 (4")	470g	-7570K	861.00
150 (6")	810g	-7580K	1010.00
230 (9")	900g	-7600K	1156.00
250 (10")	1350g	-7610K	1332.00
300 (12")	1500g	-7620K	1359.00
400 (15 3/4")	1900g	-7640K	1645.00



1" Drive Inch Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A**.

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
7/8"	A	51.0	39.0	17.0	58.0	700g	-5610K	1085.00
15/16"	A	51.0	40.0	17.0	58.0	505g	-5620K	1085.00
1"	A	51.0	42.0	17.0	58.0	680g	-5630K	1085.00
1 1/16"	A	51.0	44.0	17.0	58.0	710g	-5640K	1085.00
1 1/8"	A	51.0	46.0	19.0	58.0	550g	-5650K	1085.00
1 3/16"	A	51.0	48.0	21.0	60.0	550g	-5660K	1085.00
1 1/4"	B	51.0	51.0	21.0	60.0	570g	-5670K	1085.00
1 5/16"	C	52.0	53.0	21.0	62.0	680g	-5680K	1085.00
1 7/16"	C	52.0	56.0	26.0	62.0	680g	-5700K	1085.00
1 1/2"	C	52.0	58.0	26.0	62.0	700g	-5710K	1085.00
1 9/16"	C	52.0	58.0	26.0	62.0	680g	-5720K	1427.00
1 5/8"	C	52.0	61.5	26.0	62.0	680g	-5730K	1434.00
1 11/16"	C	52.0	65.0	27.0	64.0	1100g	-5740K	1434.00
1 3/4"	C	58.0	66.0	27.0	64.0	1000g	-5750K	1434.00
1 13/16"	C	58.0	68.0	27.0	64.0	1000g	-5760K	1434.00
1 7/8"	C	58.0	70.0	28.0	66.0	1500g	-5770K	1434.00
2"	C	58.0	74.0	31.0	70.0	1700g	-5790K	1434.00
2 1/16"	C	58.0	75.0	31.0	70.0	1200g	-5800K	1579.00
2 1/8"	C	58.0	78.0	31.0	70.0	1400g	-5810K	1579.00
2 3/16"	C	62.0	80.0	32.0	72.0	1600g	-5820K	1436.00
2 1/4"	C	62.0	84.0	34.0	75.0	1600g	-5830K	1579.00
2 3/8"	C	62.0	87.0	35.0	78.0	1700g	-5850K	1579.00
2 1/2"	C	62.0	91.0	36.0	80.0	1900g	-5870K	1738.00
2 9/16"	C	62.0	93.0	36.0	80.0	1900g	-5880K	1738.00
2 5/8"	C	62.0	95.0	38.0	82.0	1900g	-5890K	1738.00
2 3/4"	C	62.0	98.0	40.0	85.0	2000g	-5910K	1738.00
2 13/16"	C	62.0	100.0	40.0	87.0	2100g	-5920K	1738.00
3"	C	86.0	106.0	52.0	98.0	2300g	-5950K	7434.00
3 1/8"	C	86.0	109.0	52.0	100.0	3700g	-5970K	7434.00
3 1/2"	C	86.0	125.0	52.0	105.0	3800g	-6000K	7434.00



1" Drive BSW Size, Standard Length, 6-Point
Conform to: **SAE, USA Federal Standard GGG-W-660A**.

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
1 1/16"	A	54.0	52.0	21.0	60	900g	-6080K	7434.00
3/4"	B	54.0	55.0	21.0	62	700g	-6090K	1030.00
13/16"	B	54.0	56.0	30.0	65	700g	-6100K	1133.00
1"	B	54.0	64.0	36.0	74	700g	-6130K	1308.00
1 1/8"	B	54.0	73.0	36.0	74	800g	-6140K	1427.00
1 1/4"	B	54.0	77.0	44.0	84	1500g	-6150K	1803.00
1 1/2"	B	54.0	86.0	44.0	87	1800g	-6170K	2189.00



IMPACT SOCKETS - 1" & 1 1/2" SQUARE DRIVE




Chrome Molybdenum Impact Sockets & Accessories

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

1" Drive Metric, Deep Length, 6-Point

Conform to: **DIN 3129.**

**EXTENDED
RANGE**



Style A Style B Style C

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
23	A	54.0	41.0	21.0	100.0	1100g	-6250K	1251.00
24	A	54.0	42.0	21.0	100.0	1100g	-6260K	1251.00
27	A	54.0	46.0	23.0	100.0	1200g	-6290K	1251.00
28	A	54.0	47.0	23.0	100.0	1200g	-6300K	1251.00
30	A	54.0	50.0	50.0	100.0	1200g	-6320K	1251.00
32	A	54.0	52.0	50.0	100.0	1200g	-6340K	1251.00
33	A	54.0	53.0	50.0	100.0	1200g	-6350K	1251.00
34	B	54.0	55.0	50.0	100.0	1200g	-6360K	1252.00
36	B	54.0	56.0	64.0	100.0	1200g	-6380K	1251.00
37	B	54.0	57.0	64.0	100.0	1250g	-6390K	1388.00
38	B	54.0	59.0	64.0	100.0	1300g	-6400K	1388.00
41	B	54.0	63.0	64.0	100.0	1300g	-6430K	1388.00
42	B	54.0	64.0	64.0	100.0	1300g	-6440K	1388.00
46	B	54.0	69.0	62.0	100.0	1500g	-6480K	1574.00
50	B	54.0	74.0	62.0	100.0	1600g	-6520K	3097.00
52	B	54.0	77.0	60.0	100.0	1600g	-6540K	3097.00
55	B	54.0	80.0	60.0	100.0	2600g	-6570K	5515.00
56	B	54.0	81.0	65.0	105.0	2600g	-6580K	5515.00
60	B	54.0	86.0	77.0	120.0	2600g	-6630K	5515.00
65	B	54.0	92.0	80.0	125.0	2600g	-6660K	5515.00
70	B	54.0	99.0	80.0	125.0	2700g	-6680K	5515.00
75	B	86.0	109.0	87.0	135.0	2700g	-6700K	6638.00
80	B	86.0	109.0	87.0	135.0	2800g	-6720K	7231.00

Universal Ball Joint



Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
1" x 1"	640g	-7880K	2407.00

1" Drive Reducers & Adaptors

Male Drive x Female Drive	Weight each	Order Code KEN-583	Price/1 TB
3/4" x 1"	335g	-7460K	818.00
1 1/2" x 1"	670g	-7480K	1663.00

1" Drive Extension Bars

Length (mm)	Weight each	Order Code KEN-583	Price/1 TB
100 (4")	590g	-7650K	1205.00
150 (6")	610g	-7660K	1477.00
200 (8")	1000g	-7680K	2610.00
250 (10")	2100g	-7690K	1879.00
300 (12")	2500g	-7700K	1847.00
380 (15")	2600g	-7720K	2019.00

1" Drive Inch Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
1"	A	54.0	42.0	21.0	100.0	1100g	-6760K	1545.00
1 1/16"	A	84.0	46.0	23.0	100.0	1200g	-6770K	1700.00
1 1/8"	A	54.0	46.0	23.0	100.0	1200g	-6780K	1771.00
1 3/16"	A	51.0	48.0	40.0	90.0	1200g	-6790K	1771.00
1 1/4"	B	51.0	51.0	40.0	90.0	1200g	-6800K	1771.00
1 5/16"	C	52.0	53.0	40.0	90.0	1000g	-6810K	1862.00
1 3/8"	C	52.0	54.0	40.0	90.0	1000g	-6820K	1862.00
1 1/2"	C	52.0	58.0	54.0	92.0	1000g	-6840K	1862.00
1 9/16"	C	52.0	60.0	54.0	92.0	1000g	-6850K	1906.00
1 5/8"	C	52.0	61.5	54.0	92.0	1000g	-6860K	1918.00
1 11/16"	C	52.0	65.0	54.0	92.0	1000g	-6870K	2090.00
1 3/4"	C	58.0	66.0	54.0	92.0	1000g	-6880K	2269.00
1 13/16"	C	58.0	68.0	54.0	92.0	1000g	-6890K	2966.00
1 7/8"	C	58.0	70.0	54.0	92.0	1000g	-6900K	2393.00
1 15/16"	B	54.0	74.0	52.0	100.0	1000g	-6910K	2833.00
2"	C	58.0	74.0	54.0	95.0	2400g	-6920K	3348.00
2 1/16"	C	58.0	75.0	54.0	95.0	1580g	-6930K	3430.00
2 1/8"	C	58.0	78.0	60.0	100.0	1790g	-6940K	3502.00
2 3/16"	C	62.0	80.0	60.0	100.0	2400g	-6950K	3605.00
2 1/4"	C	62.0	84.0	60.0	100.0	2070g	-6960K	3749.00
2 5/16"	C	62.0	86.0	62.0	105.0	2400g	-6970K	3863.00
2 3/8"	C	62.0	87.0	62.0	105.0	2400g	-6980K	4280.00
2 7/16"	C	62.0	89.0	67.0	110.0	2600g	-6990K	4378.00
2 1/2"	C	62.0	91.0	67.0	110.0	2600g	-7000K	4635.00
2 5/8"	C	62.0	95.0	75.0	120.0	3020g	-7020K	4790.00
2 3/4"	C	62.0	98.0	78.0	124.0	3060g	-7040K	4893.00
2 7/8"	C	62.0	102.0	80.0	128.0	2900g	-7060K	5099.00
2 15/16"	C	86.0	104.0	85.0	135.0	3000g	-7070K	5150.00
3"	C	86.0	106.0	85.0	135.0	3000g	-7080K	5408.00
3 1/8"	B	86.0	109.0	87.0	135.0	3000g	-7100K	5665.00

1" Drive BSW Size, Deep Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 TB
		D2	D1	L2	L			
3/4"	A	54.0	53.0	50.0	100	1500g	-7150K	5923.00
1 3/8"	B	54.0	81.0	65.0	105	1500g	-7220K	9270.00
1 1/2"	B	54.0	86.0	77.0	120	2000g	-7230K	9528.00
1 3/4"	B	54.0	99.0	80.0	155	2500g	-7250K	9785.00

7 Piece Impact Socket Set

Socket sizes:
27, 30, 32, 33,
36, 41 and 46mm.



Number of Pieces	Weight each	Order Code KEN-583	Price/1 TB
7	5.95kg	-9920K	10038.00

1 1/2" Drive Metric Size, Standard Length, 6-Point

Conform to: **SAE, USA Federal Standard GGG-W-660A.**

Socket (mm)	Style	Dimensions (mm)				Order Code KEN-583	Price/1 TB
		D2	D1	L2	L		
30		54.0	56.0	21.0	78.0	-8430K	3868.00
32		86.0	58.0	22.0	78.0	-8432K	3868.00
33		86.0	60.0	22.0	78.0	-8433K	3868.00
36		86.0	64.0	24.0	78.0	-8436K	3868.00
38		86.0	66.0	26.0	80.0	-8438K	3868.00
41		86.0	70.0	28.0	80.0	-8441K	3868.00
46		86.0	76.0	30.0	84.0	-8446K	3868.00
48		86.0	79.0	32.0	87.0	-8448K	3868.00
50		86.0	81.0	32.0	87.0	-8450K	3868.00
52		86.0	83.0	34.0	87.0	-8452K	3868.00
55		86.0	87.0	37.0	90.0	-8455K	3868.00
56		86.0	88.0	37.0	92.0	-8456K	3868.00
60		86.0	94.0	39.0	95.0	-8460K	4898.00
65		86.0	100.0	42.0	100.0	-8465K	5670.00
70		86.0	106.0	46.0	105.0	-8470K	6134.00
75		86.0	112.0	49.0	108.0	-8475K	7730.00
80		86.0	119.0	53.0	115.0	-8480K	9275.00
85		86.0	125.0	56.0	118.0	-8485K	10305.00
95		95.0	137.0	61.0	123.0	-8495K	12880.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR