Heavy Duty Adjustable Twin Roller Stand

Ideal for supporting long and heavy duty pipe and timber. Adjustable feet. Lock-knob to securely lock-in height settings. Cast iron base with levelling pads for stability.
Adjustable height 29” (736mm) to 43” (1092mm),
1⅜” (35mm) diameter x 6” (150mm) width with spring-loaded axle.
Adjustable roller stands with double rollers forming vee groove for added stability allowing easy rotation and feed of up to 7” (180mm) diameter pipe or timber.

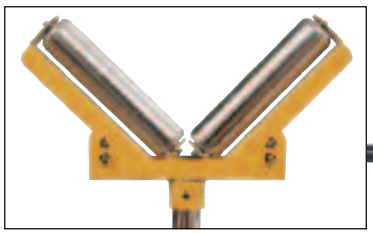

Type	Weight each	Order Code KEN-588	Price/1 TB
Adjustable Twin	6.20kg	-9030K	4584.00

Heavy Duty Self-Levelling Single Roller Stand

HRS020
Heavy duty all-steel welded construction. Unique levelling pads for uneven floors.
Adequately supports up to 100kg.
Legs fold flat for easy storage and transportation. Pre-assembled and ready to use.
Height adjustment from 758 to 1197mm.
Bearing roller: 51mm x 284mm.

Type	Weight each	Order Code KEN-588	Price/1 TB
Self-Levelling	8.00kg	-9020K	5040.00

Fibre Grips

Fibre-faced aluminium vice jaws for use with copper, aluminium, brass and wooden workpieces to prevent marking of work surface. Supplied in pairs.

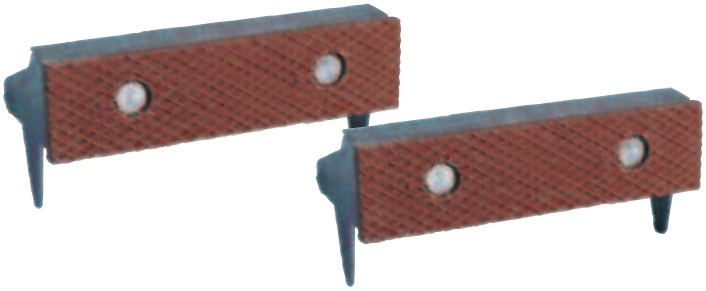

Width (mm)	Weight each	Order Code KEN-589	Price/Pr TB
76 (3”)	165g	-0300K	314.00
90 (3½”)	180g	-0350K	450.00
100 (4”)	180g	-0400K	460.00
110 (4½”)	230g	-0420K	470.00
115 (4½”)	245g	-0450K	479.00
127 (5”)	245g	-0500K	509.00
133 (5¼”)	260g	-0520K	539.00
150 (6”)	280g	-0600K	799.00

Magnetic Vice Jaws

Suitable for all steel and iron vices - engineers, fitters, machine. Quick and easy to fit and remove.

Profiled Aluminium

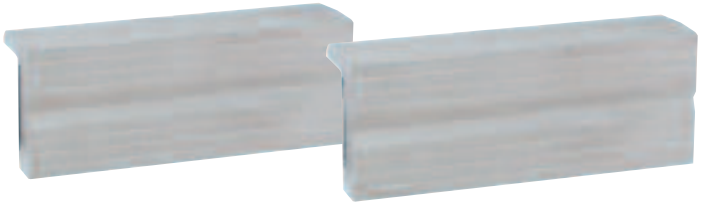

Width (mm)	Weight each	Order Code KEN-589	Price/Pr TB
75 (3”)	125g	-1300K	657.00
100 (4”)	165g	-1400K	864.00
125 (5”)	210g	-1500K	864.00
150 (6”)	250g	-1600K	906.00

Aluminium Jaw with a Fibre Face

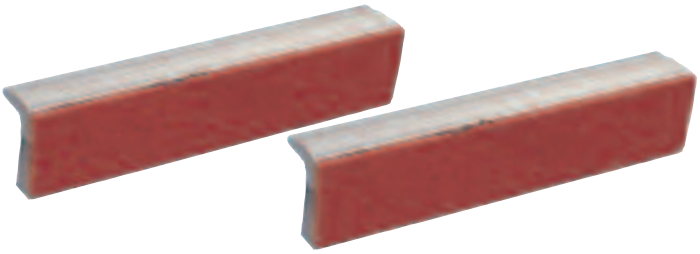

Width (mm)	Weight each	Order Code KEN-589	Price/Pr TB
75 (3”)	115g	-2300K	885.00
100 (4”)	160g	-2400K	1034.00
125 (5”)	195g	-2500K	1101.00
150 (6”)	235g	-2600K	1113.00

Aluminium Jaw with a Rubber Face

Width (mm)	Weight each	Order Code KEN-589	Price/Pr TB
75 (3”)	120g	-3300K	864.00
100 (4”)	160g	-3400K	1034.00
125 (5”)	210g	-3500K	1073.00
150 (6”)	250g	-3600K	1131.00

© 2014