




**Protective Coating
Red-Hot-Dip**

Hot dip strippable plastic coating moulds itself around the component or tool being coated to provide 100% coverage and protects against corrosion and impacts, for up to ten years. The component protected can be easily identified through the translucent coating. Simply removed by peeling it off, leaves behind a thin oil film to provide short term protection against corrosion. The removed protective dip can be reused. Never directly apply heat to melt the protective dip, always use with a suitable melting pot. Working temperature 130°C to 160°C (for optimum results 140°C to 145°C).

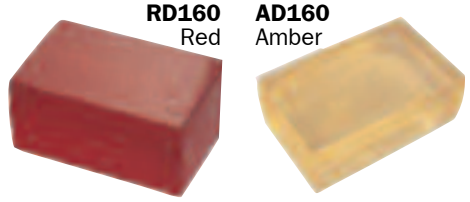

Description (Bars)	Weight each	Order Code KEN-708	Price/1 TB
RD160 Single Bar	0.50kg	-0050K	438.00
RD160 Case (50)	25.00kg	-0250K	18720.00
AD160 Single Bar	0.50kg	-0500K	438.00
AD160 Case (50)	25.00kg	-0550K	18720.00

Industrial Melting Pots

A range of melting pots which have been designed for industrial melting of waxes, glues and plastics etc. for coating, casting, protecting etc. The pots are electrically heated and thermostatically temperature controlled from 50°C to 200°C. Constructed from anodised aluminium with ceramic fibre insulation. Pots supplied with 2m cable and fused plug, lifting handle, double-wall heat-conserving lid, on/off switch and safety thermal cut-out. 220/240V as standard.



Capacity		Internal Dimensions		Maximum Wattage	Order Code KEN-709	Price/1 TB
Litres	Pints	Diameter	Depth			
0.7	1.20	100mm	90mm	275	-1010K	30076.00
2.5	4.40	150mm	140mm	600	-1030K	40582.00
6.0	10.5	200mm	190mm	1125	-1060K	57142.00
12.0	21.0	250mm	240mm	1650	-1120K	66950.00

P.T.F.E. Tape

Gas Type: 12mm x 5m roll. For gas and hot water pipes (not for potable water). Made to **BS EN 751:3**.

Water Type: 12mm x 12m roll. For hot and cold water pipes. Made to **BS 6920 & BS 7786**.

P.T.F.E. Thread Sealing Tape: 25mm x 12m roll. Made to **EN571**.




Description	Order Code KEN-983	Price/1 TB
Gas	-8000K	45.00
Water	-9000K	29.00
Thread Sealing Tape	-9010K	134.00



Non-Setting Sealant

Gas Seal
Non-setting, off-white compound for use on metallic threaded and face joints carrying gas including aluminium, copper, steel and zinc. Suitable for use with Propane, Butane, LPG and Natural gas. Ideal for boats, camping, motor-homes, caravans, BBQs and most domestic appliances. Full bond strength is achieved immediately dependent upon humidity levels. Can be wiped up with a disposable cloth, any residual excess can be rinsed with water.

Temperature range: -20°C to +125°C. Gas
Maximum gas pressure: 2.9psi (0.2bar)



Size	Order Code SHK-720	Price/1 TB
400g	-4010K	773.00

**400g
TIN**



Silicone Sealants

General-Purpose Silicone

High performance acetoxy silicone provides a permanently watertight flexible seal and offers excellent adhesive properties, making it suitable for use on glass, sanitary-ware, ceramics and non-porous surfaces. For indoor and outdoor use. Weather-proof. Mould-resistant. Life expectancy up to 25 years. Conforms to **BS 5889**.

Size: 310ml cartridge.



Colour	Order Code SHK-716	Price/1 TB
White	-3100K	174.00
Clear	-3110K	174.00
Black	-3130K	174.00
Grey	-3140K	174.00




Sealant Cartridge Applicator Guns

Economy Plastic Gun - C3

Robust, easy to use. Smooth action.

Max. cartridge size: 310ml.

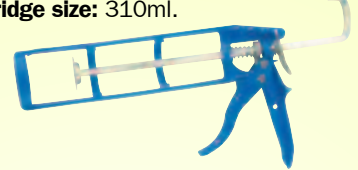

Type	Cartridge (max size)	Order Code KEN-715	Price/1 TB
C3	310ml	-1200K	350.00

Professional Metal Guns

Extremely robust and ideal for continuous use. Will not twist under pressure. Smooth action for optimum application of sealant.




Type	Cartridge (max size)	Order Code KEN-715	Price/1 TB
C3	310ml	-1000K	438.00
C4	400ml	-2000K	592.00

Ergonomic Sealant Applicator Gun

Heavy Duty Metal Gun - C3

Extremely robust and ideal for continuous use. Will not twist under pressure, ergonomically designed to reduce operator fatigue. Smooth action for optimum application of sealant.

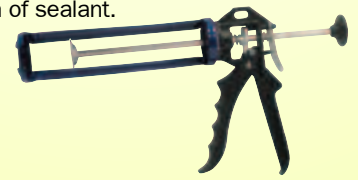

Type	Cartridge (max size)	Order Code KEN-715	Price/1 TB
C3	310ml	-1400K	510.00