

GROUP 727 DEGREASERS / CLEANING BATHS



Just Orange

Citrus-Based Solvent Degreaser

Just Orange is a powerful, citrus-based solvent degreaser for the cleaning and degreasing of engineering components and equipment. Effectively removes heavy oils, greases, bitumen, wet paints, adhesives and sealants from virtually all hard surfaces.

Contains no Chlorinated or Aromatic solvents. For use as an alternative to solvents such as acetone, benzene, butyl cellulose, CFC's, Freon, Methylene Chloride, HCFC's, isopropyl alcohol, methyl ethyl, ketone, mineral spirits, toluene, trichloroethylene, xylene etc.



Size	Order Code	Price/1 TB
1ltr	SOL-727 -2800A	516.00
5ltr	-2810B	1955.00
20ltr	-2820C	7818.00

Orange Plus

Citrus-Based Water Rinseable Degreaser

Orange-Plus is a highly effective, water rinseable solvent degreaser for the removal of stubborn and heavy oils, greases, paints, inks, adhesive and resins from engineering components and equipment. Once cleaned, the contaminants can be rinsed away with water. Suitable for all metals, including plant and machinery, and some plastics.

Contains no Chlorinated or Aromatic solvents. For use as an alternative to solvents such as xylene, toluene, acetone etc.

Not recommended for use with Parts Washers



Size	Order Code	Price/1 TB
5ltr	SOL-727 -2910B	1850.00
20ltr	-2920C	7107.00

Aqueous Orange

Citrus-Based Aqueous Cleaner

Aqueous Orange is highly concentrated, low alkaline blend of citrus solvents and powerful surfactants, designed to remove oils and greases, inks, polishing compounds and lapping slurry from hard surfaces. It can be diluted with water for maximum economy and its micro-emulsion formula offers the

benefits of water-based efficiency with solvent based performance. It also contains a corrosion inhibitor and can be used both manually and in machine operations. Replaces white spirit, paraffin and highly alkaline cleaners.



Size	Order Code	Price/1 TB
5ltr	SOL-727 -2610B	2132.00
20ltr	-2620C	8285.00

Degreasing Station/Parts Washer

Air operated, strong and durable mild steel degreasing station. Ideal for use as a soaking bath and air agitation facility aids the degreasing process by removing heaviest oil and grime from small parts. Also comes with a flow through brush to deal with caked on grime. Designed to sit on 100ltr barrel.

Dimensions:

Length: 760mm (30").

Width: 510mm (20").

Height: 200mm (8").

Weight: 20.8kg.

Working height:

When on 100ltr drum = 890mm (35").


Solvent delivery:

Flow through brush.

General:

Powder coated bowl and galvanised splashback sheet.

Tray is mild steel.

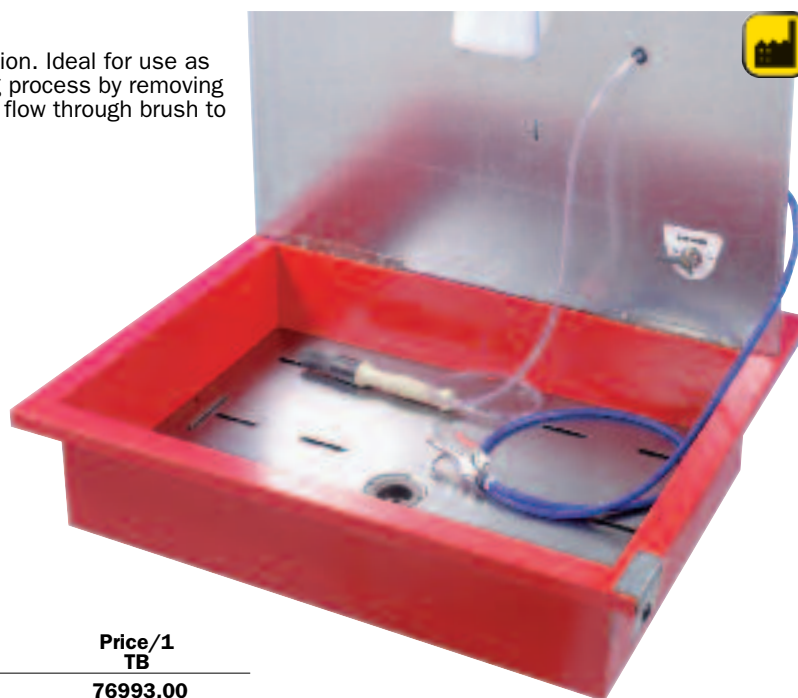

Tray Material	Voltage	Order Code	Price/1 TB
Mild Steel	240V Parts Washer	SOL-727 -5240A	76993.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Parts Washer - Bench Standing

Used in garage, workshop and industrial applications for degreasing components for inspection and prior to assembly. Recirculated cleaning fluid is filtered before entering the pump and being directed over the work piece. Flexible chrome finish metal delivery hose. Heavy duty non-welded one piece tank. Fully enclosed electric nylon pump. Self-latching fusible linked lid closes in the event of a fire. Triple baked enamel finish. Accepts all common degreasing agents. Shelf keeps parts out of solvent during inspection and drying. Immersion soaking when the parts shelf is removed. Fitted with a 3 pin moulded plug and a 1.6m power cable. Minimum agent capacity 9ltr. Maximum agent capacity 13ltr. Rubber feet. 240V.

Overall size (L x W x H): 470 x 340 x 250mm.
Tank size (L x W x H): 400 x 310 x 230mm.
Power rating: 25W.
Voltage: 240V.
Rated input: 0.3A.
Net weight: 6.5kg.



Replacement Parts

Model Number	Weight each	Order Code	Price/1 TB
PWB013	7.60kg	-8600K	4146.00

Description	Order Code	Price/1 TB
Flexible Hose	-6050K	411.00

Parts Washer - Floor Standing

Used in garage, workshop and industrial applications for degreasing components for inspection and prior to assembly. Recirculated cleaning fluid is filtered before entering the pump and being directed over the work piece. Flexible chrome finish metal delivery hose. Heavy duty non-welded one piece tank. Fully enclosed electric nylon pump. Self-latching fusible linked lid closes in the event of a fire. Triple baked enamel finish. Accepts all common degreasing agents. Shelf keeps parts out of solvent during inspection and drying. Immersion soaking when the parts shelf is removed. Fitted with a 3 pin moulded plug and a 1.6m power cable. Minimum agent capacity 40ltr. Maximum agent capacity 50ltr. Fitted with a drain plug for easy maintenance. Removable parts basket. Built in replaceable filter. Spare filter included.

Overall size (L x W x H): 800 x 550 x 890mm.
Tank size (L x W x H): 725 x 490 x 270mm.
Height of working area: 750mm.
Power rating: 25W. **Voltage:** 240V.
Rated input: 0.3A.
Net weight: 31kg.



Replacement Parts

Model Number	Weight each	Order Code	Price/1 TB
PWF050	34.5kg	-8640K	12437.00

Description	Order Code	Price/1 TB
Flexible Hose	-6060K	514.00
Filter for PWF050	-8640K	232.00
Filter for PWB013	-8600K	201.00
Pump for PWF050/PWB013	-8700K	1391.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR