



Maintenance Liquid

AC-90
Displaces water, helps start damp engines, penetrates rust, protects from corrosion, lubricates and stops squeaks. Silicone free, electrically non-conductive and can be used on or near electrical components, motor circuits etc, without affecting insulation or causing short circuits. Available in aerosols that use no CFCs and are ozone friendly or in screw top metal cans.

Does Not Contain Kerosene*, Paraffin* or Naphtha*.

(*These products are used by some other maintenance sprays or water displacing sprays but are associated with skin drying and irritations.)



NEW

Size	Order Code ACN-732	Price/1 TB
250ml Aerosol	-0050K	150.00
425ml Aerosol	-0150K	265.00
5ltr Can	-0200K	1499.00
Applicator	-0500K	199.00



STD Tapping & Drilling Non-Soluble Foam Lubricant

Foam aerosol penetrates and is able to cling to normally inaccessible areas and moving cutting edges. Can be used on yellow metals without the risk of staining.



Size	Order Code SHR-732	Price/1 TB
400ml	-4210K	567.00



Maintenance Spray

SM4-500C 'M4 Plus'

Lubricates: High performance mineral oil based lubricant with PTFE.

Displaces Water:

Helps start damp engines.

Penetrates:

Releases rusty fixings.

Cleans & Protects: Cleans metal surfaces and prevents rusting of treated parts. Does not contain naphtha, kerosene or paraffin which are all associated with operator skin dryness, cracking or dermatitis. CO₂ non-flammable propellant. Does not contain silicone.

Electrically non-conductive at normal ranges found in the home. Care must be taken if used on some electrical plastic components where 'crazing' may occur.



Size	Order Code SOL-732	Price/1 TB
500ml	-0460K	297.00

Multi-Purpose Oil Spray CO₂

SM3-500C

Multi-purpose mineral lubricating oil formulated to have a wide operating range. It lubricates, penetrates, cleans and protects. Use on locks and hinges. Cleans and protects tools. Helps to release stubborn and rusted bolts. Outdoor protection making it ideal for boats. Suitable for household use yet strong enough for industrial applications. Contains a special blend of anti-rust agents which will protect all treated surfaces against corrosion. Does not contain silicone or CFCs.



Size	Order Code SOL-732	Price/1 TB
500ml	-0450K	464.00

Dry Moly Spray

SD1-500B

Premium grade dry molybdenum particle lubricant. Fast drying. Ideal for fastener lubrication. Effective on all grades of steel, copper, brass, stainless steel and foundry equipment where high temperatures are common. Also for open gear lubrication and any location where a wet coating is not acceptable or would burn off. Works at up to load rates of 100,000psi. No silicone content.



Size	Order Code SOL-732	Price/1 TB
500ml	-0200K	979.00

Sherwood STD Liquid (Poly Bottle)

Low odour liquid. Coats the cutting edge with a film of EP additives.

Sherwood STD Compound

Low melting point paste maintains a continual lubricant feed to the cutting edge. Hand applied. Suitable for the most severe cutting operations.



Size	Order Code SHR-732	Price/1 TB
500ml	-4020K	652.00
5ltr	-4060K	5627.00
500g	-4040K	534.00



Air Tool Oil

Excellent air release quality, low foaming ability and resists clogging. Contains anti-rust and anti-wear additives. Extremely resistant to water absorption and can be mixed with all mineral oil based lubricants without draining the system. Can be used on air tools. **ISO Grade VG22.**

EXTENDED RANGE




Size	Order Code KEN-732	Price/1 TB
500ml	-8000K	366.00
5ltr	-8050K	2575.00

SITESAFE

Wire Rope Lube Spray


WRS500
This spray lubricant has been formulated to lubricate and protect wire ropes from corrosion. It has good penetrative qualities to lubricate deep into the core of ropes, displacing water and increasing the life of the rope. 'Hi Tack' additives provide excellent adhesion to metal and reduced 'fling off' during use.

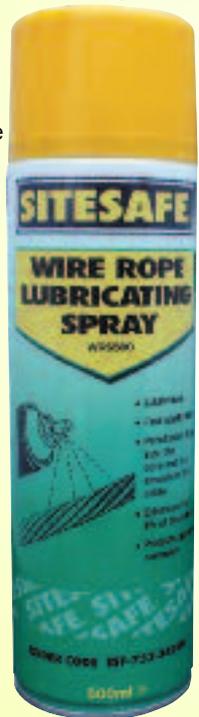

Size	Order Code	Price/1 TB
500ml	-3450K	385.00

Penetrating Spray

POA500
Penetrating oil for dismantling, lubricating and cleaning. This oil displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces.

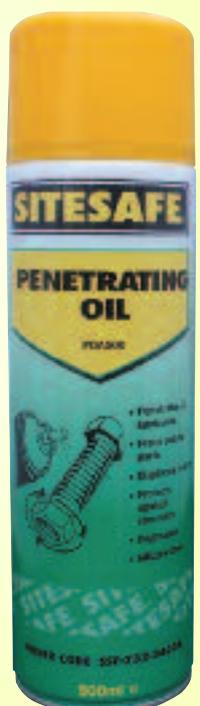

Size	Order Code	Price/1 TB
500ml	-3400K	297.00

SOLENT MAINTENANCE

Penetrating Spray

SM1-500B
Rapidly penetrates into rust and corroded fittings. Allows easy release and dismantling of fittings exposed to heat and great pressure. Can be used on wet metal components, does not contain silicone, CFCs or chlorine. Lubricates threads during release procedure, 30% less dense than water.



Size	Order Code	Price/1 TB
500ml	-0400K	415.00

Copper Grease Spray


SM7 500B - With Graphite
Copper grease spray is particularly effective on commercial/ passenger vehicle braking systems. Extra heavy duty copper grease with graphite. High copper content - effective up to 1100°C. No lead content/no CFCs/no silicone/no chlorinated content. Directional spray button for precision application.



Size	Order Code	Price/1 TB
500ml	-0520K	534.00

Chain & Drive Spray

CCA500
This product is a special blend of quality oils, greases and solvents, designed to lubricate and protect all types of cables and slow moving chains. It penetrates quickly into the centre of cables providing excellent protection to the core. It will not sling off, drip or dry out even in adverse conditions. It will also penetrate chain rollers and links enabling smoother working and reduce friction, wear and the possibility of seizure.

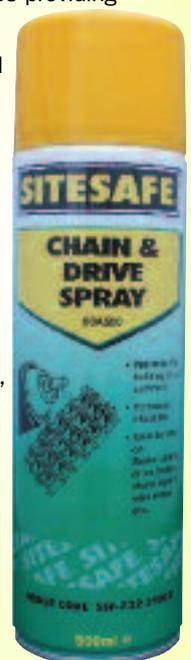

Size	Order Code	Price/1 TB
500ml	-3500K	368.00

Chain & Drive Spray Lubricant

SM6-500B
Formulated to have a wide range of operating uses. Ideal lubricant for moving chains under extreme load and for chains not fitted with automatic lubrication nor running in oil baths. Formulated with a 'tacky additive' to resist 'throw off' on rapidly moving chains and drives. Ideal for fork trucks, conveyer systems, motorcycle chains. Can be used as a general-purpose lubricant for items subjected to extreme weather conditions. Can be used as a slideway lubricant for machine tools. Strong anti-rust qualities. Does not contain silicone or CFCs.



Size	Order Code	Price/1 TB
500ml	-0500K	622.00

Drive Belt Dressing Spray

SBI-500B
Reduces slip on drive belts and helps to stop belt squeal. Can be used on drive belts exposed to weather, ideal for farm machines, alternator drive belts and fan belts. Helps to stop cracking and extends belt life. Can be used on rubber, leather, canvas and most types of synthetic belts.



Size	Order Code	Price/1 TB
500ml	-0060K	728.00

EP Open Gear Spray

SM8-500B - With Molybdenum
Solent EP Open Gear Spray lubricant is a premium extreme pressure lubricant packed in a 500ml aerosol. Based on molybdenum disulphide anti-wear additives. Suitable for lubricating all open gears where a thin film is specified. Suitable for temperatures as low as -40°C to +100°C.



Size	Order Code	Price/1 TB
500ml	-0540K	977.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR



Silicone Mould Release

SR1-500B - For Plastic and Rubber

Heavy duty silicone lubricant and release agent. Formulated with a high silicone content.

The product is suitable for a wide range of uses.

SR1-500B is a dry, non-oily, non-greasy product. Water clear with no odour.



Size	Order Code SOL-732	Price/1 TB
500ml	-0700K	770.00

Silicone Mould Release

SR2-500B - Heavy Duty

Heavy duty silicone lubricant and release agent. Formulated with a high silicone content. Suitable for a wide range of uses. SR2-500B is a dry non-oily, non-greasy product. Water clear with no odour.



Size	Order Code SOL-732	Price/1 TB
500ml	-0720K	859.00

PTFE Mould Release

SR3-500B - Dry Film

Provides a micro-thin surface coating for the inner surfaces of injection moulding tools/dies, thus enabling easy component release. The coating will not bridge complex mould profiles and will not interfere with precision fits.

The applied PTFE film will not transfer to the moulded item and can be used where a dry slip surface is required such as production line slides, tracks or tables.



Size	Order Code SOL-732	Price/1 TB
500ml	-0740K	829.00

Silicone Mould Release



SR4-500B - For Polyurethane

Specifically for use with integral skin and elastomeric polyurethanes. Provides high gloss finish, low build-up on the mould surface generated to 200°C. Silicone based product may not be suitable for use where painting, plating work is required.



NEW

Size	Order Code SOL-732	Price/1 TB
500ml	-9700K	670.00

Silicone Mould Release

SR6-500B - Thermoplastic

Silicone based. Formulated to provide effective release of plastics with lower melt temperatures.

Effective with natural rubbers. Effective to 200°C, excellent surface finish.



NEW

Size	Order Code SOL-732	Price/1 TB
500ml	-9720K	773.00

Silicone Free Mould Release

SN1-500B - For Plastic and Rubber

Specifically formulated for rapid release of moulded components.

Particularly suitable for moulded items which require further process, eg painting, printing and thermo welding.



NEW

Size	Order Code SOL-732	Price/1 TB
500ml	-9680K	773.00



Concentrated Screen Wash

Solent™ screenwash can be used all year round and is the ideal way to keep your windscreen clean and clear of insects, road grime and traffic film. The anti-smear formula leaves a crystal clear windscreen with every wash and resists freezing. Ideal for winter motoring. Contains water softeners.

Dilution Recommendation

Summer: 25% 1 part wash to 3 parts water.

Winter: 50% 1 part wash to 1 part water.

Harsh Winter: use neat.



Size	Order Code SOL-732	Price/1 TB
5ltr	-9400K	361.00
25ltr	-9420K	1288.00



Blue Anti-freeze & Coolant

Suitable for all engine types. Provides year round protection. Prevents freezing in the winter and overheating in the summer. Contains anti-corrosion additives. Inhibits rust for up to 2 years. Works to temperatures of -55°C. It is ready mixed, requires no dilution.



NEW

Size	Order Code SOL-740	Price/1 TB
1ltr	-5853D	258.00
5ltr	-5853H	979.00
20ltr	-5855C	4635.00



Leak Detector Spray

LDA500

For checking for the most minute leaks in any gas or air pressurised systems including commercial vehicle air brakes and pressure vessels.

Contains no alcohols or solvents, is not caustic and contains a rust inhibitor. Spray directly onto the suspect area using the extension tube and examine for bubbling which will indicate leakage.



Size	Order Code	Price/1 TB
500ml	-3340K	314.00

De-ionised Water

DW25

For use in lead-acid car batteries. Also suitable for domestic appliances such as steam irons and steam cleaners, avoids problems caused by scaling. Can be used as a final rinse in car washing to avoid 'spotting'. Also suitable for rinsing scientific glassware.



Size	Order Code	Price/1 TB
25ltr	-4250K	1025.00




Leak Detector Spray

SL1-400A

A specially formulated, performance white fluid, designed to identify even the smallest gaseous leak. Applies a thin uniform film of surface active agents which identifies any leak or bleeding of joints.

Bubbles in the film indicate the location of the leak. Will not give a false reading if mechanical sensing equipment is used. Suitable for use with most common gases.

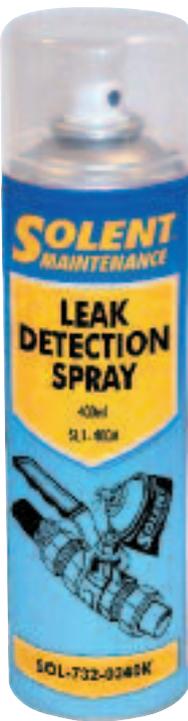

Size	Order Code	Price/1 TB
400ml	-0340K	468.00

Fault Detector Freeze Spray

NEW

SFC-415F

Fault Detector Freezer spray is a very cold rapidly evaporating high pressure gas jet. Applying to electronic components will lower the temperature of the component. Any faulty overheating component will cool and return to correct operation, thus indicating the faulty component. Cools objects very rapidly down to temperatures of -50°C.

Can also be used to shrink fit metal parts where the application of heat would be inappropriate and can be used to freeze chewing gum deposits to aid removal.

Size: 415ml



Size	Order Code	Price/1 TB
415ml	-9580K	599.00

3-Part Flaw Detector Inspection System

Fast reliable method for visually inspecting and spot-checking surfaces of welds, exotic alloys or standard metals, highly stressed structural members, critical castings, shafts, gears, spindles, and any other hard part where identification of surface flaws is essential. Detects flaws such as cracks, pin holes, welding laps and porosity either during manufacture or on-site.



Flaw Detector Cleaner Spray

SF1-500B

Quick drying, powerful solvent for cleaning surfaces prior to testing. Removes contaminants including oils, greases and grime.

Size	Order Code	Price/1 TB
500ml	-0240K	889.00

Flaw Detector Dye Penetrant

SF2-500B

Highly sensitive red dye, for use when detecting flaws on metal components under normal lighting conditions.

Size	Order Code	Price/1 TB
500ml	-0260K	889.00

Flaw Detector Developer

SF3-500B

White film to highlight any faults which have been detected when using Flaw Detector Penetrant. The product should be removed using Flaw Detector Cleaner Spray once cracks have been found and marked.

Size	Order Code	Price/1 TB
500ml	-0280K	889.00

Water Based Anti-Spatter Fluid

SW2-400C

No solvent or silicone content. Fine spray pattern gives good coverage, prevents spatter build-up on jigs, work. Ideal where further process work is involved, eg painting, galvanising with a rust inhibitor.



NEW

Size	Order Code	Price/1 TB
500ml	-9740K	670.00

Welder's Anti-Spatter Spray

SW1-400C

Solvent-based coating applied to metal before welding to prevent spatter from sticking to the metal. CO₂ propelled aerosol. Non-flammable. Silicone-free and removable with solvents prior to galvanising or painting.



Size	Order Code	Price/1 TB
400g	-0840K	325.00

Welder's Anti-Spatter Fluid

Reduces the risk of joint puddling and greatly reduces preparation time prior to final painting. Does not affect any subsequent galvanising or painting operations. Evaporates under normal weld temperatures. Dichloromethane and silicone-free. Non-flammable, non-toxic, non-corrosive and bio-degradable.



Size	Order Code	Price/1 TB
5ltr	-9300K	592.00
20ltr	-9310K	1777.00