



**KENNEDY** **A18 Mig Wire Reels**

Deposits C - 1.3% Mn weld metal for mild and medium tensile steels. Copper coat finish and double deoxidised. For use with CO<sub>2</sub> or Ar-CO<sub>2</sub> shielding gas. Made to **BS 2901/1 : 1983 A18 & BS EN 440 G3 Si1**. For welding mild steel and C-Mn steels such as boilers, tanks, pipework, machinery, vehicle chassis fabrication and shipbuilding. 0.7kg and 5.0kg reels are random wound. Both sizes are designed and packaged for use on Kennedy Dual Mig welders, Mini Migs, Migmates etc. Use with CO<sub>2</sub> or Ar-CO<sub>2</sub> shielding gas.



**0.7kg Mini Reels**

**FOR MILD STEEL & C-Mn STEEL**

**A18 BS 2901**



Product Number	Wire Dia.	Order Code KEN-887	Price/1 TB
A18-060-0.7	0.6mm	-1860K	258.00
A18-080-0.7	0.8mm	-1880K	258.00
A18-100-0.7	1.0mm	-1900K	357.00

**5.0kg Reels**

**FOR MILD STEEL & C-Mn STEEL**

**A18 BS 2901**



Product Number	Wire Dia.	Order Code KEN-887	Offer Price/1
A18-060-5.0	0.6mm	-1960K	1339.00
A18-080-5.0	0.8mm	-1980K	1339.00
A18-100-5.0	1.0mm	-2000K	1133.00


**15kg Reels**

Use with CO<sub>2</sub> or Ar-CO<sub>2</sub> shielding gas.

**FOR MILD STEEL & C-Mn STEEL**

**PLW 15kg Reels**

**A18 BS 2901**

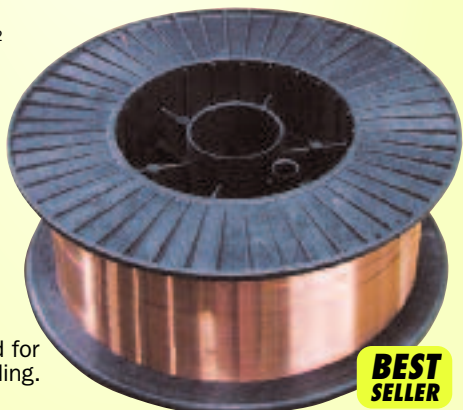

\*Precision layer wound for positive snag free feeding.

**BEST SELLER**

Product Number	Wire Diameter	Order Code KEN-887	Price/1 TB
*A18-060-15.0	0.6mm	-2060K	3605.00
*A18-080-15.0	0.8mm	-2080K	3682.00
*A18-100-15.0	1.0mm	-2100K	3966.00
*A18-120-15.0	1.2mm	-2120K	3966.00

**Flux Core Gasless Wire**

General-purpose Mig wire with self-shielding flux core, allowing it to be used without the need for a separate shielding gas. Designed and packaged specifically for use on Kennedy Dual Mig welders, Mini Migs, Migmates etc. For welding mild steel and C-Mn steels such as boilers, tanks, pipework, machinery, vehicle chassis fabrication. 0.8mm diameter mini reels. Random wound and not layer wound.



**FOR MILD STEEL & C-Mn STEEL**

**A18 BS 2901**


Product Number	Reel Size	Order Code KEN-887	Price/1 TB
FCG-080-0.45	0.45kg	-1620K	736.00
FCG-080-0.9	0.90kg	-1640K	1212.00

**Stainless Steel Mig Wire**

Ideal for welding stainless steels. It has increased silicon content for an improved weld that produces a smoother more consistent bead making it ideal for use where appearance is important. For use on stainless steel structures. Supplied on a precision layer wound reel for positive uninterrupted feeding.

Weight: 15kg.

**FOR STAINLESS**

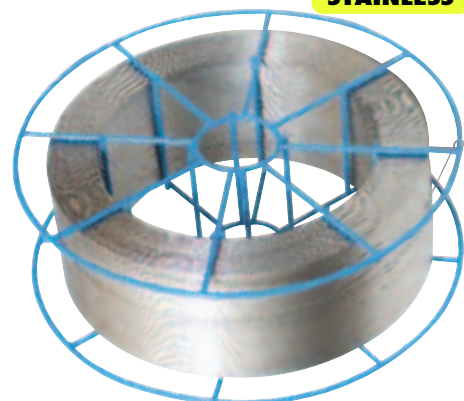

Type	Wire Diameter	Order Code KEN-887	Price/1 TB
308LSi	0.8mm	-0520K	11845.00
308LSi	1.0mm	-0530K	11845.00
309LSi	1.0mm	-0570K	11845.00
316LSi	0.8mm	-0540K	11330.00
316LSi	1.8mm	-0550K	11330.00
316LSi	1.2mm	-0560K	11845.00

**MIG Wire - All prices are subject to possible surcharges due to continued volatility of material costs. Please contact your local branch for details.**