

MATLOCK**Webbing Slings**

High strength to weight ratio, light to handle and easy to use. Shock absorbing construction and wide load bearing area produce a secure grip and eliminate damage to the load. All types are made from oil and acid resistant polyester, treated with a wear resistant impregnation. All sizes are colour coded to indicate 'SWL' (safe working load), rating and marked with traceability code. These ratings are for a straight line pull only. Other variations of pull are shown below along with the relevant 'SWL'.

All slings come complete with test certificate.

**Supplied with
Certificate of
Conformity**


Safe Working Loads

Straight Line	Choker	Basket	Basket 90°*	Basket 120°*
1,000kg	800kg	2,000kg	1,400kg	1,000kg
2,000kg	1,600kg	4,000kg	2,800kg	2,000kg
3,000kg	2,400kg	6,000kg	4,200kg	3,000kg
4,000kg	3,200kg	8,000kg	5,600kg	4,000kg
6,000kg	4,800kg	12,000kg	8,400kg	6,000kg

Flat Slings

With flat metal reinforced eye at each end.

Made to
BS 3481:2.



Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942	Price/1 TB
Simplex Type - Single Thickness				
2	60	1,000	-5010K	583.00
	120	2,000	-5020K	1365.00
	180	3,000	-5030K	2101.00
3	60	1,000	-5110K	810.00
	120	2,000	-5120K	1705.00
	180	3,000	-5130K	2611.00
4	60	1,000	-5210K	968.00
	120	2,000	-5220K	1988.00
	180	3,000	-5230K	3121.00
Duplex Type - Double Thickness				
2	30	1,000	-5510K	453.00
	60	2,000	-5520K	742.00
	90	3,000	-5530K	1054.00
	120	4,000	-5540K	1875.00
	150	5,000	-5550K	2384.00
3	30	1,000	-5610K	742.00
	60	2,000	-5620K	1082.00
	90	3,000	-5630K	1478.00
	120	4,000	-5640K	2611.00
	150	5,000	-5650K	2951.00
4	30	1,000	-5710K	968.00
	60	2,000	-5720K	1365.00
	90	3,000	-5730K	2101.00
	120	4,000	-5740K	3631.00
	150	5,000	-5750K	3857.00
6	30	1,000	-5810K	1535.00
	60	2,000	-5820K	1988.00
	90	3,000	-5830K	3008.00
	120	4,000	-5840K	4254.00
	150	5,000	-5850K	5812.00

Endless Round Slings


Made to **BS 6668 : Part 2.**



Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942	Price/1 TB
0.5	40	1,000	-1960K	317.00
	50	2,000	-1970K	447.00
	60	3,000	-1980K	567.00
	80	5,000	-2000K	782.00
1	40	1,000	-2010K	419.00
	50	2,000	-2020K	515.00
	60	3,000	-2030K	657.00
	80	5,000	-2050K	861.00
1.5	40	1,000	-2060K	782.00
	50	2,000	-2070K	793.00
	60	3,000	-2080K	997.00
	70	4,000	-2090K	1087.00
80	5,000	-2100K	1552.00	
2.0	40	1,000	-2110K	515.00
	50	2,000	-2120K	855.00
	60	3,000	-2130K	1251.00
	70	4,000	-2140K	1478.00
80	5,000	-2150K	1807.00	
2.5	40	1,000	-2160K	793.00
	50	2,000	-2170K	1115.00
	60	3,000	-2180K	1591.00
	70	4,000	-2190K	1818.00
80	5,000	-2200K	2266.00	
3.0	40	1,000	-2210K	827.00
	50	2,000	-2220K	1144.00
	60	3,000	-2230K	1705.00
	70	4,000	-2240K	2045.00
	80	5,000	-2250K	2554.00

Ratchet Cable Puller - 1300kg

Robustly constructed from galvanised steel with a powder coated body, hardened steel hooks with spring catches. It has a heavy duty swivel on the anchoring hook, 3.6m of 5mm aircraft cable giving a 1.5m pull and a sprung ratchet pawl. Suitable for pulling: trees, roots, fencing wires, vehicles, machines, boats, trailers, caravans etc.

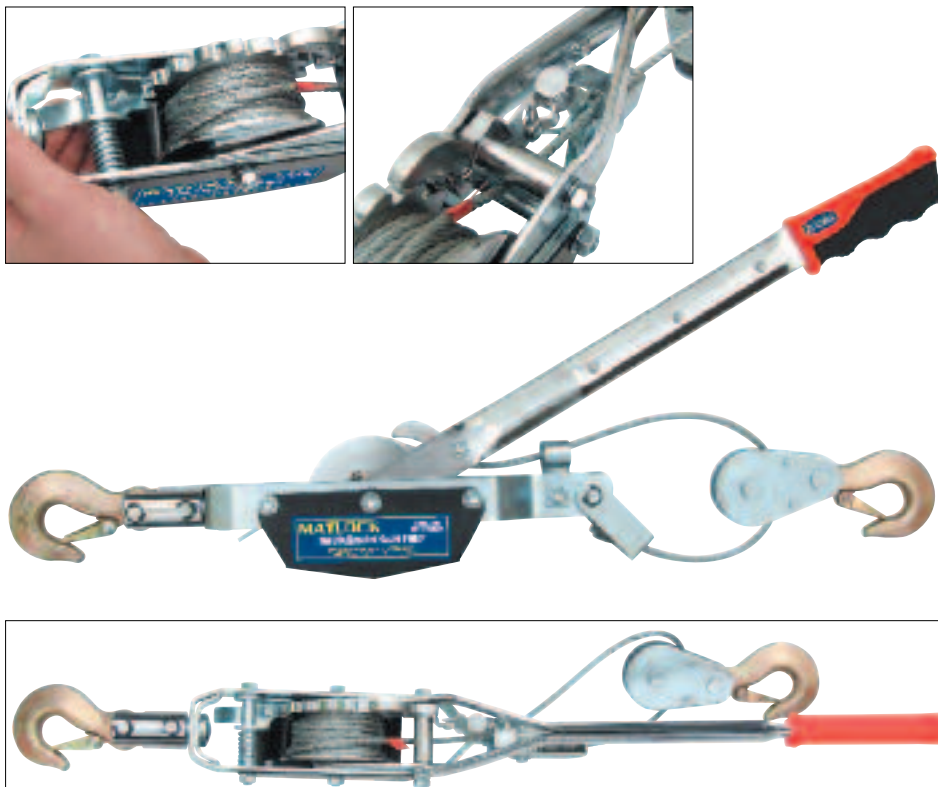


Capacity	Order Code MTL-941	Price/1 TB
1300kg	-2020K	2426.00

Chain Hoist

Made from high grade materials with alloy steel gears and hooks.

The unique, specialised outer design allows extra strength, durability and ensures protection of the gears from impact and dust. All load and hand chains are calibrated and supplied in an electro galvanised finish. The load chain is hardened grade 80 alloy steel. All top and bottom hooks are fitted with cast steel, heavy-duty catches. Blocks are to **B53243**. Chain is to **ISO 1834**.

The chain block is not only strong and durable but is safe and light, suitable for all capacity rated applications.

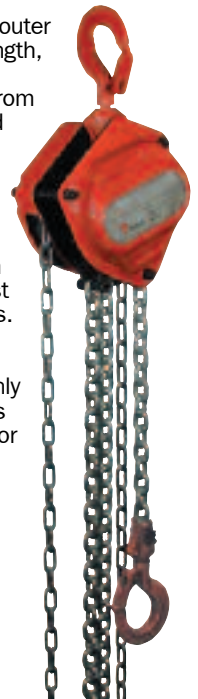

Capacity (Ton)	0.5	1	2	3	5
Standard Lift (M)	2.5	2.5	2.5	3	3
Running Test Load (Ton)	0.75	1.5	3	4.5	6.25
No. Columns of Load Chains	1	2	2	2	2
Load Chain Diameter (mm)	6	6	6	8	10

Capacity (TON)	Order Code MTL-941	Price/1 TB
0.5	-4010K	6520.00
1.0	-4020K	8163.00
2.0	-4030K	12468.00
3.0	-4040K	14168.00
5.0	-4050K	17445.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

Ideal for home workshops or garages. Folding design for easy storage and transportation. Flow control valve for precise lowering and positioning. Overload safety valve. Hydraulic operation providing easy lifting. Heavy duty swivel hook with safety latch. four different jib options. Heavy duty castors.






NEW

**1
TONNE**

Model number	FMC001.
Order Code	KEN-985-3500K.
Lifting capacity position (a)	1 Tonne/1,000kg.
Lifting capacity position (b)	3/4 Tonne/750kg.
Lifting capacity position (c)	1/2 Tonne/500kg.
Lifting capacity position (d)	1/4 Tonne/250kg.
Maximum lifting height at minimum jib extension	1868mm.
Maximum lifting height at maximum jib extension	2004mm.
Length of jib in position (a)	865mm.
Length of jib in position (b)	955mm.
Length of jib in position (c)	1045mm.
Length of jib in position (d)	1135mm.
Clearance height of legs	130mm.
Length of frame	1480mm.
Overall clearance height	1555mm.
Maximum width of frame	1000mm.
Distance between rear wheel centres	640mm.
Weight	91kg.

1 tonne (metric ton or t) = 1000kg
1 ton (imperial ton) = 2240lbs (1016kg)

SITE MAINTENANCE

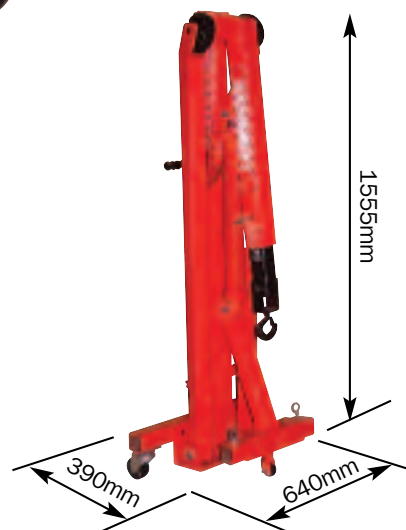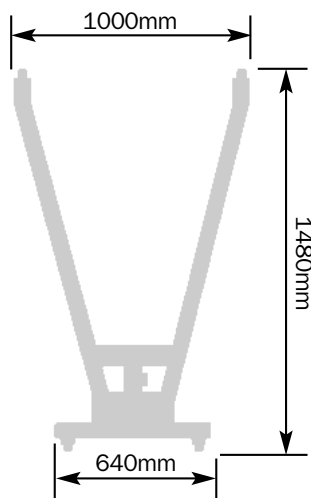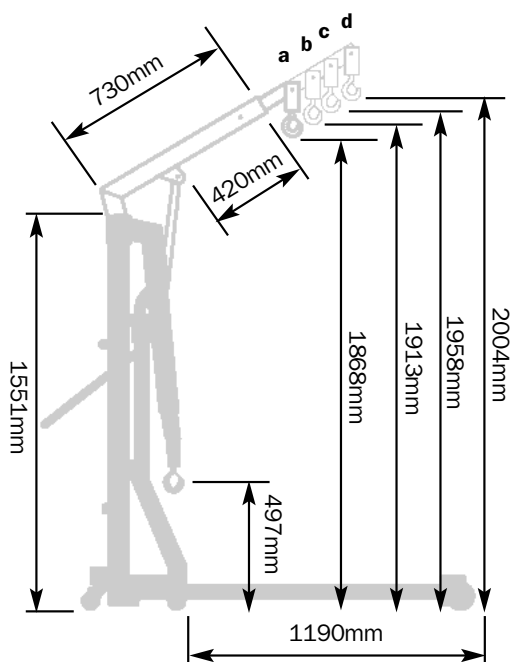

Model Number	Capacity	Max. Hook Height (mm)	Weight each	Order Code KEN-941	Price/1 TB
FMC001	1 Tonne	2445	91kg	-3670K	31935.00
Spares for above	Description		Weight each	Order Code KEN-567	Price/1 TB
	Seal Repair Kit		9g	-8200K	258.00
	Replacement Ram			-8800K	8755.00