




Technical data

Designation	TKED 1
Power supply	4,5V 3 × AAA Alkaline type IEC LR03
Time control:	
– pre-sets	10 or 30 seconds
– default	indefinite
Operational and storage temperature	0 to 50 °C (32 to 122 °F) –20 to +70 °C (–4 to +158 °F)
Ingress protection level	IP 55
Display	LCD counter range: 0 to 99 999 discharges. User selectable backlight and low battery warning
Carrying case dimensions	260 × 85 × 180 mm (10.3 × 3.4 × 7.0 in.)
Total case and contents weight	0,4 kg (0.88 lb)



Lubricant degradation caused by electrical discharge currents

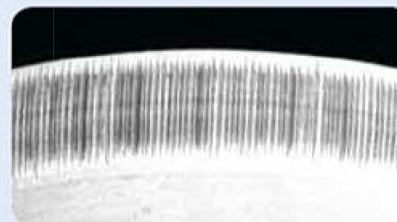

Fluting marks characteristic of electrical erosion in bearings